ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Find the *Yaskawa SGDL-01AS* at our website: ***Click HERE***

Σ-L Series SGML/SGDL (for speed/torque control)

USER'S MANUAL

AC Servomotor and Driver

SGML Servomotor
SGDL-□□□S Servopack

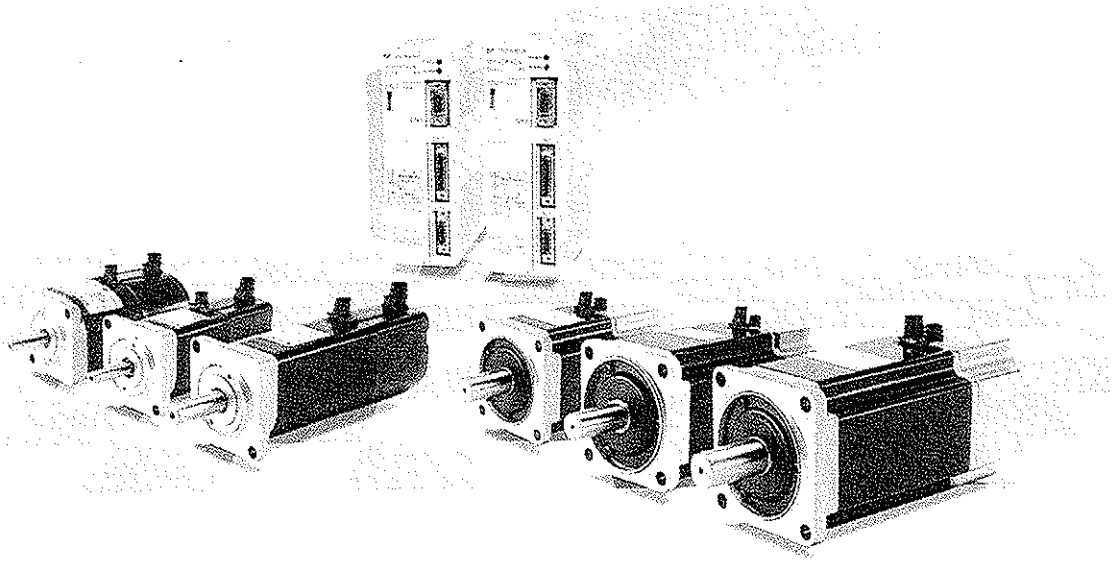

YASKAWA

MANUAL NO. SIE-S800-15.32B

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

This manual covers the products of the Σ-L Series SGML/SGDL, which feature superior functions and performance. This manual was designed to provide comprehensible information for users who are about to use a servo for the first time as well as for users who already have experience in using servos. This manual enables users to understand how to design, install, operate, and maintain a servo system. Keep this manual in a convenient location and refer to it whenever necessary in operating and maintaining the servo system.

General Precautions

- Some drawings in this manual are shown with the protective cover or shields removed, in order to describe the detail with more clarity. Make sure all covers and shields are replaced before operating this product.
- Some drawings in this manual are shown as typical example and may differ from the shipped product.
- This manual may be modified when necessary because of improvement of the product, modification or changes in specifications.
  Such modification is made as a revision by renewing the manual No.
- To order a copy of this manual, if your copy has been damaged or lost, contact your YASKAWA representative listed on the last page stating the manual No. on the front cover.
- YASKAWA is not responsible for accidents or damages due to any modification of the product made by the user since that will void our guarantee.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

NOTES FOR SAFE OPERATION

Read this manual thoroughly before installation, operation, maintenance or inspection of the AC Servo Drives. In this manual, the NOTES FOR SAFE OPERATION are classified as "WARNING" or "CAUTION".

⚠ WARNING

Indicates a potentially hazardous situation which, if not avoided, could result in death or serious personal injury.

⚠ CAUTION

Indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate personal injury and/or damage to the equipment.

In some instances, items described in ⚠ CAUTION may also result in a serious accident. In either case, follow these important items.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

⚠ WARNING

(WIRING)

- Grounding must be in accordance with the national code and consistent with sound local practices.
  Failure to observe this warning may lead to electric shock or fire.

(OPERATION)

- Never touch any rotating motor parts or machine movable part during operation.
  Failure to observe this warning may result in personal injury.

(INSPECTION AND MAINTENANCE)

- Be sure to turn OFF power before inspection or maintenance.
  Otherwise, electric shock may result.
- Never open the terminal cover while power is ON, and never turn ON power when the terminal cover is open.
  Otherwise, electric shock may result.
- After turning OFF power, wait at least five minutes before servicing the product.
  Otherwise, residual electric charges may result in electric shock.

⚠ CAUTION

(RECEIVING)

- Use the specified combination of SERVOMOTOR and SERVOPACK.
  Failure to observe this caution may lead to fire or failure.

(INSTALLATION)

- Never use the equipment where it may be exposed to splashes of water, corrosive or flammable gases, or near flammable materials.
  Failure to observe this caution may lead to electric shock or fire.

(WIRING)

- Do not connect three–phase power supply to output terminals Ⓤ Ⓥ and Ⓦ.
  Failure to observe this caution may lead to personal injury or fire.
- Securely tighten screws on the power supply and motor output terminals.
  Failure to observe this caution can result in a fire.
- Never change wiring while power is ON.
  Failure to observe this caution may result in electric shock or personal injury.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

⚠ CAUTION

(OPERATION)

- To avoid inadvertent accidents, run the SERVOMOTOR only in test run (without load).
  Failure to observe this caution may result in personal injury.
- Before starting operation with a load connected, set up user constants suitable for the machine.
  Starting operation without setting up user constants may lead to overrun failure.
- Before starting operation with a load connected, make sure emergency-stop procedures are in place.
  Failure to observe this caution may result in personal injury.
- During operation, do not touch the heat sink.
  Failure to observe this caution may result in burns.

(INSPECTION AND MAINTENANCE)

- Do not disassemble the SERVOMOTOR.
  Failure to observe this caution may result in electric shock or personal injury.
- Never change wiring while power is ON.
  Failure to observe this caution may result in electric shock or personal injury.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Manual Contents

This manual provides Σ-L Series users with information on the following:

- Checking the product on delivery and basic applications of the servo.
- Servo applications.
- Selecting an appropriate servo for your needs and placing an order.
- Inspection and maintenance.

Manual Structure

All chapters in this manual are classified into one or more of three areas according to their contents: A, B, and C. Refer to the applicable chapters for the information you require.

A: Chapters explaining how to select a servo: For users who wish to gain a basic understanding of Σ-LSeries products or who need to select an appropriate servo.

B: Chapters explaining how to design a servo system: For users who are about to design, install, and operate a Σ-L Series Servo Control System.

C: Chapters explaining maintenance: For users who are going to maintain and troubleshoot Σ-L Series products.

Chapter	Title	Page	Area
CHAPTER 1	**Basic Uses of Σ-L series Products** Describes steps to take when product is received, plus basic wiring and application methods.	1	B
CHAPTER 2	**Applications of Σ-L series Products** Describes the effective usage of Σ-L Series features according to application.	31	B
CHAPTER 3	**Using the Digital Operator** Describes operating procedures for Σ-L Series servos, turning features ON and OFF, setting control constants, etc.	97	B
CHAPTER 4	**Servo Selection and Data Sheets** Describes selection methods for Σ-L Series servos and peripherals and provides servo specifications.	129	A, B
CHAPTER 5	**Inspection, Maintenance, and Troubleshooting** Describes user maintenance and troubleshooting.	217	C
APPENDIXES			
A	Servo Adjustment	237	B, C
B	List of I/O Signals	247	A, B, C
C	List of User Constants	253	B, C
INDEX		256	A, B, C

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Basic Terms

Unless otherwise specified, the following definitions are used:

Servomotor: Σ-L Series SGML Servomotor


Servopack: An amplifier (Trademark of Yaskawa servo amplifier "SGDL Servopack")

Servodrive: A SGML Servomotor and an amplifier (SGDL Servopack)

Servo system: A complete servo control system consisting of servodrive, host controller, and peripheral devices

Visual Aids


The following aids are used to indicate certain types of information for easier reference.



Indicates references for additional information.




Technical terms placed in bold in the text are briefly explained in a "TERMS" section at the bottom of the page. The following kinds of technical terms are explained: Technical terms that need to be explained to users who are not very familiar with servo systems or electronic devices and technical terms specific to Σ-L Series Servos that need to be explained in descriptions of functions.



JUSP-OP02A-1

The text indicated by this icon explains the operating procedure using hand-held type digital operator (Type: JUSP-OP02A-1).



JUSP-OP03A

The text indicated by this icon explains the operating procedure using mount type digital operator (Type: JUSP-OP03A).

NOTE A Σ-L Series Servodrive alone cannot ensure the functionality and performance of the entire machine control system. It must be combined with an appropriate machine and host controller so that the entire control system works properly. Therefore, carefully read the instruction manuals for the machine to be used before attempting to operate the servodrive.

©Yaskawa, 1998

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form, or by any means, mechanical, electronic, photocopying, recording, or otherwise, without the prior written permission of Yaskawa. No patent liability is assumed with respect to the use of the information contained herein. Moreover, because Yaskawa is constantly striving to improve its high-quality products, the information contained in this manual is subject to change without notice. Every precaution has been taken in the preparation of this manual. Nevertheless, Yaskawa assumes no responsibility for errors or omissions. Neither is any liability assumed for damages resulting from the use of the information contained in this publication.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

CONTENTS

CHAPTER 1 BASIC USES OF Σ-L SERIES PRODUCTS 1

1.1 Precautions 2
1.1.1 Notes on Use 2
1.2 Installation 4
1.2.1 Checking on Delivery 4
1.2.2 Installing the Servomotor 5
1.2.3 Installing the Servopack 8
1.2.4 Power Loss 10
1.3 Connection and Wiring 11
1.3.1 Connecting to Peripheral Devices 11
1.3.2 Main Circuit Wiring and Power ON Sequence 14
1.3.3 Examples of Connecting I/O Signal Terminals 16
1.4 Conducting a Test Run 20
1.4.1 Test Run in Two Steps 20
1.4.2 Step 1: Conducting a Test Run for Motor without Load 22
1.4.3 Step 2: Conducting a Test Run with the Motor Connected to the Machine 26
1.4.4 Supplementary Information on Test Run 28
1.4.5 Minimum User Constants Required and Input Signals 29

CHAPTER 2 APPLICATIONS OF Σ-L SERIES PRODUCTS 31

2.1 Setting User Constants According to Machine Characteristics 34
2.1.1 Changing the Direction of Motor Rotation 34
2.1.2 Setting the Overtravel Limit Function 35
2.1.3 Restricting Torque 36
2.2 Setting User Constants According to Host Controller 43
2.2.1 Inputting Speed Reference 43
2.2.2 Using Encoder Output 47
2.2.3 Using Contact I/O Signals 49
2.2.4 Using Contact Input Speed Control 51
2.2.5 Using Torque Control 55
2.2.6 Using Torque Restriction by Analog Voltage Reference 61
2.3 Setting Up the Σ-L Servopack 62
2.3.1 Using Autotuning Function 62
2.3.2 Setting Servo Gain 62
2.3.3 Setting the Torque Reference Filter Time Constant 63
2.3.4 Using the Soft Start Function 64
2.3.5 Using Proportional Control 64
2.3.6 Setting the Mode Switch Level 65
2.4 Setting Stop Mode 67
2.4.1 Adjusting Offset 67
2.4.2 Dynamic Brake 68
2.4.3 Using Zero-Clamp 68
2.4.4 Using Holding Brake 70
2.5 Forming a Protective Sequence 72
2.5.1 Using Servo Alarm Output and Alarm Code Output 72
2.5.2 Using Servo ON Input Signal 75
2.5.3 Using Running Output Signal 76
2.5.4 Handling of Power Failure 78

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

CONTENTS

2.6 Special Wiring 80
2.6.1 Wiring Instructions 80
2.6.2 Wiring for Noise Control 82
2.6.3 Using More Than One Servo Drive 87
2.6.4 Using Regenerative Units 88
2.6.5 Using SGDL Servopack with High Voltage Line 91
2.6.6 Connector Terminal Layouts 93

CHAPTER 3 USING THE DIGITAL OPERATOR 97
3.1 Basic Operations 98
3.1.1 Connecting the Digital Operator 98
3.1.2 Resetting Servo Alarms 99
3.1.3 Basic Functions and Mode Selection 100
3.1.4 Operation in Status Display Mode 101
3.1.5 Operation in User Constant Setting Mode 102
3.1.6 Operation in Monitor Mode 107
3.2 Using the Functions 110
3.2.1 Operation in Alarm Trace-back Mode 110
3.2.2 Operation Using the Digital Operator 112
3.2.3 Autotuning 115
3.2.4 Clearing Alarm Trace-back Data 121
3.2.5 Checking Motor Type 122
3.2.6 Checking Software Version 123
3.2.7 Speed Reference Offset Automatic Adjustment 123
3.2.8 Speed Reference Offset Manual Adjustment Mode 126

CHAPTER 4 SERVO SELECTION AND DATA SHEETS 129
4.1 Selecting a Σ-L Series Servo 131
4.1.1 Selecting a Servomotor 131
4.1.2 Selecting a Servopack 142
4.1.3 Selecting a Digital Operator 144
4.2 SGML Servomotor 145
4.2.1 Ratings and Specifications 145
4.2.2 Mechanical Characteristics 154
4.3 Servopack Ratings and Specifications 156
4.3.1 Ratings and Specifications 156
4.3.2 Overload Characteristics 159
4.3.3 Starting Time and Stopping Time 160
4.3.4 Load Inertia 160
4.3.5 Overhanging Loads 162
4.3.6 Power Consumption 163
4.4 Σ-L Series Dimensional Drawings 164
4.4.1 Servomotor Dimensional Drawings 164
4.4.2 Servopack Dimensional Drawings 178
4.4.3 Digital Operator Dimensional Drawings 181
4.5 Selecting Peripheral Devices 182
4.5.1 Selecting Peripheral Devices 182

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

CONTENTS

4.6 Specifications and Dimensional Drawings of Peripheral Devices 187
4.6.1 Cable Specifications and Peripheral Devices 187
4.6.2 Motor Cables 190
4.6.3 Connector Kits 193
4.6.4 Brake Power Supply 197
4.6.5 Encoder Cables 199
4.6.6 CN1 Connector 203
4.6.7 Connector Terminal Block Converter Unit 205
4.6.8 Cable With CN1 Connector and One End Without Connector 207
4.6.9 Circuit Breaker 207
4.6.10 Noise Filter 208
4.6.11 Magnetic Contactor 209
4.6.12 Surge Suppressor 210
4.6.13 Regenerative Unit 211
4.6.14 Cables for Connecting PC and Servopack 213

CHAPTER 5 INSPECTION, MAINTENANCE, AND TROUBLESHOOTING 217

5.1 Inspection and Maintenance 218
5.1.1 Servomotor 218
5.1.2 Servopack 219
5.2 Troubleshooting 220
5.2.1 Troubleshooting Problems with Alarm Display 220
5.2.2 Troubleshooting Problems With No Alarm Display 233
5.2.3 Internal Connection Diagram and Instrument Connection Examples 234

APPENDIXES

A.1 Σ-L Series AC Servopack Gain Adjustment 238
A.1.1 Σ-L Series AC Servopacks and Gain Adjustment Methods 238
A.1.2 Basic Rules for Gain Adjustment 239
A.2 Adjusting a Speed-control Servopack 240
A.2.1 Adjusting Using Auto-tuning 240
A.2.2 Manual Adjustment 241
A.3 Gain Setting References 244
A.3.1 Guidelines for Gain Settings According to Load Inertia Ratio 244

B List of I/O Signals 247

C List of User Constants 253

INDEX

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

1 BASIC USES OF Σ-L SERIES PRODUCTS

This chapter describes the first things to do when Σ-L Series products are delivered. It also explains the most fundamental ways of connecting and operating Σ-L Series products. Both first-time and experienced servo users **must read** this chapter.

1.1 Precautions 2
1.1.1 Notes on Use 2

1.2 Installation 4
1.2.1 Checking on Delivery 4
1.2.2 Installing the Servomotor 5
1.2.3 Installing the Servopack 8
1.2.4 Power Loss 10

1.3 Connection and Wiring 11
1.3.1 Connecting to Peripheral Devices 11
1.3.2 Main Circuit Wiring and Power ON Sequence 14
1.3.3 Examples of Connecting I/O Signal Terminals 16

1.4 Conducting a Test Run 20
1.4.1 Test Run in Two Steps 20
1.4.2 Step 1: Conducting a Test Run for Motor without Load 22
1.4.3 Step 2: Conducting a Test Run with the Motor Connected to the Machine 26
1.4.4 Supplementary Information on Test Run 28
1.4.5 Minimum User Constants Required and Input Signals 29

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

1.1 Precautions

This section provides notes on using Σ-L Series products.


1.1.1 Notes on Use 2

1.1.1 Notes on Use

NOTE Always note the following to ensure safe use.


Two types of supply voltage are available, 100 V and 200 V.

Both Σ-L Series Servomotor and Servopack have 100 V and 200 V types. Be sure to use the correct type.

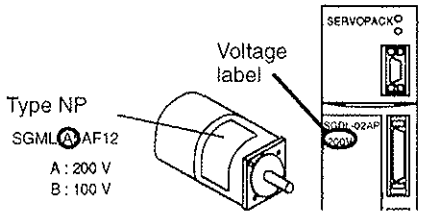


Always use the SGML Servomotor and SGDL Servopack in pairs.

The SGML Servomotor cannot run without the SGDL Servopack.
Do not plug the SGML Servomotor directly into the commercial power supply. (Direct connection to the commercial power supply will damage the Servomotor.)

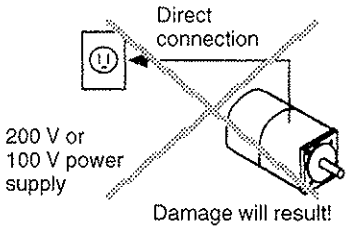


Do not change wiring when power is ON.

Always turn the power OFF before connecting or disconnecting a connector.
(Except for Digital Operator (Types: JUSP-OP02A-1, JUSP-OP03A))

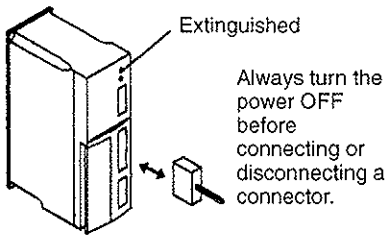

Note that residual voltage still remains in the Servopack even after the power is turned OFF.


Even after the power is turned OFF, residual voltage still remains in the capacitor inside the Servopack. If inspection is to be performed after the power is turned OFF, always wait at least 5 minutes to avoid the risk of an electrical shock.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Always follow the specified installation method.


The Servopack generates heat. Install the Servopack so that it can radiate heat freely. Note also that the Servopack must be in an environment free from condensation, vibration and shock.



Perform noise reduction and grounding properly.

If the signal line is noisy, vibration or malfunction will result.

- Separate high-voltage cables from low-voltage cables.
- Use cables as short as possible.
- Use at least class 3 grounding (ground resistance 100Ω or below) for the Servomotor and Servopack.
- Never use a line filter for the power supply in the motor circuit.



Conduct a voltage resistance test under the following conditions.


- Voltage: 1,500 Vrms AC, one minute
- Braking current: 18 mA
- Frequency: 50/60 Hz
- Voltage applied point: Between R, T terminals and frame ground (connect terminals R and T securely.)



Conduct a dielectric strength test as described on the left.


Use a fast-response type ground-fault interrupter.

For a ground-fault interrupter, always use a fast-response type or one designed for PWM inverters. Do not use a time-delay type.

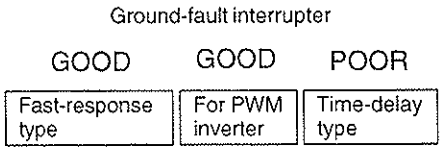


Do not perform continuous operation under overhanging load.

Continuous operation cannot be performed by rotating the motor from the load and applying regenerative braking. Regenerative braking by the Servopack can be applied only for a short period, such as the motor deceleration time.



The Servomotor cannot be operated by turning the power ON and OFF.

Frequently turning the power ON and OFF causes the internal circuit elements to deteriorate. Always start or stop the servomotor by using reference pulses.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

1.2 Installation

This section describes how to check Σ-L Series products on delivery and how to install them.



1.2.1 Checking on Delivery 4
1.2.2 Installing the Servomotor 5
1.2.3 Installing the Servopack 8
1.2.4 Power Loss 10

1.2.1 Checking on Delivery




1) When Σ-L Series products are delivered, check the following items:

Check Items	Remarks
Check if the delivered products are the ones you ordered.	Check the types marked on the nameplates of Servomotor and Servopack (see the table below).
Check if the motor shaft rotates smoothly.	If the motor shaft is smoothly turned by hand, it is normal. However, if the motor has brakes, it cannot be turned manually.
Check for damage.	Check the overall appearance, and check for damage or scratches resulting from transportation.
Check screws for looseness.	Check for looseness by using a screwdriver as necessary.

If any of the above items are faulty or incorrect, contact the dealer from which you purchased the products or your nearest local sales representative.

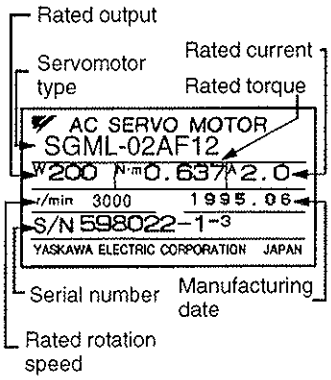	Appearance	Nameplate	Type
Servo motor	 Σ-L Series SGML Servomotor		SGML - 01 A F 1 2 □ Σ-Series SGML: SGML Servomotor Rated Output A3:0.04HP A5:0.07HP 01:0.13HP 02:0.27HP 03:0.40HP 04:0.53HP 08:1.01HP Power supply A:200V B:100V Encoder specifications F: 1024P/R incremental encoder Design revision order Shaft specifications 2: Straight without key 3: Flat key seat 4: Straight with key Option Blank: Standard (W/O brake) B: With brake (90VDC) C: With brake (24VDC)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

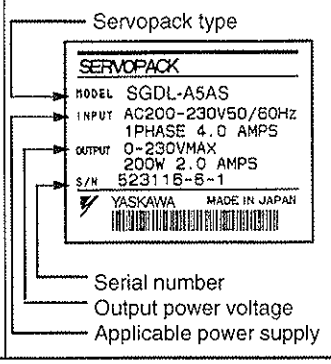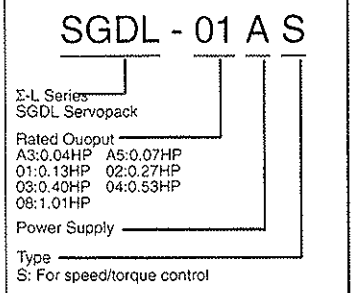
	Appearance	Nameplate	Type
Servo-pack	 Σ-L Series SGDL Servopack		

1.2.2 Installing the Servomotor

Servomotor SGML type can be installed either horizontally or vertically. However, if the Servomotor is installed incorrectly or in an inappropriate location, the service life will be shortened or unexpected problems will occur. To prevent this, always observe the installation instructions described below.

Before installation:

Anticorrosive paint is coated on the edge of the motor shaft. Clean off the anticorrosive paint thoroughly using a cloth moistened with thinner.

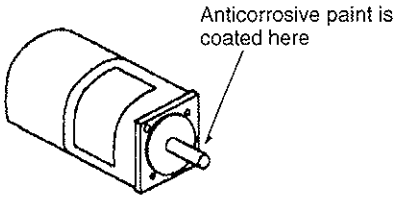

NOTE Avoid getting thinner on other parts of the Servomotor when cleaning the shaft.

Storage:

When the Servomotor is to be stored with the power cable disconnected, store it in the following temperature range:

Between –20°C and 60°C

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Installation sites:


The Servomotor SGML type is designed for indoor use.
Install Servomotor in an environment which meets the following conditions:

- Free from corrosive and explosive gases
- Well-ventilated and free from dust and moisture
- Ambient temperature of 0 to 40°C
- Relative humidity of 20% to 80% (non-condensing)
- Inspection and cleaning can be performed easily

If the Servomotor is used in a location subject to water or oil mist, install a shield cover over the Servomotor.

Alignment:

Align the shaft of the Servomotor with that of the equipment to be controlled, then connect the shafts with couplings. Install the Servomotor so that alignment accuracy falls within the range shown below.




NOTE If the shafts are not aligned properly, vibration will occur, resulting in damage to the bearings.

Mechanical shock to the shaft end must be less than 98m/s^2 (10G) and must be applied no more than twice.
Design the mechanical system so that **thrust load and radial load** applied to the servomotor shaft end during operation falls within the range shown in the following table.


TERMS

Thrust load and radial load

1. Thrust load: Shaft-end load applied parallel to the centerline of a shaft
2. Radial load: Shaft-end load applied perpendicular to the centerline of a shaft



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Motor Type	Allowable Radial Load Fr [N(lb)]	Allowable Thrust Load Fs [N(lb)]	Reference Drawing
SGML-A3	68 (15)	54 (12)	
SGML-A5	68 (15)	54 (12)	
SGML-01	78 (17)	54 (12)	
SGML-02	245 (55)	74 (16)	
SGML-03	245 (55)	74 (16)	
SGML-04	245 (55)	74 (16)	
SGML-08	392 (88)	147 (33)	

Note The radial load and thrust load values shown above are the maximum allowed values for the sum of the load generated by motor torque and the load externally applied to the shaft.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

1.2.3 Installing the Servopack

Σ-L Series SGDL Serrvopack is a book-shaped compact servo controller.
Incorrect installation will cause problems. Always observe the installation instructions described in the next page.


SGDL Servopack

Storage:

When the Servopack is to be stored with the power cable disconnected, store it in the following temperature range:

Between –20°C and 85°C


Installation sites:

Situation	Notes on Installation
When installed in a control panel	Design the control panel size, unit layout, and cooling method so that the temperature around the periphery of the Servopack does not exceed 50°C.
When installed near a heating unit	Suppress radiation heat from the heating unit and a temperature rise caused by convection so that the temperature around the periphery of the Servopack does not exceed 50°C.
When installed near a source of vibration	Install a vibration isolator underneath the Servopack to prevent it from receiving vibration.
When installed in a place receiving corrosive gases	Corrosive gases do not immediately affect the Servopack but will eventually cause contactor-related devices to malfunction. Take appropriate action to prevent corrosive gases.
Others	Avoid installation in a hot and humid place or where excessive dust or iron powder is present in the air.

Orientation:

Install the Servopack perpendicular to the wall as shown in the figure.

The Servopack must be orientated as shown in the figure because it is designed to be cooled by natural convection.



Ventilation

- Firmly secure the Servopack through three mounting holes.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Installation method:

When installing multiple Servopacks side by side in a control panel, observe the following installation method:

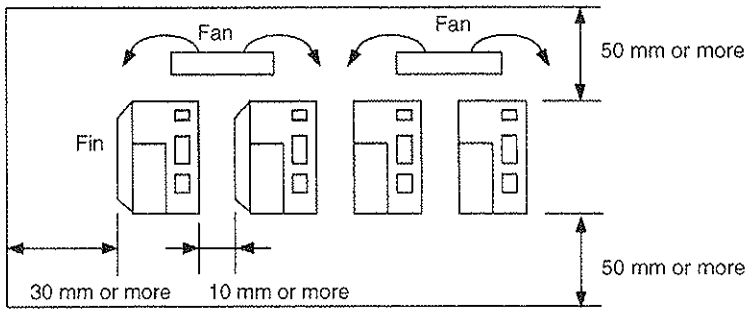

a) Install Servopack perpendicular to the wall so that the front panel (containing connectors) faces outward.

b) Provide sufficient space around each Servopack to allow cooling by natural convection.

c) When installing Servopacks side by side, provide at least 10 mm space between them and at least 50 mm space above and below them as shown in the figure above. Install cooling fans above the Servopacks to prevent the temperature around each Servopack from increasing excessively and also to maintain the temperature inside the control panel evenly.

d) Maintain the following conditions inside the control panel:

- Ambient temperature for Servopack: 0 to 50°C
- Humidity: 90%RH or less
- Vibration: 0.5G (4.9 m/s^2)
- Condensation and freezing: None
- Ambient temperature to ensure long-term reliability: 45°C or less

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

1.2.4 Power Loss

Servopack SGDL-		Output Current (Effective Value) A	Power Loss W
Supply Voltage 200V	A3AS (30W-0.04HP)	0.42	15
	A5AS (50W-0.07HP)	0.6	18
	01AS (100W-0.13HP)	0.87	20
	02AS (200W-0.27HP)	2.0	35
	04AS (400W-0.53HP)	2.6	45
	08AS (750W-1.01HP)	4.4	60
Supply Voltage 100V	A3BS (30W-0.04HP)	0.63	17
	A5BS (50W-0.07HP)	0.9	20
	01BS (100W-0.13HP)	2.2	30
	02BS (200W-0.27HP)	2.7	47
	03BS (300W-0.40HP)	3.7	70

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

1.3 Connection and Wiring

This section describes how to connect Σ-L Series products to peripheral devices and explains a typical example of wiring the main circuit. It also describes an example of connecting to main host controllers.

1.3.1 Connecting to Peripheral Devices 11
1.3.2 Main Circuit Wiring and Power ON Sequence 14
1.3.3 Examples of Connecting I/O Signal Terminals 16

1.3.1 Connecting to Peripheral Devices

1) This section shows a standard example of connecting Σ-L Series products to peripheral devices and briefly explains how to connect to each peripheral device.


2) Before wiring, turn OFF the power switch and post a notice of "No Conduction". Only a qualified electrical technician should perform the wiring.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

1.3.1 Connecting to Peripheral Devices cont.

Standard connection method for Σ-L Series AC Servo Drives:


Molded-case circuit breaker (MCCB)



Used to protect power supply line. Shuts the circuit off when overcurrent is detected.


Noise filter

Used to eliminate external noise from power supply line.



Types: LF-205A (for SGDL-A3AS, A5AS, 01AS, 02AS, A5BS, 01BS)
LF-210 (for SGDL-04AS and 02BS)
LF-220 (for SGDL-03BS and 08AS)

Magnetic contactor




Turns the servo ON or OFF. Use a surge suppressor for the magnetic contactor.

Type: HI-15E5 (30 A)

Brake power supply

Used for Servomotor with brake.



90VDC Specifications


Types:
LPSE-2H01 (for 200 V input)
LPDE-1H01 (for 100 V input)

Regenerative unit

Type: JUSP-RG08


Exterior type regenerative resistor

Type: JUSP-RG08C




Digital

Allows the user to set user constants or operation references and display operation status or alarm status. The following two types are available in addition to personal computers:



Mount type (JUSP-OP03A)
This type can be mounted directly on the Servopack.


Power supply:
Single-phase
200 or 100 V

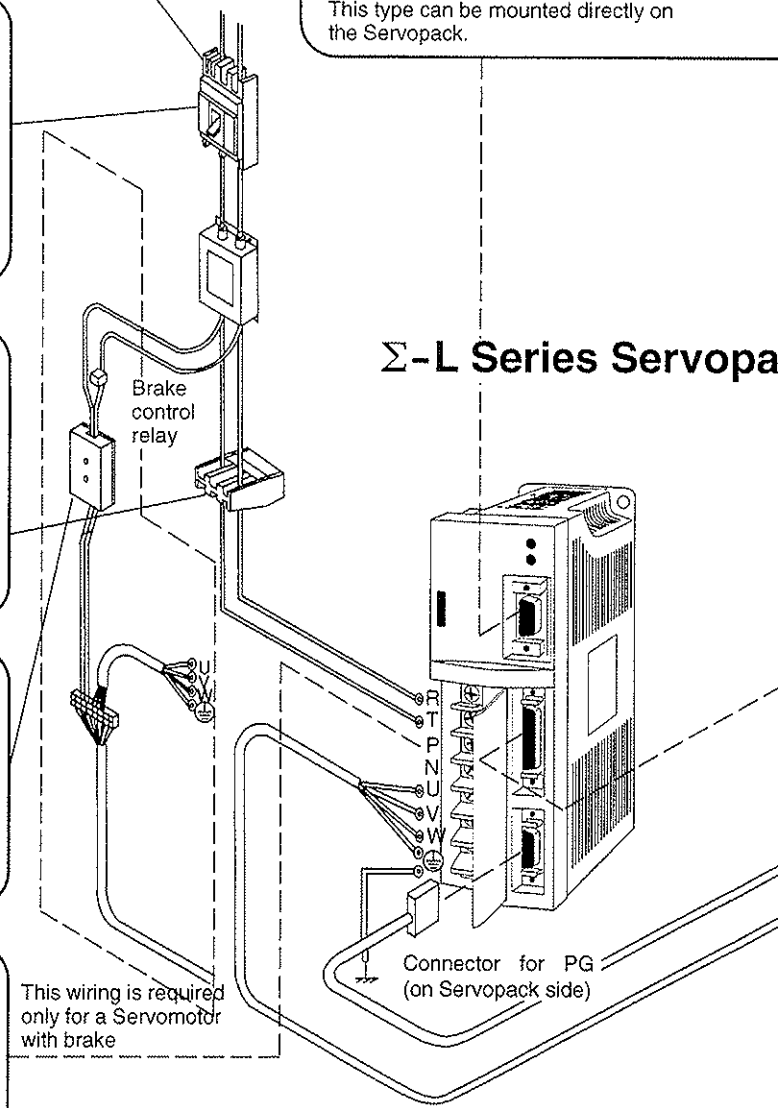

Connector kits for pulse generator (PG) and for motor are not required if the following parts are ordered:
- Cable with terminal connectors
- Cable with connector and amplifier terminal


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

operator



Hand-held type
(JUSP-OP02A-1)
1-meter(3.3ft.) cable included

Personal computer




Exclusive-use cables between personal computer and Servopack (for NEC PC or IBM PC) are available (2m, 6.6ft.).
Type: DE9405258 (for NEC PC, D-sub 25-pin)
DE9408564 (for NEC PC half-pitch connector, 14-pin)
DE9408565 (for IBM PC, IBM compatible PC, D-sub 9-pin)

Host controller

Servopack is compatible with most P.L.C. motion controllers and indexers.

References are input as analog signals.

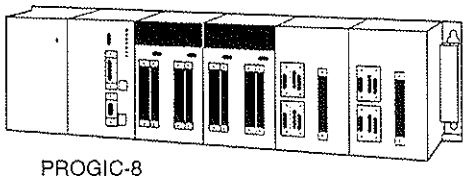


PROGIC-8


Connector terminal block conversion unit

CN1 connector kit (Type: JUSP-TA36P)

(Type: DP9420007)




The terminal block allows connection to a host controller.



1-meter cable with CN1 connector and one end without connector

0.5-meter(1.6ft) cable with two CN1 connectors

(Type: DE9404859)

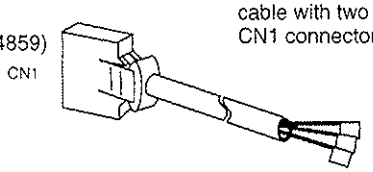

Cable for PG

This cable is used to connect a Servomotor encoder to a Servopack.

Cable for incremental encoder (with connector on both ends)

9.8ft:	DP9320089-1	16.4ft:	DP9320089-2
32.8ft:	DP9320089-3	49.2ft:	DP9320089-4
65.6ft:	DP9320089-5		

A cable with a single connector (without connector on Servopack side) and a cable without connectors are also available.

Connector kit for PG

On Servomotor side




On Servopack side

CN2



This connector kit is required for cables without connectors. For moving parts, a cable for robot must be ordered separately.

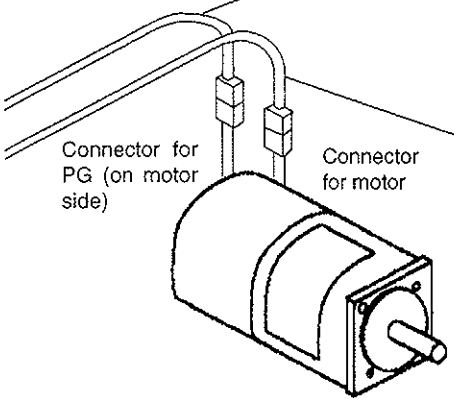

Cable for motor

This is a power cable for connecting a Servomotor to a Servopack.

For a Servomotor with brake, this cable is also used to wire the brake.

Without brake (connector and amplifier terminal included)

9.8ft:	DP9320081-1	16.4ft:	DP9320081-2
32.8ft:	DP9320081-3	49.2ft:	DP9320081-4
65.6ft:	DP9320081-5		

With brake (connector and amplifier terminal included)

9.8ft:	DP9320083-1	16.4ft:	DP9320083-2
32.8ft:	DP9320083-3	49.2ft:	DP9320083-4
65.6ft:	DP9320083-5		

A cable without connector and amplifier terminal is also available.

Connector kit for motor

Connector for motor (on motor side)




This connector kit is required for cables without connector and amplifier terminal.

Σ-L Series Servomotor

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

1.3.2 Main Circuit Wiring and Power ON Sequence

1) The following diagram shows a typical example of wiring the main circuit for Σ-L Series products:

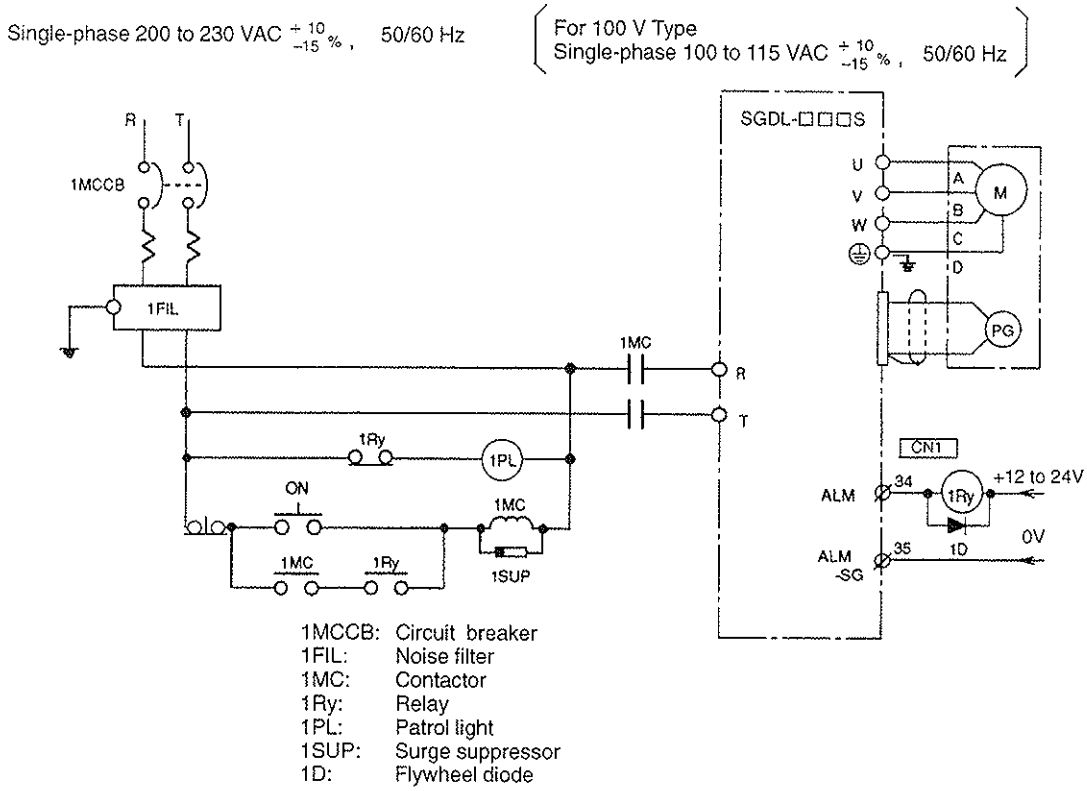

1MCCB: Circuit breaker
1FIL: Noise filter
1MC: Contactor
1Ry: Relay
1PL: Patrol light
1SUP: Surge suppressor
1D: Flywheel diode

2) The following table shows the name and description of each main circuit terminal:

Terminal Symbol	Name	Description
Ⓡ Ⓣ	Main circuit AC input terminal	Single-phase 200 to 230 VAC +10 −15 %, 50/60Hz*
Ⓤ Ⓥ Ⓦ	Motor connection terminal	Connect U to the red motor terminal, V to the white motor terminal, and W to the blue motor terminal
⏚	Ground terminal	Connect to the motor ground terminal (green) for grounding purposes.
Ⓟ Ⓝ	Regenerative unit connection terminal	Connect to a regenerative unit when applicable.


* For 100 V power supply: Single-phase 100 to 115 VAC +10 −15 %, 50/60Hz

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3) Form a power ON sequence as follows:

a) Form a power ON sequence so that the power is turned OFF when a servo alarm signal is output. (See the circuit diagram shown on the previous page.)

b) Hold down the power ON push-button for at least two seconds. The Servopack outputs a servo alarm signal for approximately two seconds or less when the power is turned ON. This operation is required to initialize the Servopack.

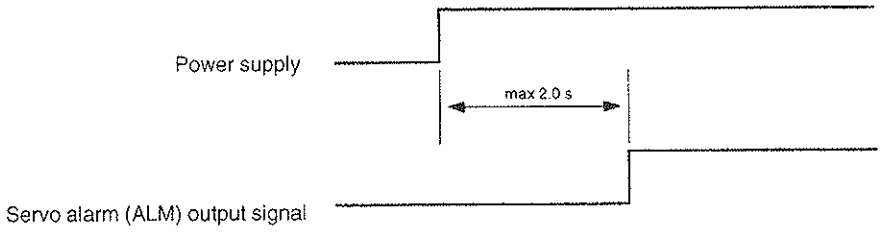

NOTE

- After turning the power OFF, do not touch the power terminals for 5 minutes. High voltage may remain in the Servopack.

- Avoid frequently turning the power ON and OFF. Since the Servopack has a capacitor in the power supply, a high charging current flows (for 0.2 second) when the power is turned ON. Therefore, frequently turning the power ON and OFF causes the main power devices (such as capacitors and fuses) to deteriorate, resulting in unexpected problems.

- If the Servopack is turned ON immediately after being turned OFF, a power loss alarm may arise. To prevent this, always wait for the time shown in the following table before turning the power ON again:

	Single-phase 200 VAC	Single-phase 100 VAC	Power Holding Time
Servopack Type SGDL-	A3AS, A5AS	A3BS	6 seconds
	01AS, 02AS, 04AS	A5BS, 01BS, 02BS	10 seconds
	08AS	03BS	15 seconds


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

1.3.3 Examples of Connecting I/O Signal Terminals

1) This sub-section provides typical examples of connecting to main host controllers. Connection to other host controllers is also possible. Connect to the host controller according to the connection examples shown below by referring to technical documentation for the host controller.

NOTE This sub-section describes signals related to the SGDL Servopack only. For other signals, refer to the relevant technical documentation.

2) Example of Connecting to PROGIC-8

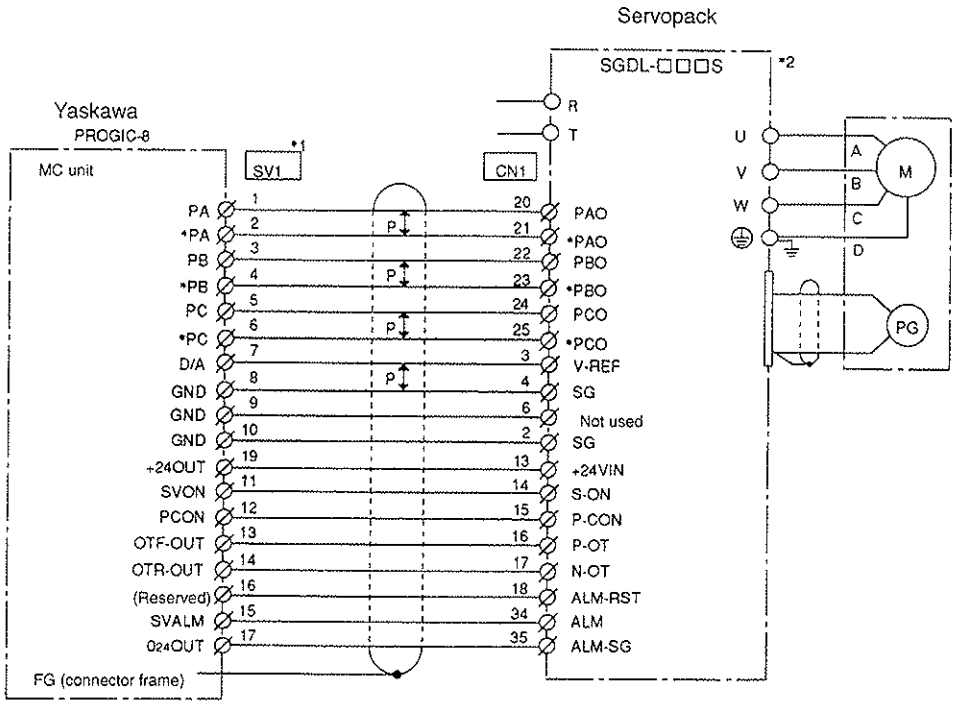


*1 These pin numbers are also applicable to SV2 to SV4.

*2 Do not change the standard settings of user constants for the Servopack.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3) Example of Connecting to GL-Series Positioning Module B2833

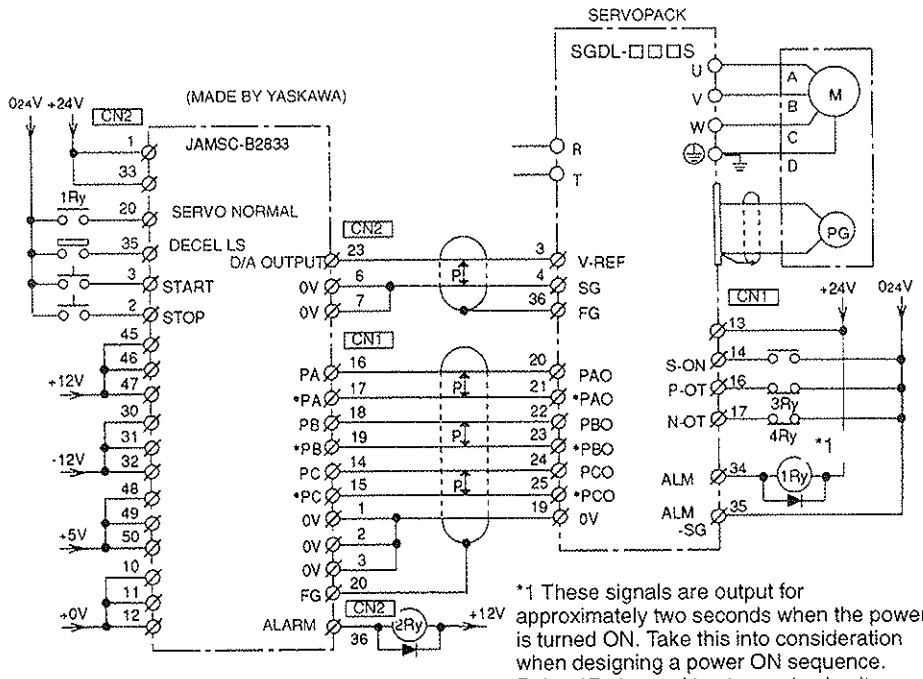


*1 These signals are output for approximately two seconds when the power is turned ON. Take this into consideration when designing a power ON sequence. Relay 1Ry is used to stop main circuit power supply to the Servopack.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

1.3.3 Examples of Connecting I/O Signal Terminals cont.

4) Example of Connecting to OMRON Position Control Unit C500-NC221

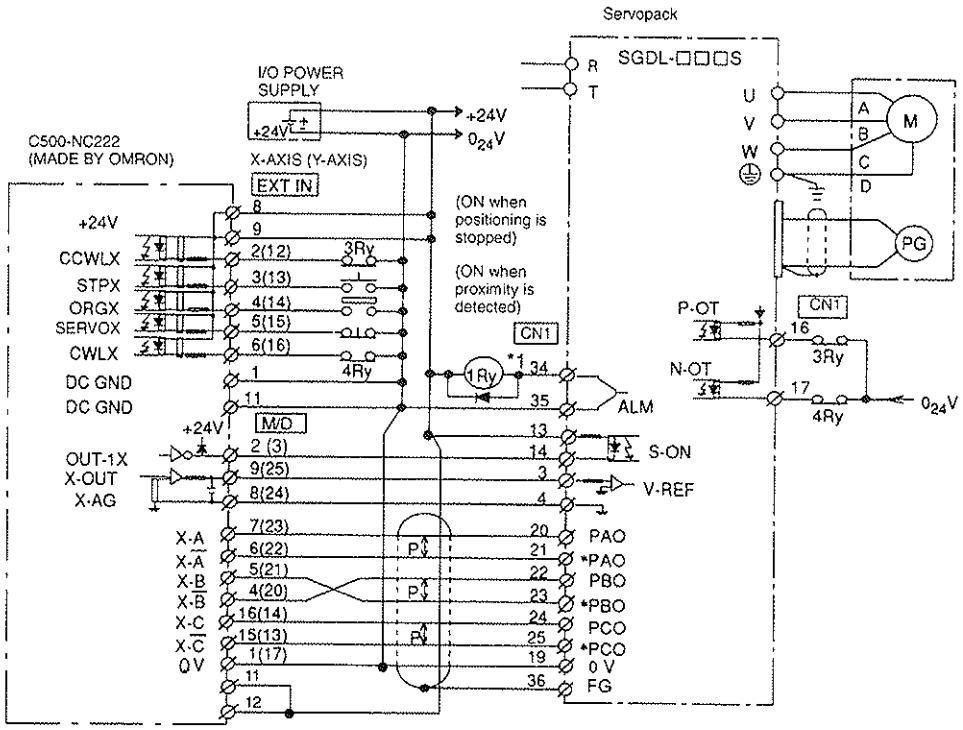


*1 These signals are output for approximately two seconds when the power is turned ON. Take this into consideration when designing a power ON sequence. Relay 1Ry is used to stop main circuit power supply to Servopack.

Note The signals shown here are applicable only to OMRON Sequencer C500-NC221 and Yaskawa Servopack SGDL-□□□S.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

5) Example of Connecting to MITSUBISHI Positioning Unit AD72

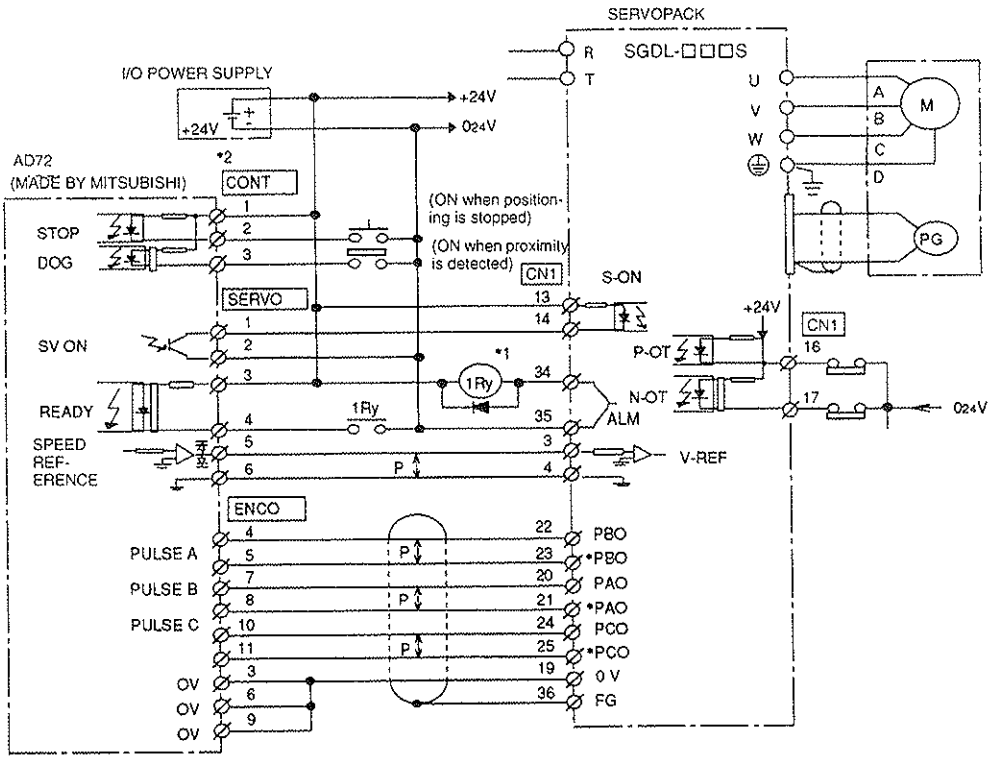

*1 These signals are output for approximately two seconds when the power is turned ON. Take this into consideration when designing a power ON sequence. Relay 1Ry is used to stop main circuit power supply to Servopack.

*2 These pin numbers are the same for both X and Y axes.

Note The signals shown here are applicable only to MITSUBISHI Sequencer AD72 and Yaskawa Servopack SGDL-□□□S.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

1.4 Conducting a Test Run

This section describes how to conduct a full test run. The test run is divided into two steps. Complete a test run in step 1 first, then proceed to step 2.

1.4.1 Test Run in Two Steps 20
1.4.2 Step 1: Conducting a Test Run for Motor without Load 22
1.4.3 Step 2: Conducting a Test Run with the Motor Connected to the Machine 26
1.4.4 Supplementary Information on Test Run 28
1.4.5 Minimum User Constants Required and Input Signals 29

1.4.1 Test Run in Two Steps

Conduct the test run when wiring is complete.

Generally, conducting a test run for servo drives can be difficult. However, by following the two steps described below, the test run can be performed safely and correctly.


NOTE To prevent accidents, initially conduct a test run only for a servomotor under no load (i.e., with all couplings and belts disconnected). Do not run the servomotor while it is connected to a machine.

The test run is divided here into steps 1 and 2.

Complete the test run in step 1 first, then proceed to step 2. The purposes of each step are described on the next page.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Step 1: Conducting a test run for the motor without load .... Check that the motor is wired correctly.




Conduct a test run with the motor shaft disconnected from the machine.

Purpose: To check power supply circuit wiring
To check motor wiring
To check I/O signal (CN1) wiring

Outline: Turn the power ON.
Operate the motor with a digital operator.
Check I/O signals (CN1).
Conduct a test run using I/O signals.

Step 2: Conducting a test run with the motor and machine connected ..... Adjust Servopack according to machine characteristics.

Connect to the machine and conduct a test run.

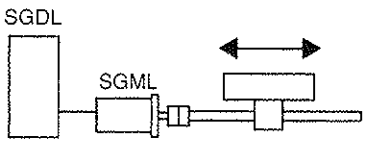

Purpose: To perform autotuning to adjust the motor according to machine characteristics
To match the speed and direction of rotation with the machine specifications
To check the final control mode

Outline: Perform autotuning.
Adjust user constant settings.
Record user constant settings.

End of test run


For customers who use a servomotor with a brake, refer to *Section 1.4.4 Supplementary Information on Test Run* before starting a test run.

The following pages describe the test run procedure in detail.


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

1.4.2 Step 1: Conducting a Test Run for Motor without Load


Check that the motor is wired correctly.
If the motor fails to rotate properly during a servo drive test run, the cause most frequently lies in incorrect wiring.
Conduct a test run for the motor without load according to the procedure described below.
For customers who use a servomotor with brake, refer to *Section 1.4.4 Supplemental Information on Test Run* before starting a test run.

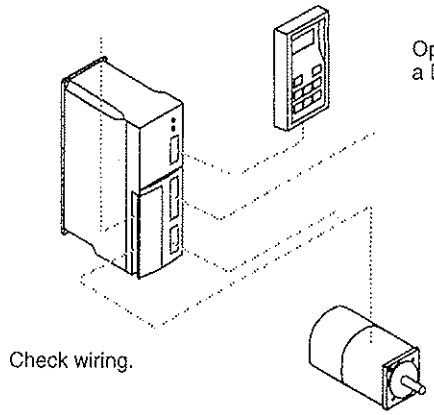


(1) Secure the servomotor.
Secure the servomotor to mounting holes to prevent it from moving during operation. Alternatively, install the servomotor on the machine and disconnect couplings and belts.

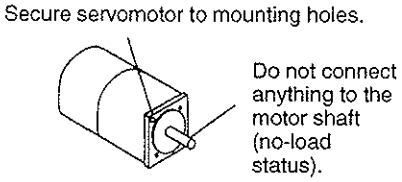

(2) Disconnect connector CN1, then check the motor wiring in the power supply circuit.
I/O signals (CN1) are not to be used so leave connector CN1 disconnected.



(3) Short the alarm signal circuit.
Because connector CN1 is disconnected, the alarm signal prevents the power supply circuit from being turned ON. Therefore, temporarily short the alarm signal circuit.

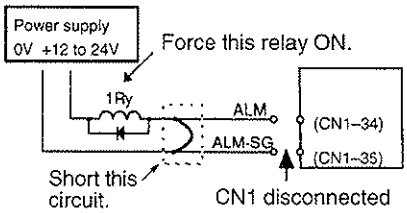

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

(4) Turn the power ON.

Turn the Servopack power ON. If the Servopack is turned ON normally, the LED on the Digital Operator lights up as shown in the figure.


Power is not supplied to the servomotor because the servo is OFF.

Normal display



Alternately displayed

Example of alarm display



Refer to Section *5.2 Troubleshooting*.


If an alarm display appears on the LED as shown in the figure above, the power supply circuit, motor wiring or encoder wiring is incorrect. In this case, turn the power OFF, then correct the problem.

(5) Operate using the Digital Operator

Operate the motor with the Digital Operator. Check that the motor runs normally.

Refer to *3.2.2 Operating Using the Digital Operator.*

Operation by Digital Operator



If an alarm occurs, the power supply circuit, motor wiring, or encoder wiring is incorrect.

(6) Connect signal lines.

Connect connector CN1 as follows:


(1) Turn the power OFF.


(2) Retrun the alarm signal circuit shorted in the above step (3) to its original state.

(3) Connect connector CN1.

(4) Turn the power ON again.

After turning the power OFF, remove the short circuit.

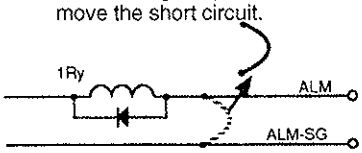




(7) Check input signals.

Check the input signal wiring in monitor mode. For the checking method, refer to *3.1.6 Operation in Monitor Mode.*

Example of Un-05

Internal status bit display (Un-05, Un-06)



S-ON (CN1-14) P-CON (CN1-17) P-OT (CN1-16) N-OT (CN1-17)

The memory switch can be used to eliminate the need for external short-circuits in wiring (see pages 36 and 76).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

• Checking method

Turn each connected signal line ON and OFF to check that the monitor bit display changes accordingly.


Input Signal	ON/OFF	Monitor Bit Display
High level or open	OFF	Extinguished
0 V level	ON	Lit

If the signal lines below are not wired correctly, the motor fails to rotate. Always wire them correctly. (If signal lines are not to be used, short them as necessary.)

P-OT	CN1-16	Motor can rotate in forward direction when this input signal is at 0 V.
N-OT	CN1-17	Motor can reverse when this input signal is at 0 V.
S-ON	CN1-14	Servo is turned ON when this input signal is at 0 V. However, leave the servo in OFF status.

(8) Turn servo (motor) ON.

Turn the servo ON as follows:

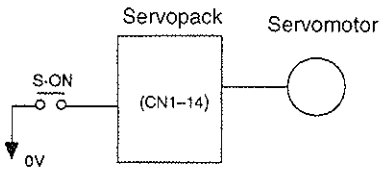

Turn the servo ON

(1) Check that no reference has been input.

PULS (CN1-1) and SIGN (CN1-3) are fixed.

(2) Turn the servo ON signal ON.

Set S-ON (CN1-14) to 0 V. If normal, the motor is turned ON and the Digital Operator displays the data as shown in the figure. If an alarm display appears, take appropriate action as described in *Section 5.2 Troubleshooting.*


Display when servo is turned ON



(9) Operate by reference input.

The operating procedures are as follows:

(1) Gradually increase the speed reference input (V-REF, CN1-3) voltage. The motor will rotate.

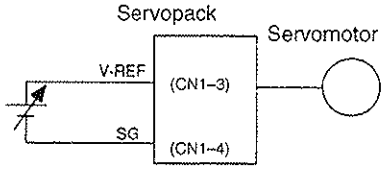

Servomotor rotates at a speed proportional to the reference voltage.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

When a host controller such as a programmable controller performs position control, it may be difficult to directly input the speed reference voltage. In this case, constant voltage reference should be input once to ensure correct operation.

(2) Check the following items in monitor mode (see page 107):

(1) Has a reference speed been input?

(2) Is the motor speed as set?

(3) Does the reference speed match the actual motor speed?

(4) Does the motor stop when no reference is input?

Un-00	Actual motor speed
Un-01	Reference speed

(3) If the motor rotates at an extremely slow speed when 0 V is specified as the reference voltage, correct the reference offset value as described in *Section 3.2.7Speed Reference Offset Automatic Adjustment.*

(4) To change motor speed or the direction of rotation, reset the user constants shown below.

Cn-03	Speed reference gain (see page 46)
Cn-02 bit 0	Reverse rotation mode (see page 34)

If an alarm occurs or the motor fails to rotate during the above operation, connector CN1 wiring is incorrect or the user constant settings do not match the host controller specifications.
In this case, check the wiring and review the user constant settings, then repeat step 1.


Refer to *Appendix C List of User Constants.*

This is all that is required to complete step 1 (conducting a test run for motor without load). Whenever possible, perform tuning associated with the host controller and other necessary adjustments in step 1 (before installing the motor on the machine).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


1.4.3 Step 2: Conducting a Test Run with the Motor Connected to the Machine

After step 1 is complete, proceed to step 2 in which a test run is conducted with the motor connected to the machine. The purpose of step 2 is to adjust the Servopack according to the machine characteristics.
Conduct a test run according to the procedure described below.

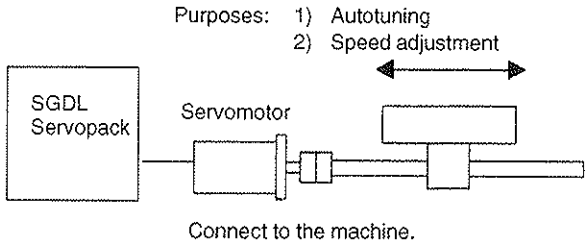


NOTE Before proceeding to step 2, repeat step 1 (conducting a test run for the motor without load) until you are fully satisfied that the test has been completed successfully. Operation faults that arise after the motor is connected to the machine not only damage the machine but may also cause an accident resulting in injury or death. Therefore, all items including user constants setting and wiring should be tested as conclusively as possible before step 1 is complete.


(1) Check that power is OFF.
Turn the Servopack power OFF.



(2) Connect the servomotor to the machine.
Refer to *1.2.2 Installing the Servomotor.*

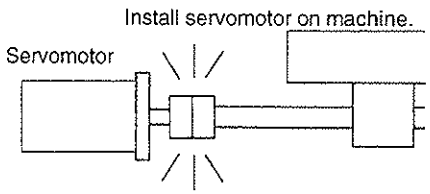


(3) Perform autotuning.
Tune the Servopack according to the mach
characteristics. Refer to *3.2.3 Autotuning.*

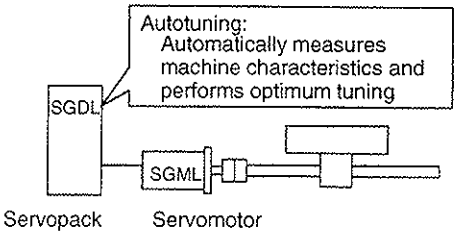


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

(4) Operate by reference input.
As in step 1 (conducting a test run for motor without load), perform (9) *Operate by reference input* on page 24. Perform tuning associated with the host controller.

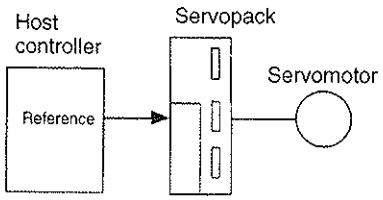

(5) Set user constants and record the settings.
Set user constants as necessary. Record all the user constant settings for maintenance purposes.



This is all that is required to conduct the test run.

Normally, the machine may cause much friction because of an insufficient running-in period. After a test run is complete, perform adequate running-in.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


1.4.4 Supplementary Information on Test Run

When using a servomotor with a brake, always refer to the information described below before starting a test run:

1) When using a servomotor with brake


The brake prevents the motor shaft from rotating due to a backdriving torque. Such a torque may be created by an external force or the force of gravity acting on the load and may result in undesired motion or the load, should motor power be lost.

Servopack uses the brake interlock output (BK) signal to control holding brake operation for a servomotor with brake.

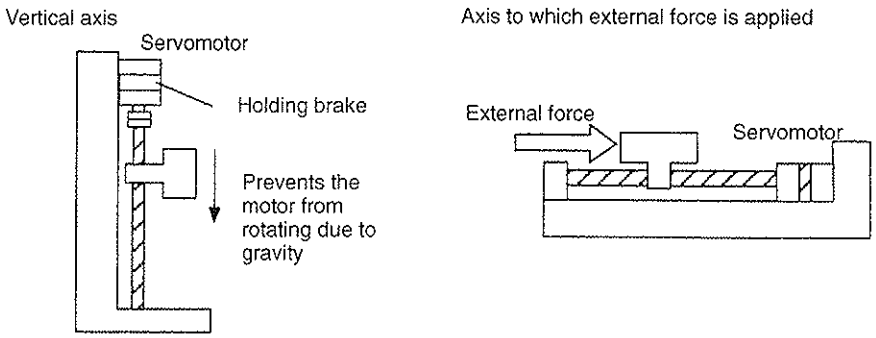

NOTE To prevent faulty operation caused by gravity (or external force), first check that the motor and holding brake operate normally with the motor disconnected from the machine. Then, connect the motor to the machine and conduct a test run.

For wiring of a servomotor with a brake, refer to *2.4.4 Using Holding Brake*.

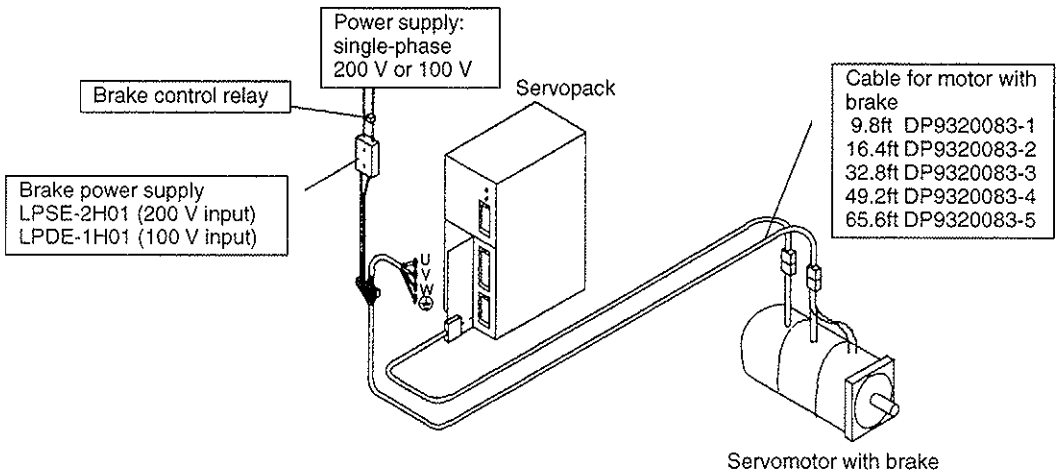

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

1.4.5 Minimum User Constants Required and Input Signals

1) This section describes the minimum user constants that must be set to conduct a test run. For details on how to set each user constant, refer to *3.1.5 Operation in User Constant Setting Mode*.

Cn-03	Speed reference adjustment gain
Cn-0A	Encoder pulse dividing ratio

2) If the specified direction of rotation differs from the actual direction of rotation, the wiring may be incorrect. In this case, recheck the wiring and correct it accordingly. Then, if the direction of rotation is to be reversed, set the following user constant:

Cn-02 (bit 0)	Reverse rotation mode (see page 34)

After changing the Cn-02 setting, always turn the power OFF, then ON. This makes the new setting valid.

3) The following table lists the minimum input signals required to conduct a test run. For details of each input signal, refer to the relevant page.

Signal Name		Pin Number	Function
$\overline{\text{S-ON}}$	(servo ON)	CN1-14	Switching between motor ON and OFF status.The memory switch can be used to eliminate the need for external short-circuit wiring (see page 76).
P-OT	(forward rotation prohibited)	CN1-16	Overtravel limit switch The memory switch can be used to eliminate the need for external short-circuit wiring (see page 36).
N-OT	(revere rotation prohibited)	CN1-17	

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

APPLICATIONS OF Σ-L SERIES PRODUCTS

2

This chapter is prepared for readers who wish to learn more about the applications of Σ-L series products after fully understanding *Chapter 1 Basic Uses of Σ-L series Products*. It explains how to set user constants for each purpose and how to use each function. Read the applicable sections according to your requirements.

2.1 Setting User Constants According to Machine Characteristics 34

2.1.1 Changing the Direction of Motor Rotation 34
2.1.2 Setting the Overtravel Limit Function 35
2.1.3 Restricting Torque 36

2.2 Setting User Constants According to Host Controller 43

2.2.1 Inputting Speed Reference 43
2.2.2 Using Encoder Output 47
2.2.3 Using Contact I/O Signals 49
2.2.4 Using Contact Input Speed Control 51
2.2.5 Using Torque Control 55
2.2.6 Using Torque Restriction by Analog Voltage Reference 61

2.3 Setting Up the Σ-L Servopack 62

2.3.1 Using Autotuning Function 62
2.3.2 Setting Servo Gain 62
2.3.3 Setting the Torque Reference Filter Time Constant 63
2.3.4 Using the Soft Start Function 64
2.3.5 Using Proportional Control 64
2.3.6 Setting the Mode Switch Level 65

2.4 Setting Stop Mode 67

2.4.1 Adjusting Offset 67
2.4.2 Dynamic Brake 68
2.4.3 Using Zero-Clamp 68
2.4.4 Using Holding Brake 70

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2.5 Forming a Protective Sequence 72
2.5.1 Using Servo Alarm Output and Alarm Code Output 72
2.5.2 Using Servo ON Input Signal 75
2.5.3 Using Running Output Signal 76
2.5.4 Handling of Power Failure 78


2.6 Special Wiring 80
2.6.1 Wiring Instructions 80
2.6.2 Wiring for Noise Control 82
2.6.3 Using More Than One Servo Drive 87
2.6.4 Using Regenerative Units 88
2.6.5 Using SGDL Servopack with High Voltage Line 91
2.6.6 Connector Terminal Layouts 93

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Before Reading this Chapter

1) This chapter describes how to use each CN1 connector I/O signal for the SGDL Servopack and how to set the corresponding user constant.


2) For a list of I/O signals of CN1 connecor, refer to *Appendix B List of I/O Signals.*
For terminal arrangement for I/O signals of CN1 connecor, refer to *2.6.6 Connector Terminal Layouts.*

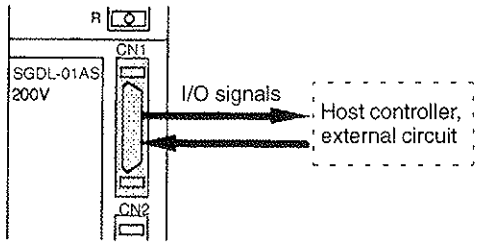

3) For a list of user constants, refer to *Appendix C List of User Constants.*

4) User constants are divided into the following two types.

1) Memory switch Cn-01 and Cn-02	Set each bit to ON or OFF to select a function.
2) Constant setting Cn-03 and later	Set a numerical value such as speed loop gain.

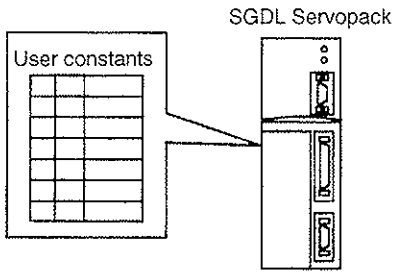

5) For details on how to set user constants, refer to *3.1.5 Operation in User Constant Setting Mode.*

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2.1 Setting User Constants According to Machine Characteristics





This section describes how to set user constants according to the dimensions and performance of the machine to be used.

2.1.1 Changing the Direction of Motor Rotation 34
2.1.2 Setting the Overtravel Limit Function 35
2.1.3 Restricting Torque 36

2.1.1 Changing the Direction of Motor Rotation

1) This Servopack provides a reverse rotation mode in which the direction of rotation can be reversed without altering the servomotor wiring. With the standard setting, forward rotation is defined as counterclockwise (CCW) when viewed from the drive end.

2) If reverse rotation mode is used, the direction of motor rotation can be reversed without other items being changed. The direction (+/–) of axial motion is reversed.

	Standard Setting	Reverse Rotation Mode
Forward Run Reference		
Reverse Run Reference		


3) **Setting Reverse Rotation Mode:**

Set bit 0 of memory switch Cn-02 to select reverse rotation mode.

Cn-02 Bit 0	Rotation Direction Selection	Factory Setting: 0

Set the direction of rotation.

Setting	Meaning	
0	Forward rotation is defined as counterclockwise rotation when viewed from the drive end.	(Standard setting)
1	Forward rotation is defined as clockwise rotation when viewed from the drive end.	(Reverse rotation mode)



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2.1.2 Setting the Overtravel Limit Function


1) The overtravel limit function forces the moving part of the machine to stop when it exceeds the movable range. Use the dynamic brake to force the motor to stop.

2) To use the overtravel limit function, connect the following input signal terminals correctly.

→ Input P-OT CN1-16	Forward Rotation Prohibited (Forward Overtravel)
→ Input N-OT CN1-17	Reverse Rotation Prohibited (Reverse Overtravel)

Inputs terminals for overtravel limit switch.

For linear motion, connect a limit switch to prevent damage to the machine.

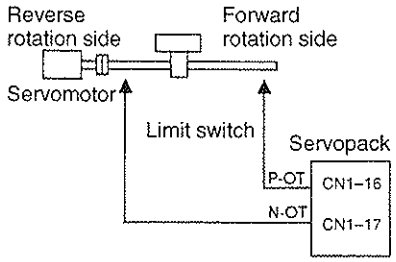


P-OT	ON: CN1-16 is at low level.	Forward rotation allowed. Normal operation status.
	OFF: CN1-16 is at high level.	Forward rotation prohibited (reverse rotation allowed).
N-OT	ON: CN1-17 is at low level.	Reverse rotation allowed. Normal operation status.
	OFF: CN1-17 is at high level.	Reverse rotation prohibited (forward rotation allowed).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3) Use the following user constants (memory switch) to specify whether input signals for overtravel are to be used.

Cn-01 Bit 2	Use of P-OT Input Signal	Factory Setting: 0
Cn-01 Bit 3	Use of N-OT Input Signal	Factory Setting: 0

Specifies whether the P-OT input signal for prohibiting forward rotation at overtravel (CN1-16) is to be used and whether the N-OT input signal for prohibiting reverse rotation at overtravel (CN1-17) is to be used.



The short-circuit wiring shown in the figure can be omitted when P-OT and N-OT are not used.

Specifies "1" when external short-circuit wiring is to be omitted.

Bit	Setting	Meaning
Bit 2	0	Uses the P-OT input signal for prohibiting forward rotation. (Forward rotation is prohibited when CN1-16 is open. Forward rotation is allowed when CN1-16 is at 0 V.)
	1	Does not use the P-OT input signal for prohibiting forward rotation. (Forward rotation is always allowed. This has the same effect as shorting CN1-16 to 0 V.)
Bit 3	0	Uses the N-OT input signal for prohibiting reverse rotation. (Reverse rotation is prohibited when CN1-17 is open. Reverse rotation is allowed when CN1-17 is at 0 V.)
	1	Does not use the N-OT input signal for prohibiting reverse rotation. (Reverse rotation is always allowed. This has the same effect as shorting CN1-17 to 0 V.)

2.1.3 Restricting Torque

1) The Servopack can provide the following torque control:

- **Torque restriction**
  - **Level 1: To restrict the maximum output torque to protect the machine or workpiece**
  - **Level 2: To restrict torque after the motor moves the machine to a specified position**
- Torque control
  - Level 3: To always control output torque, not speed
  - Level 4: To alternately use speed control and torque control

This section describes how to use levels 1 and 2 of the torque restriction function.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2) How to Set Level 1: Internal Torque Limit

The maximum torque is restricted to the values set in the following user constants.

Cn-08	TLMTF Forward Rotation Torque Limit	Unit: %	Setting Range: 0 to Maximum Torque	Factory Setting: Maximum Torque
Cn-09	TLMTR Reverse Rotation Torque Limit	Unit: %	Setting Range: 0 to Maximum Torque	Factory Setting: Maximum Torque

Sets the maximum torque values for forward rotation and reverse rotation, respectively.

Sets these user constants when torque must be restricted according to machine conditions.

This torque restriction function always monitors torque, and outputs the signal shown on the right when the limit value is reached.


Specifies a torque limit value in terms of a percentage of the rated torque.

Output Signal for Torque Restriction Function

- $\overline{\text{TGON}}$ (CN1-9)
- Status indication mode bit data
- Monitor mode (Un-05) bit 4

User Constant Setting:
Memory switch (Cn-01) bit 4 = 1


Example of Use: Machine Protection

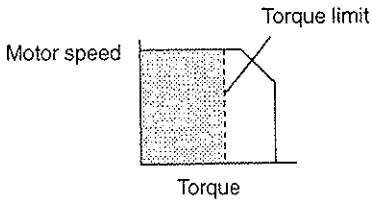

Note that too small a torque limit value will result in torque shortage at acceleration or deceleration.

- Using $\overline{\text{TGON}}$ Signal

This section describes how to use contact output signal $\overline{\text{TGON}}$ as a torque limit output signal.

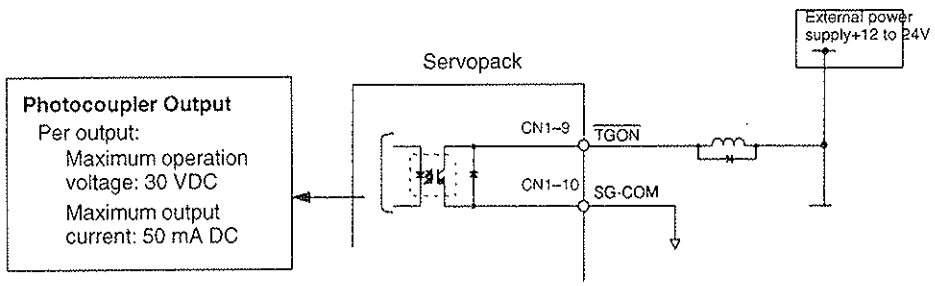

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Output → $\overline{\text{TGON}}$ CN1-9 | Torque Limit Output (Running Output)

This signal indicates whether motor output torque (current) is being restricted.

ON status: The circuit between CN1-9 and CN1-10 is closed. CN1-9 is at low level.	Motor output torque is being restricted. (Internal torque reference is greater than the preset value.)
OFF status: The circuit between CN1-9 and CN1-10 is open. CN1-9 is at high level.	Motor output torque is not being restricted. (Internal torque reference is equal to or below the preset value.)

Preset Value: Cn-08 (TLMTF)
Cn-09 (TLMTR)
Cn-18 (CLMIF) : P-CL input only
Cn-19 (CLMIR) : N-CL input only

Note This function is changed to another function depending on the setting of bit 4 of memory switch Cn-01.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

To use output signal $\overline{\text{TGON}}$ as a torque limit output signal, set the following memory switch to 1.


This memory switch can also be used to set level 2 torque restriction (described in the next subsection).

Cn-01 Bit 4	$\overline{\text{TGON}}$ Output Signal Selection	Factory Setting: 0

Sets the output conditions for output signal $\overline{\text{TGON}}$ (CN1-9).

Setting	Meaning
0	Uses $\overline{\text{TGON}}$ output signal as a running output signal. Compares the motor speed with the Cn-0B (TGONLV) setting. Motor speed ≥ preset value: Closes the circuit between CN1-9 and CN1-10 Motor speed < preset value: Opens the circuit between CN1-9 and CN1-10
1	**Uses $\overline{\text{TGON}}$ output signal as a torque limit output signal.** **Compares the SGDL Servopack internal torque (current) reference with the preset value.** **Preset Value: Cn-08 (TLMTF)** **Cn-09 (TLMTR)** **Cn-18 (CLMIF): P-CL input only** **Cn-19 (CLMIR): N-CL input only** **Internal torque (current) reference ≥ preset value: Opens the circuit between CN1-9 and CN1-10** **Internal torque (current) reference < preset value: Closes the circuit between CN1-9 and CN1-10**

Bit 4 of memory switch Cn-01



When $\overline{\text{TGON}}$ output signal is changed, the following bit data are also changed:


- Status indication mode bit data
- Monitor mode Un-05 bit 4

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3) How to Set Level 2: External Torque Limit

First, use a contact input signal to make the torque (current) limit value set in the user constant valid. Torque limit can be set separately for forward and reverse rotation.

To use this function, always set bit 2 of memory switch Cn-02 to 0 (standard setting). The contact input speed control function cannot be used.

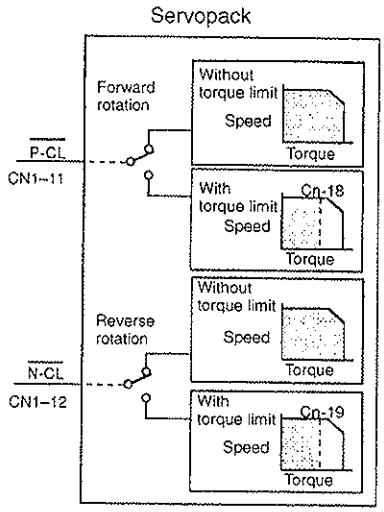

P-CL	ON: CN1-11 is at low level.	Torque restriction applies during forward rotation.	Limit value: Cn-18
	OFF: CN1-11 is at high level.	Torque restriction does not apply during forward rotation.	
N-CL	ON: CN1-12 is at low level.	Torque restriction applies during reverse rotation.	Limit value: Cn-19
	OFF: CN1-12 is at high level.	Torque restriction does not apply during reverse rotation.	

This torque restriction function outputs the signal shown on the right.

Output Signal for Torque Restriction Function

• $\overline{\text{TGON}}$ (CN1-9) • Status indication mode bit data • Monitor mode Un-05 bit 4
User Constant Setting: Memory switch Cn-01 bit 4 = 1

Examples of Use:

- Forced stopping
- Holding workpiece by robot

Sets a torque limit value when torque is restricted by external contact input.

This function is valid when bit 2 of memory switch Cn-02 is set to 0.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Cn-18	CLMIF Forward External Torque Limit	Unit: %	Setting Range: 0 to Maximum Torque	Factory Setting: 100
Cn-19	CLMIR Reverse External Torque Limit	Unit: %	Setting Range: 0 to Maximum Torque	Factory Setting: 100


When $\overline{\text{P-CL}}$ (CN1-11) is input	Applies torque restriction as specified in Cn-18
When $\overline{\text{N-CL}}$ (CN1-12) is input	Applies torque restriction as specified in Cn-19

For torque restriction by analog voltage reference, refer to *2.2.6 Using Torque Restriction by Analog Voltage Reference.*

2

- Using $\overline{\text{P-CL}}$ and $\overline{\text{N-CL}}$ Signals

This section describes how to use input signals $\overline{\text{P-CL}}$ and $\overline{\text{N-CL}}$ as torque limit input signals.

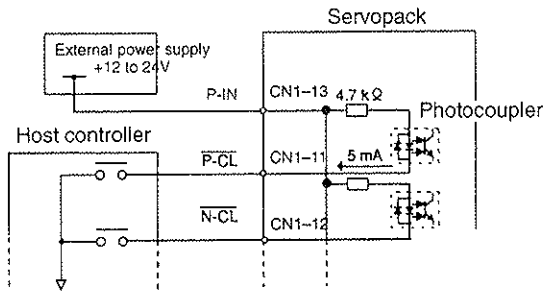

→ Input $\overline{\text{P-CL}}$ CN1-11	Forward External Torque Limit Input (Speed Selection 1)
→ Input $\overline{\text{N-CL}}$ CN1-12	Reverse External Torque Limit Input (Speed Selection 2)

These signals are for forward and reverse external torque (current) limit input.

This function is useful in forced stopping.

Output Signal for Torque Restriction Function

• $\overline{\text{TGON}}$ (CN1-9) • Status indication mode bit data • Monitor mode Un-05 bit 4
• User Constant Setting: Memory switch Cn-01 bit 4 = 1

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

P-CL	ON: CN1-11 is at low level.	Torque restriction applies during forward rotation.	Limit value: Cn-18
	OFF: CN1-11 is at high level.	Torque restriction does not apply during forward rotation. Normal operation status.	
N-CL	ON: CN1-12 is at low level.	Torque restriction applies during reverse rotation.	Limit value: Cn-19
	OFF: CN1-12 is at high level.	Torque restriction does not apply during reverse rotation. Normal operation status.	

The signal shown on the right is output while torque is being restricted.


Note This function is changed to another function depending on the setting of bit 2 of memory switch Cn-02 (see below).

To use input signals $\overline{\text{P-CL}}$ and $\overline{\text{N-CL}}$ as torque limit input signals, set the following memory switch to 0.

Cn-02 Bit 2	Contact Input Speed Control Selection	Factory Setting: 0

Prohibits the contact input speed control function.

If the contact input speed control function is used, the contents of the input signals shown below will change.



After this memory switch is reset, the meanings of the following signals will also change:

Monitor mode (Un-05) bit 7 and bit 8

Setting	Meaning	Input Signal
0	**Does not use the contact input speed control function.**	**$\overline{\text{P-CON}}$ (CN1-15)**: **Used to switch between P control and PI control. (For speed/torque control, bits A and B of Cn-01 take precedence over this signal.)** **$\overline{\text{P-CL}}$ (CN1-11)**: **Used for forward external torque limit input** **$\overline{\text{N-CL}}$ (CN1-12)**: **Used for reverse external torque limit input**
1	Uses the contact input speed control function.	0: OFF, 1: ON

P-CON	P-CL	N-CL	Speed Setting
Direction of rotation 0: Forward 1: Reverse	0	0	Normal speed/torque or position control
	0	1	Cn-1F (SPEED1)
	1	1	Cn-20 (SPEED2)
	1	0	Cn-21 (SPEED3)

- Handling of the $\overline{\text{TGON}}$ signal is the same as for level 1 (internal torque limit). Refer to *Using $\overline{\text{TGON}}$ Signal* on page 37.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


2.2 Setting User Constants According to Host Controller

This section describes how to connect a Σ-L series Servo to a host controller and how to set user constants.

2.2.1 Inputting Speed Reference 43
2.2.2 Using Encoder Output 47
2.2.3 Using Contact I/O Signals 49
2.2.4 Using Contact Input Speed Control 51
2.2.5 Using Torque Control 55
2.2.6 Using Torque Restriction by Analog Voltage Reference 61

2.2.1 Inputting Speed Reference

1) Input a speed reference by using the following input signal "speed reference input." Since this signal can be used in different ways, set the optimum reference input for the system to be created.

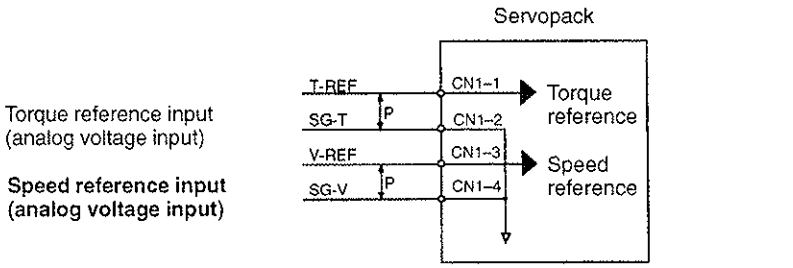


↕P: Represents twisted-pair cables

→ Input V-REF	CN1-3	Speed Reference Input
→ Input SG-V	CN1-4	Signal Ground for Speed Reference Input

Use these signals when speed control is selected (bits A and B of memory switch Cn-01).

For ordinary speed control, always wire the V-REF and SG-V terminals.

Motor speed is controlled in proportion to the input voltage between V-REF and SG-V.

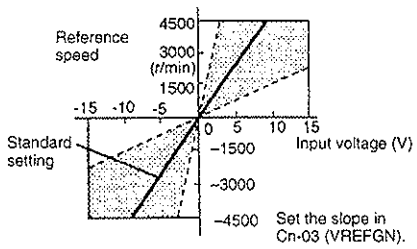

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2.2.1 Inputting Speed Reference cont.


- Standard Setting:

  Cn-03 = 500: This setting means that 6 V is equivalent to rated speed (3,000 r/min)

  Examples:
  +6 V input → 3000 r/min in forward direction
  +1 V input → 500 r/min in forward direction
  –3 V input → 1500 r/min in reverse direction

User constant Cn-03 can be used to change the voltage input range.

- Example of Input Circuit
  (See the figure on the right)

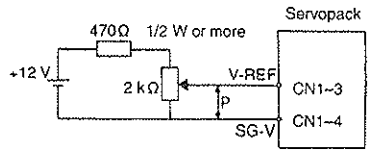


For noise control, always use twisted-pair cables.

Recommended Variable Resistor for Speed Setting:
Type 25HP-10B manufactured by Sakae Tsushin Kogyo Co., Ltd.

When position control is performed by a host controller such as a programmable controller.

Connect V-REF and SG-V to speed reference output terminals on the host controller. In this case, adjust Cn-03 according to output voltage specifications.

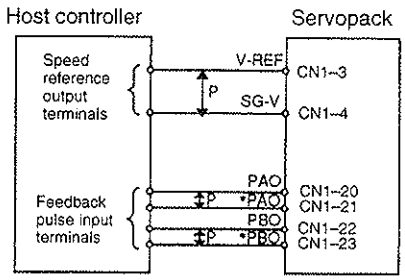



↕P: Represents twisted-pair cables

2) Use the memory switch and input signal $\overline{\text{P-CON}}$ to specify one of the four modes shown below.

Cn-01 Bit A	Control Mode Selection	Factory Setting: 0
Cn-01 Bit B	Control Mode Selection	Factory Setting: 0

The Servopack for speed/torque control (SGDL-□□□S) provides four different control modes.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Cn-01 Setting		Control Mode	
Bit B	Bit A		
0	0	**Speed Control** This is normal speed control. • Speed reference is input from V-REF (CN1-3). • P-CON (CN1-15) signal is used to switch between P control and PI control. CN1-15 is open: PI control CN1-15 is at 0 V: P control • Torque reference input T-REF (CN1-1) cannot be used.	SGDL Servopack 
0	1	**Zero-clamp Speed Control** This speed control allows the zero-clamp function to be set when the motor stops. • Speed reference is input from V-REF (CN1-3). • P-CON (CN1-15) signal is used to turn the zero-clamp function ON or OFF. CN1-15 is open: Turns zero-clamp function OFF CN1-15 is at 0 V: Turns zero-clamp function ON • Torque reference input T-REF (CN1-1) cannot be used.	SGDL Servopack  **Zero-clamp is performed when the following two conditions are met:** **Condition 1: P-CON is turned ON.** **Condition 2: Motor speed drops below the preset value.** **Preset value: Cn-0F (ZCLVL)**
1	0	Torque control I	
1	1	Torque control II	


For torque control, refer to *2.2.5 Using Torque Control.*

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

• Using $\overline{\text{P-CON}}$ Signal:

→ Input $\overline{\text{P-CON}}$ CN1-15	Proportional Control, etc.

The function of input signal $\overline{\text{P-CON}}$ changes with the memory switch setting.

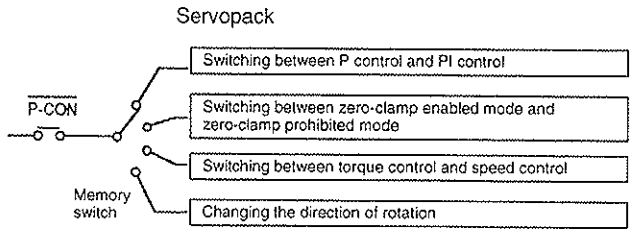


Memory Switch			Meaning of P-CON Signal
Cn-02 Bit 2	Cn-01 Bit B	Cn-01 Bit A	
0	0	0	Switching between proportional (P) control and proportional/integral (PI) control
0	0	1	Switching between zero-clamp enabled/prohibited mode
0	1	0	Not used
0	1	1	Switching between torque control and speed control
1	–	–	Changing the direction of rotation during contact input speed control

3) Adjust the speed reference gain using the following user constant.

Cn-03	VREFGN Speed Reference Gain	Unit: (r/min)/V	Setting Range: 0 to 2162	Factory Setting: 500

Sets the voltage range for speed reference input V-REF (CN1-3). Sets this user constant according to the output form of the host controller or external circuit.



The factory setting is as follows:
Rated speed (3000 r/min)/6 V = 500

TERMS


Zero-clamp function

This function is used for a system in which the host controller does not form a position loop. In this case, the stopping position may shift even if a speed reference is set to 0. If the zero-clamp function is turned ON, a position loop is internally formed so that the stopping position is firmly "clamped."


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2.2.2 Using Encoder Output

1) Encoder output signals **divided** inside the Servopack can be output externally. These signals can be used to form a position control loop in the host controller.

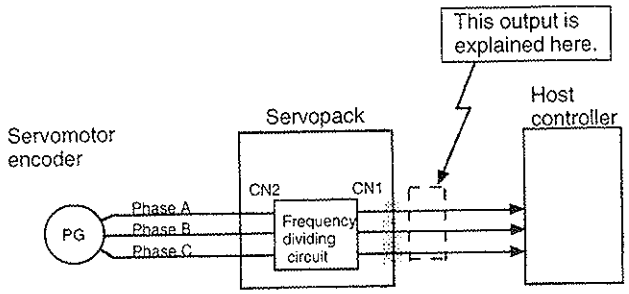

The output circuit is for line driver output. Connect each signal line according to the following circuit diagram.

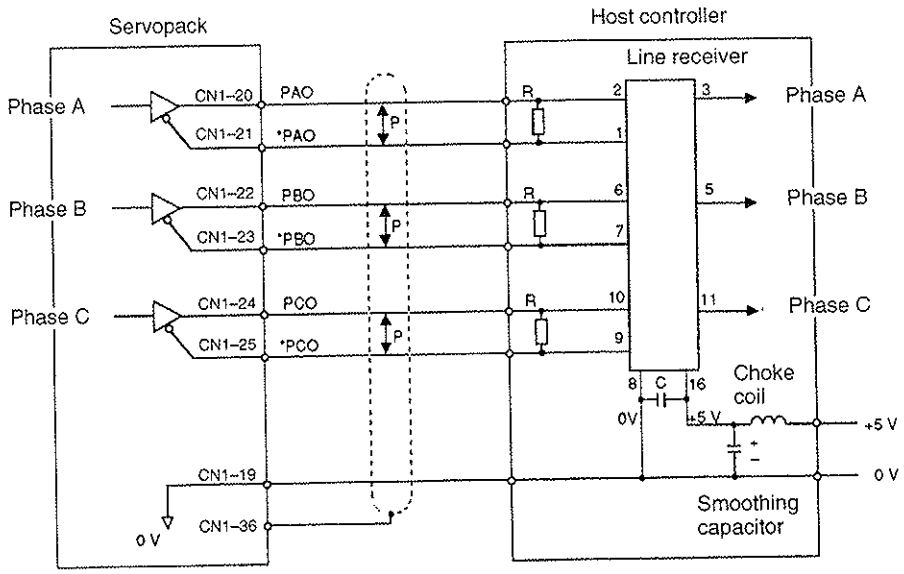

↕P: Represents twisted-pair cables

Line receiver used: SN75175 manufactured by Texas Instruments Inc. or MC3486 (or equivalent)

R (termination resistor): 220 to 470 Ω

C (decoupling capacitor): 0.1 μF

TERMS

Divided (or dividing)

"Dividing" means converting an input pulse train from the encoder mounted on the motor according to the preset pulse density and outputting the converted pulse. The unit is pulses per revolution.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2) I/O signals are described below.

Output → PAO CN1-20	Encoder Output Phase-A
Output → ∗ PAO CN1-21	Encoder Output Phase-A
Output → PBO CN1-22	Encoder Output Phase-B
Output → ∗ PBO CN1-23	Encoder Output Phase-B
Output → PCO CN1-24	Encoder Output Phase-C
Output → ∗ PCO CN1-25	Encoder Output Phase-C


Divided encoder signals are output.

Always connect these signal terminals when a position loop is formed in the host controller to perform position control.

Set a dividing ratio in the following user constant.

Dividing ratio setting	Cn-0A PGRAT

Output Phase Form

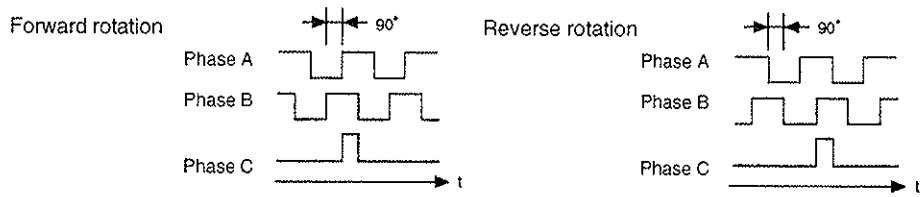

Output → SG CN1-19	Signal Ground for Encoder Output
Output → FG CN1-36	Frame Ground


SG: Connect to 0 V on the host controller.
FG: Connect to the cable shielded wire.

3) Set the pulse dividing ratio in the following user constant.

Cn-0A	PGRAT Encoder Pulse Dividing Ratio Setting	Unit: P/R	Setting Range: 16 to No. of Encoder Pulses	Factory Setting: 1024

Sets the number of output pulses for PG output signals (PAO, ∗PAO, PBO and ∗PBO).


Pulses from motor encoder (PG) are divided by the preset number of pulses before being output.

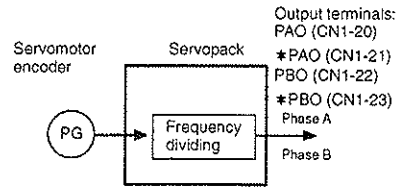

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

The number of output pulses per revolution is set in this user constant. Set this value according to the reference unit of the machine or controller to be used.


Setting example:



2.2.3 Using Contact I/O Signals

1) Contact Input Signal Terminal Connections

These signals are used to control SGDL Servopack operation. Connect these signal terminals as necessary.

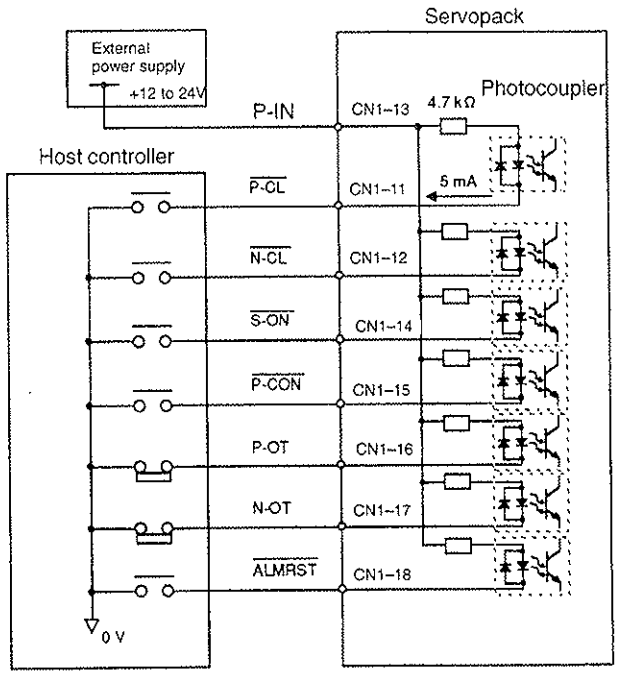

Note Provide an external power supply separately.
There are no power terminals to which the SGDL Servopack outputs signals externally.


External Power Supply: +12 to 24 VDC
50 mA or more

Yaskawa recommends that this external power supply be the same type as for the output circuit.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

→ Input P-IN CN1-13 External Power Supply

This external power supply input terminal is common to the following contact input signals:

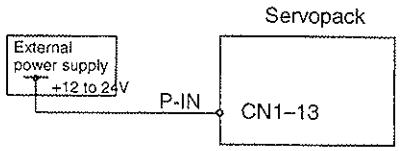


Connect an external power supply.

Contact Input Signals:

$\overline{\text{P-CL}}$	(CN1-11)
$\overline{\text{N-CL}}$	(CN1-12)
$\overline{\text{S-ON}}$	(CN1-14)
$\overline{\text{P-CON}}$	(CN1-15)
P-OT	(CN1-16)
N-OT	(CN1-17)
$\overline{\text{ALMRST}}$	(CN1-18)

2) Contact Output Signal Terminal Connections

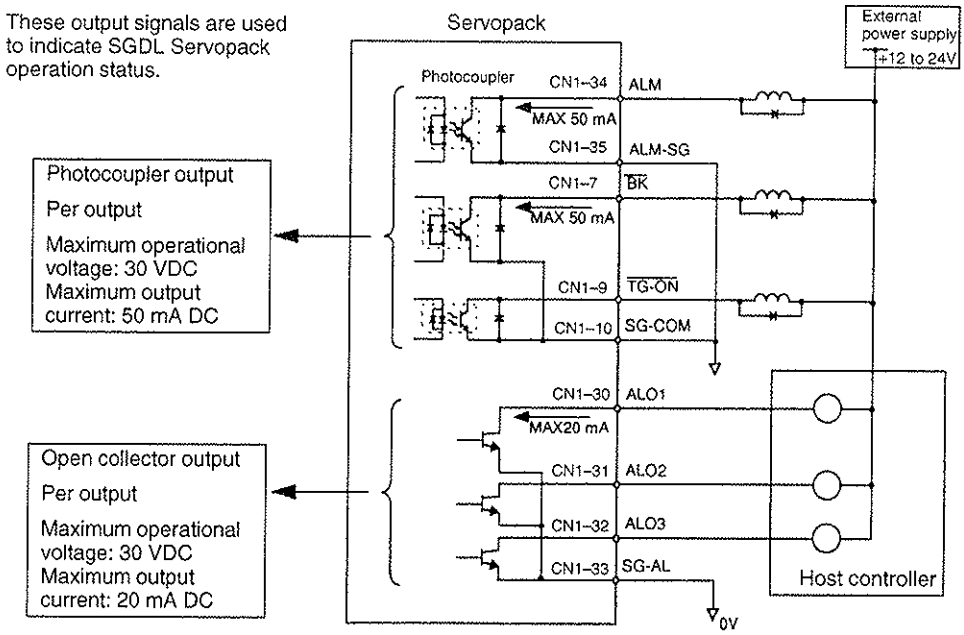

Note Provide an external power supply separately.
There are no power terminals to which the SGDL Servopack outputs signals externally.
Yaskawa recommends that this external power supply be the same type as for the input circuit.

Output → SG-COM CN1-10 Output Signal Ground Common


This signal ground is used for the following output signals. Connect to 0 V on the external power supply.

Contact Output Signals: $\overline{\text{BK}}$ (CN1-7)
$\overline{\text{TGON}}$ (CN1-9)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2.2.4 Using Contact Input Speed Control

1) The contact input speed control function provides easy-to-use speed control. It allows the user to initially set three different motor speeds in user constants, select one of the speeds externally by contact input and run the motor.

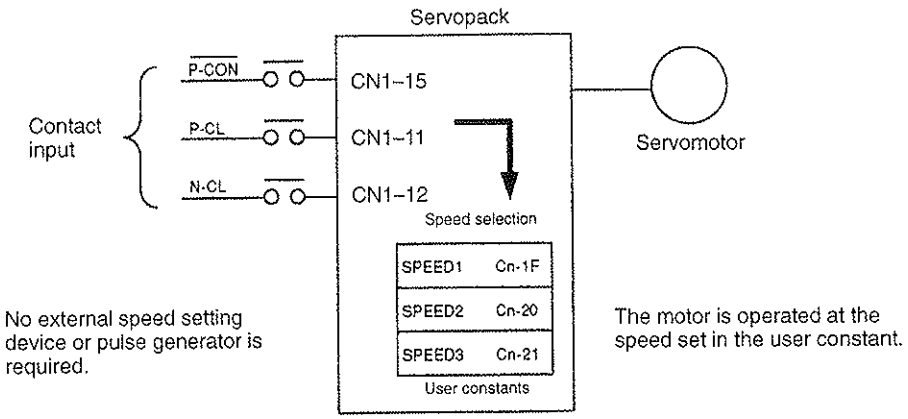


2) To use the contact input speed control function, perform Steps a) to c).

a) Set the following memory switch to **1**.

Cn-02 Bit 2	Contact Input Speed Control Selection	Factory Setting: 0

Enables the contact input speed control function.

If the contact input speed control function is used, the contents of the input signals shown below will change.



When this memory switch is reset, the meanings of the following signals will also change:

Monitor mode (Un-05) bit 7 and bit 8

Setting	Meaning	Input Signal
0	Does not use the contact input speed control function.	P-CON(CN1-15): Used to switch between P control and PI control. P-CL(CN1-11): Used for forward external current limit input N-CL(CN1-12): Used for reverse external current limit input
1	Uses the contact input speed control function.	0: OFF, 1: ON

P-CON	P-CL	N-CL	Speed Setting
Direction of rotation 0: Forward 1: Reverse	0	0	Stop (or pulse reference)
	0	1	Cn-1F, SPEED1
	1	1	Cn-20, SPEED2
	1	0	Cn-21, SPEED3


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

b) Set three motor speeds in the following user constants.

Cn-1F	SPEED1 1st Speed (Contact Input Speed Control)	Unit: r/min	Setting Range: 0 to Maximum Speed	Factory Setting: 100
Cn-20	SPEED2 2nd Speed (Contact Input Speed Control)	Unit: r/min	Setting Range: 0 to Maximum Speed	Factory Setting: 200
Cn-21	SPEED3 3rd Speed (Contact Input Speed Control)	Unit: r/min	Setting Range: 0 to Maximum Speed	Factory Setting: 300

Use these user constants to set motor speeds when the contact input speed control function is used (set bit 2 of memory switch Cn-02).

Speed selection input signals $\overline{\text{P-CL}}$ (CN1-11) and $\overline{\text{N-CL}}$ (CN1-12), and rotation direction selection signal P-CON (CN1-15) enable the motor to run at the preset speeds.




c) Set the soft start time.

Cn-07	SFSACC Soft Start Time (Acceleration)	Unit: ms	Setting Range: 0 to 10000	Factory Setting: 0
Cn-23	SFSDEC Soft Start Time (Deceleration)	Unit: ms	Setting Range: 0 to 10000	Factory Setting: 0

In the Servopack, a speed reference is multiplied by the preset acceleration or deceleration value to provide speed control.

When a progressive speed reference is input or contact input speed control is used, smooth speed control can be performed. (For normal speed control, set "0" in each user constant.)

Set the following value in each user constant.

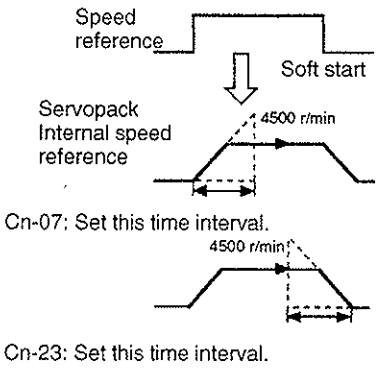

- Cn-07: Time interval from the time the motor starts until it reaches the maximum speed (4500 r/min)
- Cn-23: Time interval from the time the motor is running at the maximum speed until it stops

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3) Contact input speed control performs the following operation.

The following input signals are used to start and stop the motor.

→ Input $\overline{\text{P-CL}}$ CN1-11	Speed Selection 1 (Forward External Torque Limit Input)
→ Input $\overline{\text{N-CL}}$ CN1-12	Speed Selection 2 (Reverse External Torque Limit Input)

a) Contact Input Speed Control when Cn-02 bit 2 = 1

0: OFF, 1: ON

Contact Signal			User Constant			Selected Speed	
P-CON	P-CL	N-CL	Cn-02	Cn-01			
			Bit 2	Bit A	Bit B		
——	0	0	1	0	0	Stop	Stopped by internal speed reference 0
				1	0		Stopped by zero-clamp
				0	1	Analog speed reference (V-REF) input	
				1	1		With zero-clamp function
Direction of rotation 0: Forward 1: Reverse	0	1		——	——	SPEED1 (Cn-1F)	
	1	1				SPEED2 (Cn-20)	
	1	0				SPEED3 (Cn-21)	

Preset values (0 or 1) and input signal status in the portions indicated by horizontal bars (–) are optional.

b) Standard Setting when Cn-02 bit 2 = 0

Input signals are used as external torque limit input.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Input signal $\overline{\text{P-CON}}$ is used to specify the direction of motor rotation.

→ Input $\overline{\text{P-CON}}$ CN1-15	Proportional Control, etc.

a) Contact Input Speed Control when Cn-02 bit 2 = 1

Use input signal $\overline{\text{P-CON}}$ to specify the direction of motor rotation.

$\overline{\text{P-CON}}$	Meaning
1	Reverse rotation
0	Forward rotation

0: OFF (high level), 1: ON (low level)


b) Standard Setting when Cn-02 bit 2 = 0

$\overline{\text{P-CON}}$ signal is used for proportional control, zero-clamp and torque/speed control changeover.

Note For the speed/torque control type, control by external reference (voltage reference) is possible when the contact input speed control function is used by setting bits A and B of user constant Cn-01.

4) The figure below illustrates an example of operation in contact input speed control mode. Using the soft start function reduces physical shock at speed changeover.

When Contact Input Speed Control is Used

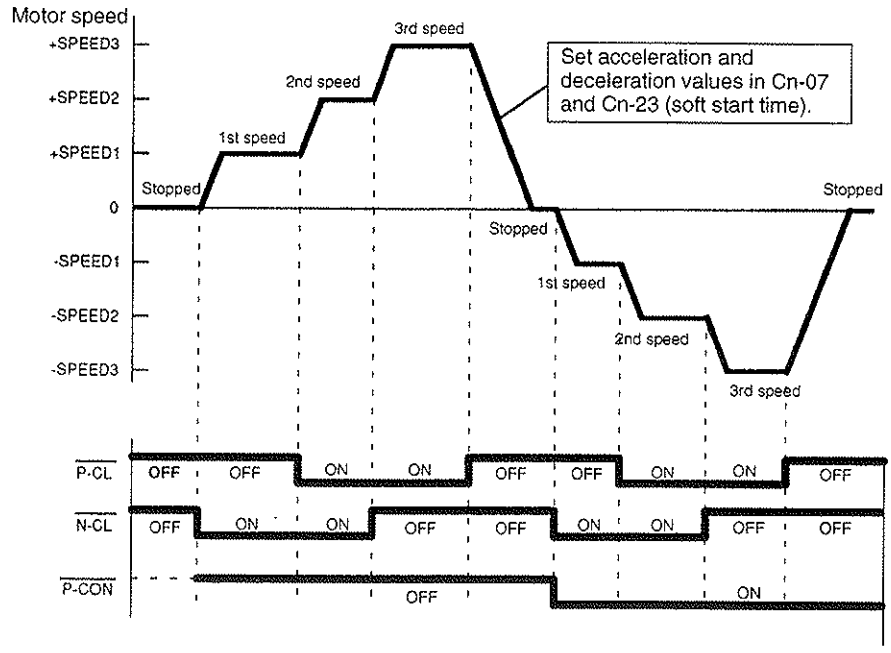

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2.2.5 Using Torque Control

1) The Servopack can provide the following torque control:

- Torque restriction
  - Level 1: To restrict the maximum output torque to protect the machine or workpiece
  - Level 2: To restrict torque after the motor moves the machine to a specified position
- **Torque control**
  - **Level 3: To always control output torque, not speed**
  - **Level 4: To switch between speed control and torque control**

This section describes how to use levels 3 and 4 of the torque control function.

2) Use the following memory switch to select level 3 (torque control I) or level 4 (torque control II).


Cn-01 Bit A	Control Mode Selection	Factory Setting: 0
Cn-01 Bit B	Control Mode Selection	Factory Setting: 0


This is dedicated torque control.

A motor torque reference value is externally input into the Servopack to control torque.



Examples of Use: Tension control
Pressure control

Cn-01 Setting		Control Mode
Bit B	Bit A	
1	0	**Torque Control I** This is a dedicated torque control mode. • A torque reference is input from T-REF (CN1-1). • $\overline{\text{P-CON}}$ is not used. • Speed reference input V-REF (CN1-3) cannot be used. • User constant Cn-14 can be used for maximum speed control. Example of Use: Tension control



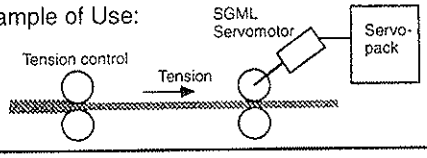


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Cn-01 Setting		Control Mode
Bit B	Bit A	
1	1	**Torque Control II** Torque control and speed control can be switched. • A speed reference or speed limit value is input from V-REF (CN1-3). • T-REF (CN1-1) inputs a toque reference, torque feed-forward reference or torque limit value depending on the control mode used. • $\overline{\text{P-CON}}$ (CN1-15) is used to switch between torque control and speed control. When CN1-15 is open: Torque control When CN1-15 is at 0 V: Speed control 
1	1	For Torque Control when $\overline{\text{P-CON}}$ is OFF: • T-REF reference controls torque. • V-REF can be used to limit motor speed. • V-REF voltage (+) limits motor speed during forward or reverse rotation. **Principle of Speed Restriction:** **When the speed exceeds the speed limit, negative feedback of torque proportional to the difference between the current speed and the limit speed is performed to return the speed to within the normal speed range. Therefore, the actual motor speed limit value has a certain range depending on the load conditions.** 

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

<table>
<tr><th colspan="2">Cn-01 Setting</th><th rowspan="2">Control Mode</th></tr>
<tr><th>Bit B</th><th>Bit A</th></tr>
<tr><td>1</td><td>1</td><td>For Speed Control when $\overline{\text{P-CON}}$ is ON:
Values set in bit F of user constant Cn-01 and bit F of Cn-02 determine the following:
<table>
<tr><th colspan="2">User Constant</th><th rowspan="2">Speed Reference Input</th><th rowspan="2">Torque Input</th><th rowspan="2">Remarks</th></tr>
<tr><th>Cn-01 Bit F</th><th>Cn-02 Bit F</th></tr>
<tr><td rowspan="2">0</td><td rowspan="2">0</td><td colspan="2">Speed control</td><td rowspan="2"></td></tr>
<tr><td>Speed reference</td><td>Cannot be used</td></tr>
<tr><td rowspan="2">1</td><td rowspan="2">——</td><td colspan="2">Speed control with torque feed-forward</td><td rowspan="2"></td></tr>
<tr><td>Speed reference</td><td>Torque feed-forward</td></tr>
<tr><td rowspan="2">0</td><td rowspan="2">1</td><td colspan="2">Speed control with torque limit by analog voltage reference</td><td rowspan="2">For details of speed control with torque limit by analog voltage reference, refer to 2.2.6 Using Torque Restriction by Analog Voltage Reference.</td></tr>
<tr><td>Speed reference</td><td>Torque limit value</td></tr>
</table></td></tr>
<tr><td>0</td><td>0</td><td>Speed control</td><td>(Standard setting)</td></tr>
<tr><td>0</td><td>1</td><td colspan="2">Zero-clamp speed control</td></tr>
</table>

3) The following input signals perform torque control.

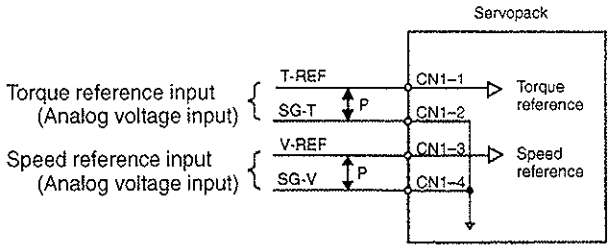


↕P: Represents twisted-pair cables

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

→ Input T-REF CN1-1	Torque Reference Input
→ Input SG-T CN1-2	Signal Ground for Torque Reference Input

These signals are used when torque control is selected (bits A and B of memory switch Cn-01).

Motor torque is controlled so that it is proportional to the input voltage between T-REF and SG-T.

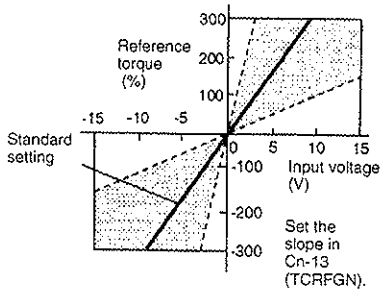


Standard Setting

Cn-13 = 30: This setting means that 3 V is equivalent to rated torque.

Examples: +3 V input → Rated torque in forward direction
+9 V input → 300% of rated torque in forward direction
–0.3 V input → 10% of rated torque in reverse direction

User constant Cn-13 can be used to change the voltage input range.

Example of Input Circuit:
See the figure on the right.

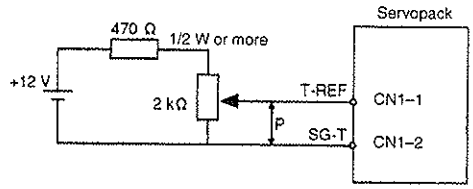

- For noise control, always use twisted-pair cables.


- Example of Variable Resistor for Speed Setting:
  Type 25HP-10B manufactured by Sakae Tsushin Kogyo Co., Ltd.

→ Input V-REF CN1-3	Speed Reference Input (or Speed Limit Input)
→ Input SG-V CN1-4	Signal Ground for Speed Reference Input

These signals are used when speed control is selected (bits A and B of memory switch Cn-01).

For normal speed control, always connect these signal terminals.

Motor speed is controlled so that it is proportional to the input voltage between V-REF and SG-V.



Standard Setting


Cn-03 = 500: This setting means that 6 V is equivalent to rated speed (3000 r/min).

Examples: +6 V input → 3000 r/min in forward direction
+1 V input → 500 r/min in forward direction
–3 V input → 1500 r/min in reverse direction

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

User constant Cn-03 can be used to change the voltage input range. (This is also applicable to speed restriction.)

Example of Input Circuit:
See the figure on the right.

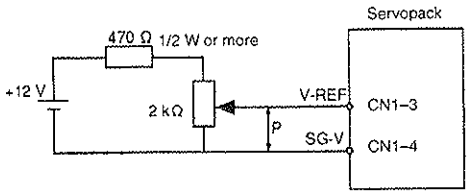


- For noise control, always use twisted-pair cables.

- Example of Variable Resistor for Speed Setting:
  Type 25HP-10B manufactured by Sakae Tsushin Kogyo Co., Ltd.

When input signal $\overline{\text{P-CON}}$ is used to switch between speed reference and torque reference for torque control II, set both bits A and B of memory switch Cn-01 to 1.

→ Input $\overline{\text{P-CON}}$ CN1-15 Proportional Control, etc.

The function of this input signal varies according to the memory switch setting.

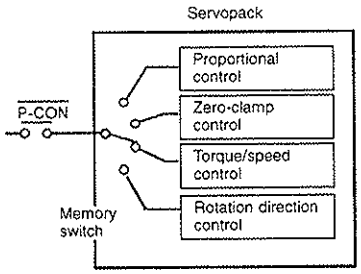

The function of $\overline{\text{P-CON}}$ signal varies according to the memory switch setting.

Cn-02 Bit 2	Cn-01 Bit B	Cn-01 Bit A	Function of $\overline{\text{P-CON}}$
0	0	0	Proportional control (Standard setting)
0	0	1	Zero-clamp control
0	1	0	Not used
0	**1**	**1**	**Torque/speed changeover control**
1	—	—	Rotation direction control for contact input speed control

- **Torque/Speed Changeover Control**
  This function is used to switch between torque control and speed control in torque control II mode.


ON: CN1-15 is at low level.	Speed control
OFF: CN1-15 is at high level.	Torque control

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4) Set the following user constants for torque control according to the servo system used.

Cn-13	TCRFGN Torque Reference Gain	Unit: 0.1 V/Rated Torque	Setting Range: 10 to 100	Factory Setting: 30

Sets the voltage range of torque reference input T-REF (CN1-1) according to the output form of the host controller or external circuit.

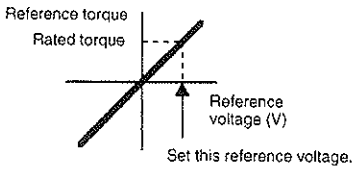


The factory setting is 30, so the rated torque is 3 V (30 x 0.1).

Cn-14	TCRLMT Speed Limit for Torque Control I	Unit: r/min	Setting Range: 0 to Maximum Speed	Factory Setting: Maximum Speed

Sets a motor speed limit value in this constant when torque control I is selected.


This user constant is used to prevent machine overspeed during torque control.



For torque control I, set bits A and B of memory switch Cn-01.

Cn-03	VREFGN Speed Reference Gain	Unit: (r/min)/V	Setting Range: 0 to 2162	Factory Setting: 500

Sets the voltage range of speed reference input V-REF (CN1-3) according to the output form of the host controller or external circuit.



The factory setting is 500 [rated speed (3000 r/min)/6 V = 500].


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2.2.6 Using Torque Restriction by Analog Voltage Reference

1) Outline

This function restricts torque by assigning the T-REF terminal (CN1-3, CN1-4) a torque limit value in terms of analog voltage. Since torque reference input terminal T-REF is used as an input terminal, this function cannot be used for torque control.

Schematic Block Diagram for Torque Restriction by Analog Voltage Reference

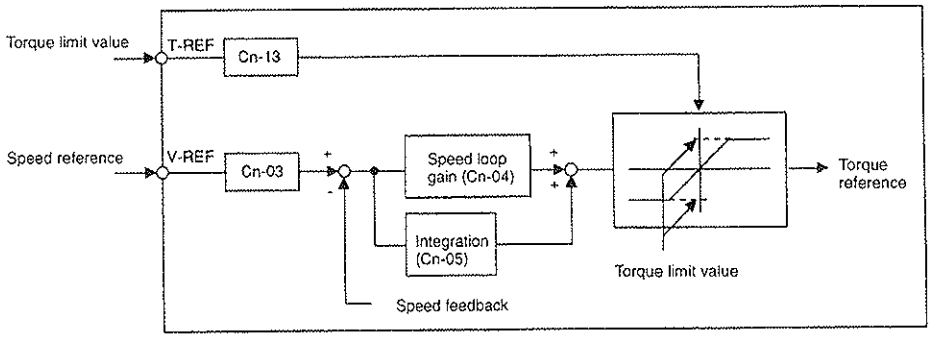

2) How to Use Torque Restriction by Analog Voltage Reference

To use this torque restriction function, set the following memory switch to 1.

Cn-02 Bit F	Torque Restriction by Analog Voltage Reference	Factory Setting: 0

Enables this torque restriction function.

To use this function, input a speed reference to the V-REF terminal and a torque limit value to the T-REF terminal.

This function cannot be used for torque control.

Torque restriction cannot be set separately for forward and reverse rotation. (The same setting applies to both forward and reverse rotation.)

Setting	Meaning
0	Uses the T-REF terminal as a torque reference
1	**Uses the T-REF terminal as a torque limit value input terminal.**

3) Setting a Torque Limit Value in User Constant Cn-13

The factory setting is Cn-13 = 30. If, for example, the torque limit value is 3 V, torque is restricted to 100% (rated torque). A torque value in excess of 100% is clamped at 100%.

Cn-13	TCRFGN Torque Reference Gain	Unit: 0.1 V/ Rated Torque	Setting Range: 10 to 100	Factory Setting: 30

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2.3 Setting Up the Σ-L Servopack

This section describes how to set user constants to operate the SGDL Servopack.

2.3.1 Using Autotuning Function 62
2.3.2 Setting Servo Gain 62
2.3.3 Setting the Torque Reference Filter Time Constant 63
2.3.4 Using the Soft Start Function 64
2.3.5 Using Proportional Control 64
2.3.6 Setting the Mode Switch Level 65

2.3.1 Using Autotuning Function

1) If speed loop gain and position loop gain for the servo system are not set properly, positioning may become slow. Techniques and experience are required to set these servo gain values according to machine configuration and machine rigidity.

2) Σ-series Servopacks have an autotuning function that automatically measures machine characteristics and sets the necessary servo gain values. With this function, even first-time servo users can easily perform tuning for servo gain. Servo gain values are set in user constants.

3) The following user constants can be automatically set by the autotuning function.

User Constant	Meaning
Cn-04	Speed loop gain
Cn-05	Speed loop integration time constant

4) For details of how to perform autotuning, refer to *3.2.3 Autotuning*

2.3.2 Setting Servo Gain

1) Check and reset the servo gain when:

a) Automatically set servo gain values need to be checked after autotuning.

b) Each servo gain value checked in a) is to be directly set for another Servopack.


c) Response performance needs to be further enhanced after autotuning, or servo gain values need to be reset for a system with lower response performance.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2) Set the following user constants related to speed loop as necessary.

Cn-04	LOOPHZ Speed Loop Gain (Kv)	Unit: Hz	Setting Range: 1 to 2000	Factory Setting: 80
Cn-05	PITIME Speed Loop Integration Time Constant (Ti)	Unit: ms	Setting Range: 2 to 10000	Factory Setting: 20


Cn-04 and Cn-05 are a speed loop gain and an integration time constant for the Servopack, respectively.



The higher the speed loop gain value or the smaller the speed loop integration time constant value, the higher the speed control response. There is, however, a certain limit depending on machine characteristics.

Factory setting of speed loop gain is PI control as shown above. P control and PI control can be switched by P-CON (CN1-15).

P-CON is OFF	PI Control
P-CON is ON	P Control



These user constants are automatically set by the autotuning function.

2.3.3 Setting the Torque Reference Filter Time Constant

1) If the machine causes vibration, possibly resulting from the servo drive, adjust the following filter time constant. Vibration may stop.

Cn-17	TRQFIL Torque Reference Filter Time Constant	Unit: 100 µs	Setting Range: 0 to 250	Factory Setting: 4

Cn-17 is a torque reference filter time constant for the SGDL Servopack. The smaller the value, the higher the torque control response. There is, however, a certain limit depending on machine conditions.

With the standard setting, the machine may cause vibration resulting from the servo drive. In this case, increase the constant setting. Vibration may stop. Vibration can be caused by incorrect gain adjustment, machine problems and so on.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2.3.4 Using the Soft Start Function


1) The soft start function adjusts progressive speed reference input inside the Servopack so that acceleration and deceleration can be as constant as possible. To use this function, set the following user constants.

Cn-07	SFSACC Soft Start Time (Acceleration)	Unit: ms	Setting Range: 0 to 10000	Factory Setting: 0
Cn-23	SFSDEC Soft Start Time (Deceleration)	Unit: ms	Setting Range: 0 to 10000	Factory Setting: 0

In the Servopack, a speed reference is multiplied by the acceleration or deceleration value set in Cn-07 or Cn-23 to provide speed control.

Smooth speed control can be achieved when progressive speed references are input or when contact input speed control is used.

Set these user constants as follows.

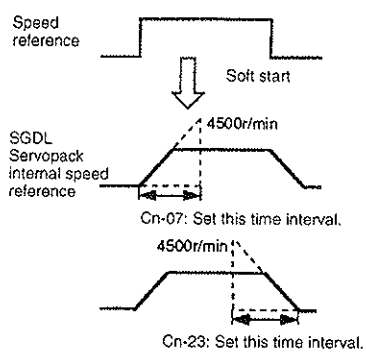

Cn-07: Time interval from the time the motor starts until the maximum speed (4500 r/min) is reached

Cn-23: Time interval from the time the motor is running at the maximum speed (4500 r/min) until it stops

2.3.5 Using Proportional Control

1) If both bits A and B of memory switch Cn-01 are set to 0 as shown below, input signal $\overline{\text{P-CON}}$ serves as a PI/P control changeover switch.


- PI Control: Proportional/Integral control
- P Control: Proportional control

Cn-01 Bit A	Control Mode Selection	Factory Setting: 0
Cn-01Bit B	Control Mode Selection	Factory Setting: 0

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

For speed/torque control (SGDL-□□□S) only.

<table>
<tr><th colspan="2">Cn-01 Setting</th><th rowspan="2">Control Mode</th></tr>
<tr><th>Bit B</th><th>Bit A</th></tr>
<tr><td>0</td><td>0</td><td>
Speed Control
This is normal speed control.
• Speed reference is input from V-REF (CN1-3).
• Signal P-CON (CN1-15) is used to switch between P control and PI control.
<table>
<tr><td>P-CON (CN1-15) is open (OFF)</td><td>PI control</td></tr>
<tr><td>P-CON (CN1-15) is closed (ON)</td><td>P control</td></tr>
</table>
• Torque reference input T-REF (CN1-1) cannot be used.
</td></tr>
</table>




2) Proportional control can be used in the following two ways.

a) When operation is performed by sending speed references from the host controller to the Servopack, the host controller can selectively use P control mode for particular conditions only. This method can prevent the occurrence of overshoot and also shorten settling time.

b) If PI control mode is used when the speed reference has a reference offset, the motor may rotate at a very slow speed and fail to stop even if 0 is specified as a speed reference. In this case, use P control mode to stop the motor.

2.3.6 Setting the Mode Switch Level

1) Use the mode switch to prevent overshoot during acceleration or deceleration.

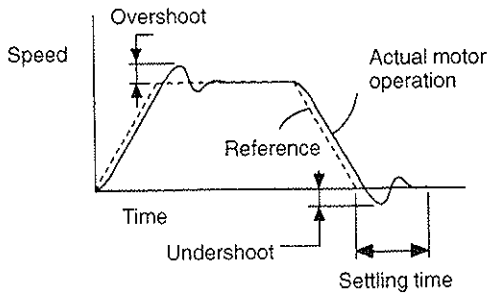


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2) In other words, the mode switch is a function that automatically switches the speed control mode inside the Servopack **from PI control to P control** while certain conditions are being established.


NOTE The mode switch is used to fully utilize performance of a servo drive to achieve very high-speed positioning. The speed response waveform must be observed to adjust the mode switch.
For normal use, the speed loop gain set by autotuning provide sufficient speed/position control.
Even if overshoot or undershoot occurs, they can be suppressed by setting the acceleration/deceleration time constant for the host controller, the soft start time constants (Cn-07, Cn-23), or smoothing time constant (Cn-26) for the Servopack.

SGDL Servopack uses touque reference as a detection point of mode switch.

If a torque reference exceeds the torque value set in user constant Cn-0C, the speed loop switches to P control.

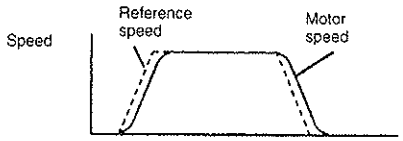


Factory setting of mode switch level is 200% torque (Cn-0C).

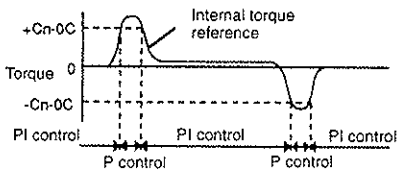

Example of Operation:

If a mode switch is not used and PI control is always performed, torque may enter a saturation state during acceleration or deceleration, causing the motor speed to have overshoot or undershoot.
Using the mode switch suppresses torque saturation and prevents the motor speed from having overshoot and undershoot.

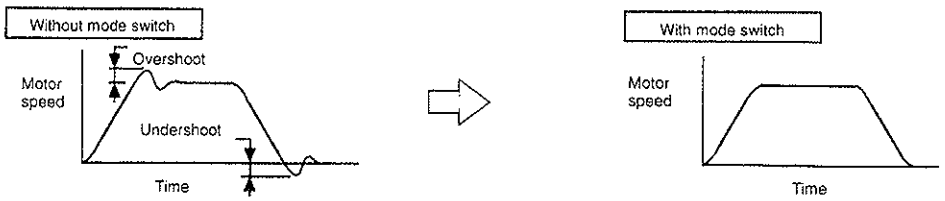

TERMS

From PI control to P control

PI control means proportional/integral control and P control means proportional control. In short, switching "from PI control to P control" reduces effective servo gain, making the servo system more stable.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2.4 Setting Stop Mode

This section describes how to stop the motor properly.


2.4.1 Adjusting Offset 67
2.4.2 Dynamic Brake 68
2.4.3 Using Zero-Clamp 68
2.4.4 Using Holding Brake 70

2.4.1 Adjusting Offset

1) "Why does not the motor stop?"

When 0 V is specified as reference voltage for Servopack for speed/torque control, the motor may rotate at a very slow speed and fail to stop. This happens when reference voltage from the host controller or external circuit has a slight reference offset (in mV units). If this offset is adjusted to 0 V, the motor will stop.

When reference voltage from the host controller or external circuit has an offset

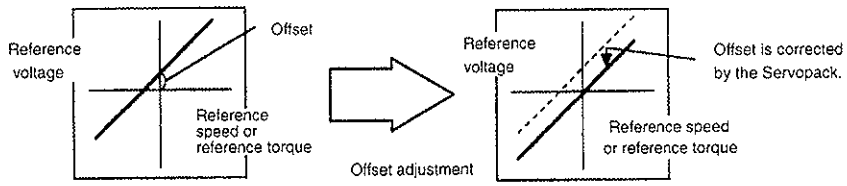

2) The following two methods can be used to adjust the reference offset to 0 V.

1) Automatic adjustment of reference offset	Reference offset is automatically adjusted to 0 V.
2) Manual adjustment of reference offset	Reference offset can be intentionally set to a specified value.

NOTE If a position control loop is formed in the host controller, do not use automatic adjustment in 1. Always use manual adjustment in 2.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3) For detailed adjustment procedures, refer to the following sections.

	Adjustment Method
1) Automatic adjustment of reference offset	*3.2.7 Reference Offset Automatic Adjustment*
2) Manual adjustment of reference offset	*3.2.8 Speed Reference Offset Manual Adjustment Mode*

2.4.2 Dynamic Brake

1) The Servopack enters servo OFF status when:


- Servo ON input signal (S-ON, CN1-14) is turned OFF
- Servo alarm occurs
- Power is turned OFF

Then, stops the servomotor by **dynamic brake (DB)**.

2.4.3 Using Zero-Clamp

1) The zero-clamp function is used for a system in which the host controller does not form a position loop by speed reference input.


In other words, this function is used to cause the motor to stop and enter a servo locked status when the input voltage of speed reference V-REF is not 0 V. When the zero-clamp function is turned ON, an internal position loop is temporarily formed, causing the motor to be clamped within one pulse. Even if the motor is forcibly rotated by external force, it returns to the zero-clamp position.

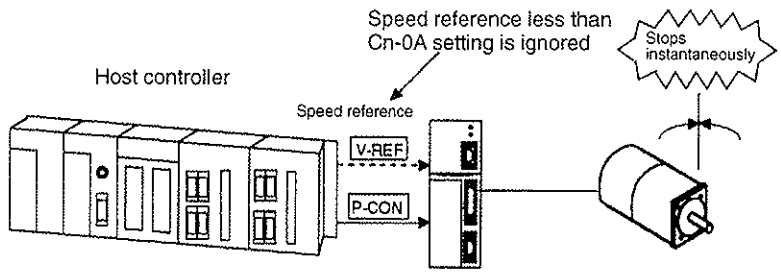

TERMS

Dynamic brake (DB)

One of the general methods to cause a motor sudden stop. "Dynamic brake" suddenly stops a servomotor by shorting its electrical circuit.
This dynamic brake circuit is incorporated in the Servopack.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2) Set the following memory switch so that input signal $\overline{\text{P-CON}}$ can be used to enable or disable the zero-clamp function.

Cn-01Bit A	Control Mode Selection	Factory Setting:0
Cn-01Bit B	Control Mode Selection	Factory Setting:0

→ Input $\overline{\text{P-CON}}$ CN1-15 Proportional Control, etc.

Cn-01 Setting		Control Mode	
Bit B	Bit A		
0	1	**Zero-clamp Speed Control** This speed control allows the zero-clamp function to be set when the motor stops. • A speed reference is input from V-REF (CN1-3). • $\overline{\text{P-CON}}$ (CN1-15) is used to turn the zero-clamp function ON or OFF. $\overline{\text{P-CON}}$ (CN1-15) is open (OFF) → Turns zero-clamp function OFF $\overline{\text{P-CON}}$ (CN1-15) is closed (ON) → Turns zero-clamp function ON • Torque reference input T-REF (CN1-1) cannot be used.	Servopack Speed reference V-REF (CN1–3) Zero-clamp $\overline{\text{P-CON}}$ (CN1–3) **Zero-clamp is performed when the following two conditions are met:** **$\overline{\text{P-CON}}$ signal is closed.** **Motor speed is below the value set in Cn-0F (ZCLVL).**

3) Set in the following user constant the motor speed level at which zero-clamp is to be performed:

Cn-0F	ZCLVL Zero-Clamp Level	Unit: r/min	Setting Range: 0 to Maximum Speed	Factory Setting: 10

If zero-clamp speed control is selected, set the motor speed level at which zero-clamp is to be performed.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Conditions for Zero-clamp

Zero-clamp is performed when all the following conditions are met:

a) Zero-clamp speed control is selected.(Bits A and B of memory switch Cn-01 are set to 1 and 0, respectively.)

b) $\overline{\text{P-CON}}$ (CN1-15) is turned ON (0 V).


c) Motor speed drops below the preset value.

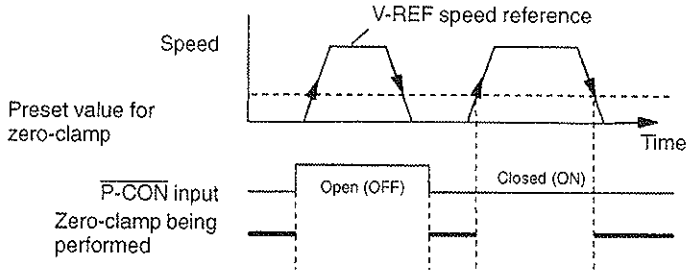

2.4.4 Using Holding Brake

1) **Outline**

Holding brake is useful when a servo drive is used to control a vertical axis. A servomotor with brake prevents the movable part from dropping due to gravitation when the system power is turned OFF.

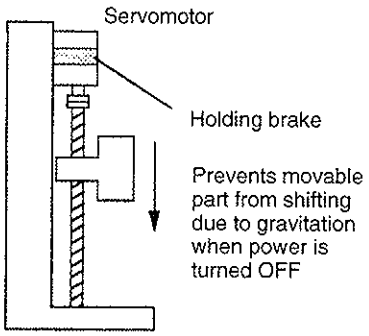


NOTE The built-in brake in Servomotor with brake is a de-energization operation type, which is used for holding purposes only and cannot be used for braking purposes. Use the holding brake only to retain a stopped motor. Brake torque is more than 100% of the rated motor torque.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2) Use Servopack contact output-signal $\overline{BK}$ and brake power supply to form a brake ON/OFF circuit.

An example of standard wiring is shown below.

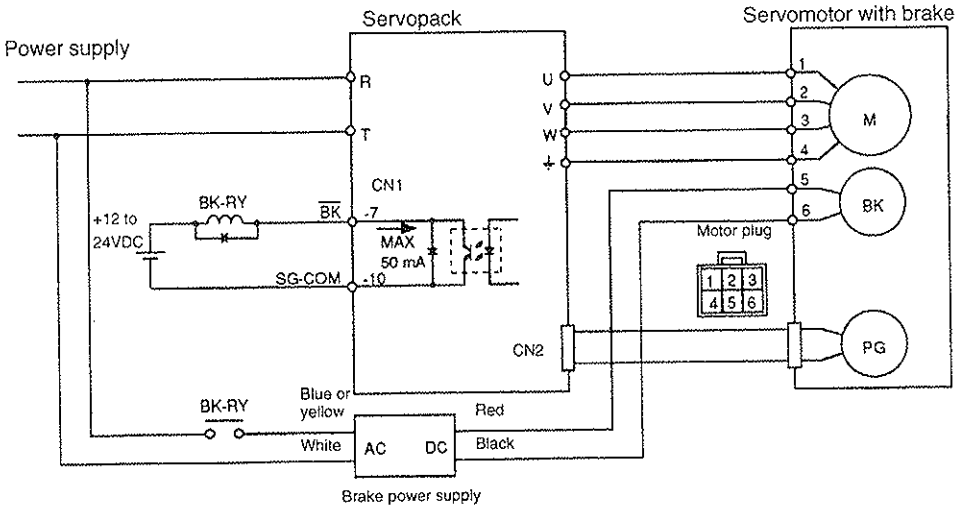

BK-RY: Brake control relay

Brake power supply has two types (200 V, 100 V).

Output → $\overline{BK}$ CN1-7 Brake Interlock Output

This output signal controls the brake when a motor with brake is used. This signal terminal need not be connected when a motor without brake is used.

Related User Constants

Cn-12	Time delay from brake signal until servo OFF
Cn-15	Speed level for brake signal output during operation
Cn-16	Output timing of brake signal during motor operation

ON Status: Circuit between CN1-7 and CN1-10 is closed. CN1-7 is at low level.	Releases the brake.
OFF Status: Circuit between CN1-7 and CN1-10 is open. CN1-7 is at high level.	Applies the brake.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


2.5 Forming a Protective Sequence

This section describes how to use I/O signals from the Servopack to form a protective sequence for safety purposes.

2.5.1 Using Servo Alarm Output and Alarm Code Output 72
2.5.2 Using Servo ON Input Signal 75
2.5.3 Using Running Output Signal 76
2.5.4 Handling of Power Failure 78

2.5.1 Using Servo Alarm Output and Alarm Code Output

1) Basic Wiring for Alarm Output Signals

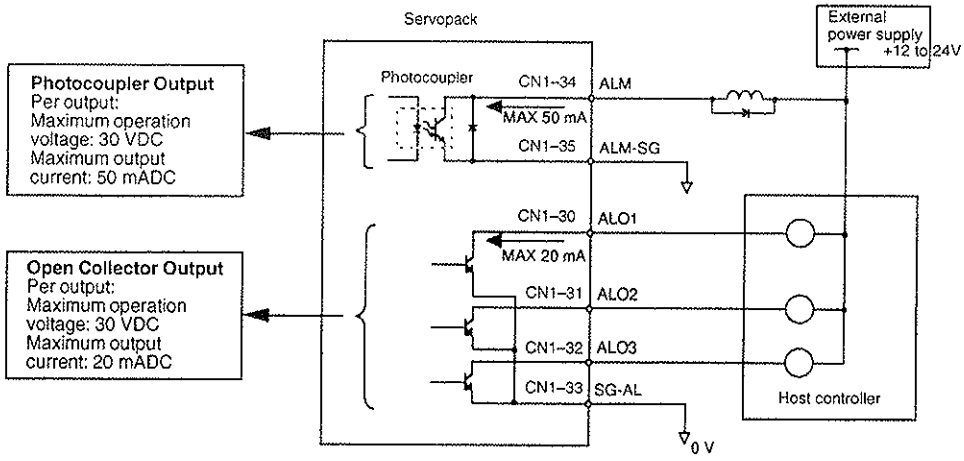


Provide an external power supply separately. There are no DC power available from Servopack for output signals.

2) Contact Output Signal ALM

Output → ALM CN1-34	Servo Alarm Output
Output → ALM-SG CN1-35	Signal Ground for Servo Alarm Output

Signal ALM is output when the Servopack detects an alarm.

Form an external circuit so that this alarm output (ALM) turns the Servopack OFF.



ON status:	Circuit between CN1-34 and CN1-35 is closed. CN1-34 is at low level.	Normal state
OFF status:	Circuit between CN1-34 and CN1-35 is open. CN1-34 is at high level.	Alarm state

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Alarm codes ALO1, ALO2, and ALO3 are output to indicate each alarm type.

3) **Contact Output Signals ALO1, ALO2, and ALO3**

Output → ALO1 CN1-30	Alarm Code Output
Output → ALO2 CN1-31	Alarm Code Output
Output → ALO3 CN1-32	Alarm Code Output
Output → SG-AL CN1-33	Signal Ground for Alarm Code Output

These signals output an alarm code to indicate the type of an alarm detected by the Servopack.

Use these signals to display alarm codes at the host controller.

NOTE Using Alarm Codes:
When an alarm is detected, alarm output (ALM) causes the external circuit to turn the SGDL Servopack OFF. The alarm code remains output for at least 100 ms. For this reason, the host controller must read the alarm code within 100 ms of the alarm occurrence. When an alarm signal is output, be sure to identify the cause of the problem, take corrective action and operate again. For trouble shooting problems and procedures, refer to 5.2 Troubleshooting.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4) Relationship between Alarm Display and Alarm Code Output

Alarm Display and Alarm Code Output:

Alarm Display	Alarm Code Output			Servo Alarm (ALM) Output	Alarm Type	Alarm Description
	ALO1	ALO2	ALO3			
A.10	○	×	×	×	Overcurrent	Overcurrent flowed thorough the main circuit. Servopack overheated.
A.40	×	×	○	×	Overvoltage	Main circuit DC voltage has exceeded approximately 420 V.
A.51	○	×	○	×	Overspeed	Motor speed has exceeded the maximum allowable speed.
A.70	○	○	○	×	Overload	Motor and Servopack are overloaded.
A.C*□	○	×	○	×	Overrun Disconnection of PG signal line	Overrun occurred due to motor or encoder signal wiring faults. Encoder signal line is disconnected.
A.F3	×	○	×	×	Power loss alarm	After power was turned OFF, power was turned ON again within power holding time. Power loss occurred during operation.
CPF00	Undefined				Digital Operator transmission error	Communication error occurred between Digital Operator and Servopack.
CPF01						
A.99	×	×	×	○	No error	

○ : Output transistor is ON
× : Output transistor is OFF
* : Displays an alarm category number.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

5) When the servo alarm (ALM) is output, eliminate the cause of the alarm and set the following $\overline{\text{ALMRST}}$ input signal at high level (+12 to 24 V) to reset the alarm state.

→ Input $\overline{\text{ALMRST}}$ CN1-18	Alarm Reset

This signal is used to reset the servo alarm state.


Normally, this signal terminal need not be wired. This is because an external circuit is normally formed so that servo power is turned OFF when servo alarm is output. Alarm state is automatically reset when servo power is turned ON next time.

Alarm state can be reset using the Digital Operator.

When an alarm occurs, always eliminate the cause before resetting the alarm state. *5.2.1 Troubleshooting Problems with Alarm Display* describes how to troubleshoot the system when an alarm arises.

2.5.2 Using Servo ON Input Signal

1) This section describes how to wire and use contact input signal "servo ON ($\overline{\text{S-ON}}$)." Use this signal to forcibly turn the servomotor OFF from the host controller.

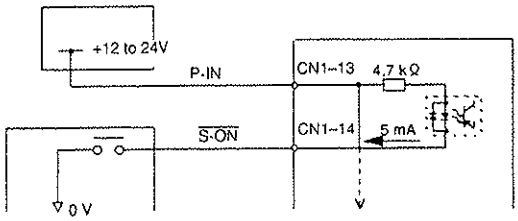


→ Input $\overline{\text{S-ON}}$ CN1-14	Servo ON

This signal is used to turn the motor ON or OFF.

ON: CN1-14 is at low level	Turns the motor ON. This is normal operation state (called "servo ON state").
OFF: CN1-14 is at high level	Turns the motor OFF. This is inoperable state (called "servo OFF state"). If the servo is turned OFF during motor operation, the motor is decelerated to a stop by applying dynamic brake (standard setting). This function can be selected by setting bits 6 and 7 of memory switch Cn-01.


Servo ON



Motor is ON

Motor is operated according to input signals.

Servo OFF



Motor is OFF

Motor cannot run.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


NOTE Do not use the $\overline{\text{S-ON}}$ signal to start or stop the motor. Always use an input reference to start and stop the motor.

2) If the $\overline{\text{S-ON}}$ signal is not to be used, set the following memory switch to 1:

Cn-01 Bit 0	Use of Servo ON Input Signal	Factory Setting: 0

This memory switch is used to enable or disable the servo ON input signal $\overline{\text{S-ON}}$ (CN1-14).

When external short-circuit wiring is omitted, set the memory switch to "1."




When S-ON is not used, this short-circuit wiring can be omitted.

Setting	Meaning
0	Uses servo ON signal $\overline{\text{S-ON}}$. (When CN1-14 is open, servo is OFF. When CN1-14 is at 0 V, servo is ON.)
1	Does not use servo ON signal $\overline{\text{S-ON}}$.

2.5.3 Using Running Output Signal


1) This section describes how to wire and use contact output signal $\overline{\text{TGON}}$ as a running output signal. This signal indicates that a servomotor is currently running.

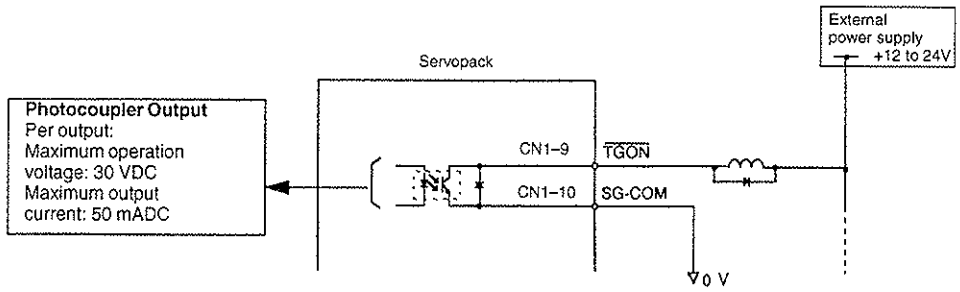

Output → $\overline{\text{TGON}}$ CN1-9	Running Output (Torque Limit Output)

This output signal indicates that the motor is currently running.

It is used as an external interlock.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

ON status:	Circuit between CN1-9 and CN1-10 is closed. CN1-9 is at low level.	Motor is running. (Motor speed is greater than the preset value.)
OFF status:	Circuit between CN1-9 and CN1-10 is open. CN1-9 is at high level.	Motor is stopped. (Motor speed is below the preset value.)


Preset value: Cn-0B (zero-speed level)

Note This function is changed to another function depending on the setting of bit 4 of memory switch Cn-01.

2) To use $\overline{\text{TGON}}$ as a running output signal, set the following memory switch to "0."

Cn-01 Bit 4	$\overline{\text{TGON}}$ Output Signal Selection	Factory Setting: 0

This memory switch is used to set output conditions for output signal $\overline{\text{TGON}}$ (CN1-9)



When $\overline{\text{TGON}}$ signal is changed, the following bit data are also changed:

- Status indication mode bit data
- Monitor mode Un-05 bit 4

Setting	Meaning
0	**Uses $\overline{\text{TGON}}$ as a running output signal.** **TGON compares motor speed with the value set in Cn-0B (TGONLV).** **Motor speed ≥ preset value** — **Closes circuit between CN1-9 and 1CN-10.** **Motor speed < preset value** — **Opens circuit between CN1-9 and 1CN-10.**
1	**Uses $\overline{\text{TGON}}$ as a torque limit output signal.** TGON compares an internal torque (current) reference inside the SGDL Servopack with the preset value. Preset Value: Cn-08 (TLMTF) Cn-09 (TLMTR) Cn-18 (CLMIF): $\overline{\text{P-CL}}$ input only Cn-19 (CLMIR): $\overline{\text{N-CL}}$ input only Internal torque (current) reference ≥ preset value — Closes the circuit between CN1-9 and CN1-10 Internal torque (current) reference < preset value — Opens the circuit between CN1-9 and CN1-10

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3) Use the following user constant to specify the output conditions for running output signal TGON.


Cn-0B	TGONLV	Zero-Speed Level	Unit: r/min	Setting Range: 1 to Maximum Speed	Factory Setting: 20

This user constant is used to set the speed level at which the Servopack determines that the motor is running and then outputs a signal.

The following signals are output when motor speed exceeds the preset value. (The circuit between CN1-9 and CN1-10 is closed when motor speed exceeds the preset value.)

Signals are output when motor speed exceeds the preset value.


• $\overline{\text{TGON}}$ (CN1-9) • Status indication mode bit data • Monitor mode Un-05 bit 4
User Constant Setting: Memory switch Cn-01 bit 4 = 0



2.5.4 Handling of Power Failure

1) If the Servopack detects instantaneous voltage drop in power supply, it outputs alarm A.F3 to prevent a hazardous situation.

ALM output is OFF (circuit between CN1-34 and CN1-35 is open)

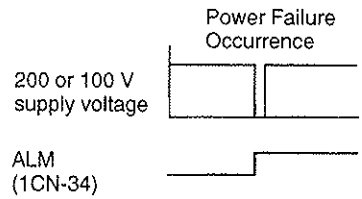

Note Clearing Servo Alarm:

To change a user constant that is made valid by turning the Servopack OFF and then ON, always wait for at least the "power holding time" after the Servopack is turned OFF, then turn the Servopack ON. Follow the procedure below.

- Make sure that all indicators (LEDs) on the Digital Operator have gone OFF.
- Make sure that the power and alarm indicators (LEDs) on the front panel of the Servopack have gone OFF.

Then, turn the power ON again.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Reason

When clearing servo alarm, the Servopack will operate normally even if it is turned ON without waiting "power holding time" after being turned OFF. In this case, however, the inside of the Servopack has not yet been reset (power ON reset). Therefore, user constants that have been modified do not become valid if these constants are made valid by turning the power OFF and then ON. Although the modified (new) settings appear on the display, the old settings are still valid inside the Servopack.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2.6 Special Wiring

This section describes special wiring methods including the one for noise control. Always refer to *2.6.1 Notes on Wiring* and *2.6.2 Wiring for Noise Control*, and refer to other sections as necessary.

2.6.1 Wiring Instructions 80
2.6.2 Wiring for Noise Control 82
2.6.3 Using More Than One Servo Drive 87
2.6.4 Using Regenerative Units 88
2.6.5 Using SGDL Servopack with High Voltage Line 91
2.6.6 Connector Terminal Layouts 93

2.6.1 Wiring Instructions


To ensure safe and stable operation, always refer to the following wiring instructions.

NOTE Always use the following cables for reference input and encoder wiring.

	Cable Type	Yaskawa Drawing No.	Maximum Allowable Length
For reference input	Twisted-pair cables	DE9404859	3 m (9.8 ft.)
For encoder	Multiconductor shielded twisted-pair cable	B9400064 (for incremental encoder)	20 m (65.6 ft.)

- Trim off the excess portion of the cable to minimize the cable length.

NOTE For a ground wire, use as thick a cable as possible.



- At least class 3 grounding (ground to 100 Ω or less) is recommended.
- Always use one-line grounding.
- If the motor is insulated from the machine, ground the motor directly.

NOTE Do not bend or apply tension to cables.


- Since the conductor of a signal cable is very thin (0.2 to 0.3 mm), handle it with adequate care.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

NOTE Use a noise filter to prevent noise interference. (For details, refer to the following *Caution*.)

- If the servo is to be used near private houses or may receive noise interference, install a noise filter on the input side of the power supply line. Since this Servopack is designed as an industrial device, it provides no mechanism to prevent noise interference.

Noise filter



NOTE To prevent malfunction due to noise, take the following actions:


- Position the input reference device and noise filter as close to the Servopack as possible.
- Always install a surge absorber circuit in the relay, solenoid and magnetic contactor coils.
- The distance between a power line (such as a power supply line or motor cable) and a signal line must be at least 30 cm (12 in). Do not put the power and signal lines in the same duct or bundle them together.
- Do not share the power supply with an electric welder or electrical discharge machine. When the Servopack is placed near a high-frequency oscillator, install a noise filter on the input side of the power supply line.

Note a) Since Servopack uses high-speed switching elements, signal lines may receive noise. To prevent this, always take the above actions.
b) For details of grounding and noise filters, refer to *2.6.2 Wiring for Noise Control.*

NOTE Use a molded-case circuit breaker (MCCB) or fuse to protect the power supply line from high voltage.

- This Servopack is directly connected to commercial power supply without a transformer. Always use an MCCB or fuse to protect the servo system from accidental high voltage.
- Select an appropriate MCCB or fuse according to the Servopack capacity and the number of Servopacks to be used as shown below.

MCCB



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

MCCB or Fuse for Each Power Capacity

Power Voltage	Servopack Type	Power Capacity Per Servopack (kVA) (see note 1)	Power Capacity Per MCCB or Fuse (A) (see note 2)
200 V	SGDL-A3AS	0.25	5
	SGDL-A5AS	0.3	
	SGDL-01AS	0.5	
	SGDL-02AS	0.75	
	SGDL-04AS	1.2	9
	SGDL-08AS	2.2	16
100 V	SGDL-A3BS	0.2	5
	SGDL-A5BS	0.3	
	SGDL-01BS	0.5	
	SGDL-02BS	0.75	8
	SGDL-03BS	1.4	15

Note 1) Power capacity at rated load

2) Operating characteristics (25°C): 2 seconds or more for 200%, 0.01 second or more for 700%

3) A fast-operating fuse cannot be used because the Servopack power supply is a capacitor input type. A fast-operating fuse may blow out when the power is turned ON.

2.6.2 Wiring for Noise Control


1) Example of Wiring for Noise Control

a) This Servopack uses high-speed switching elements in the main circuit. It may receive "switching noise" from these high-speed switching elements if wiring or grounding around the Servopack is not appropriate. To prevent this, always wire and ground the Servopack correctly.

b) This Servopack has a built-in microprocessor (CPU). To protect the microprocessor from external noise, install a noise filter in place.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

c) The following is an example of wiring for noise control.

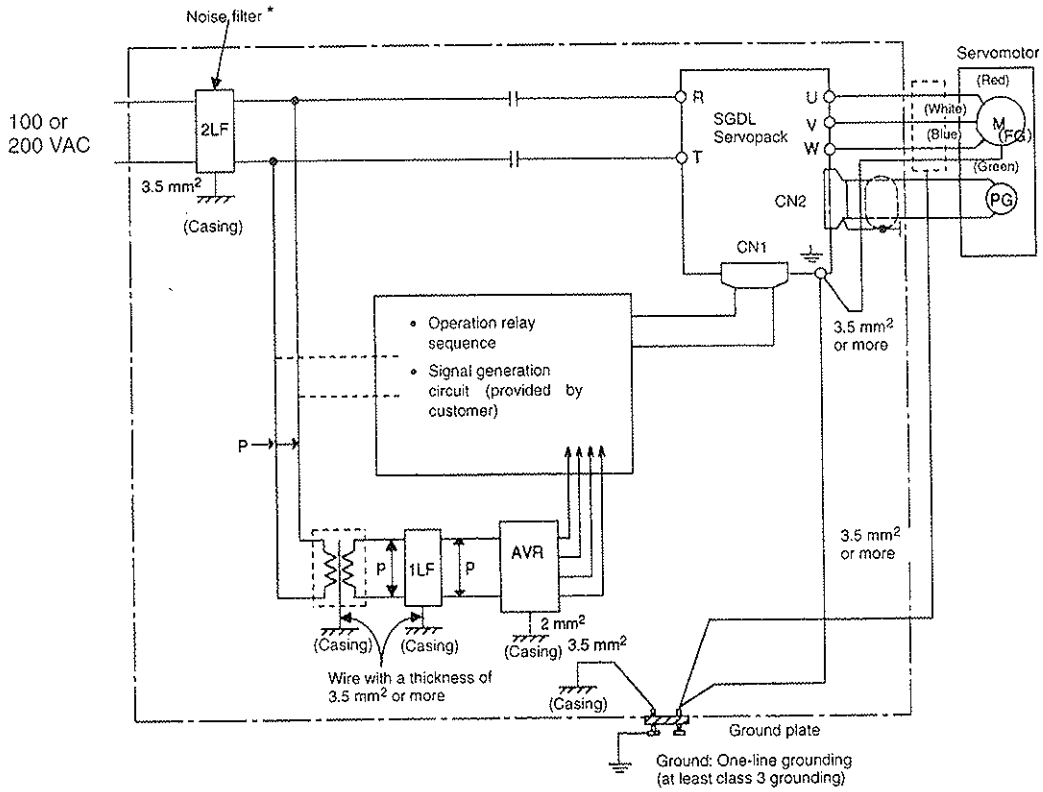

* When using a noise filter, always observe the following wiring instructions:

Note a) For a ground wire to be connected to the casing, use a thick wire with a thickness of at least 3.5 mm² (preferably, plain stitch cooper wire).
b) For wires indicated by P↕, use twisted-pair cables whenever possible.

2) Correct Grounding

- Always ground the motor frame.

  Always connect servomotor frame terminal FG (green) to the Servopack ground terminal. Be sure to ground the ground terminal.

  - If the servomotor is grounded via the machine, a switching noise current will flow from the Servopack power unit through motor stray capacitance. The above grounding is required to prevent the adverse effects of switching noise.


- If the reference input line receives noise, do the following.

  Ground the 0 V line (such as SG-V and SG-T) of the reference input line. If the main circuit wiring for the motor is accommodated in a metal conduit, ground the conduit and its junction box. For all grounding, always use one-line grounding.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3) Noise Filter Installation



a) Use an inhibit type noise filter to prevent noise from the power supply line.



Install a noise filter on the power supply line for peripheral equipment as necessary.

The following table lists recommended noise filters for each Servopack type.

Noise Filter Types

Power Voltage	Servopack Type		Noise Filter Connection	Recommended Noise Filter	
				Type	Specifications
200 V	30 W (0.04 HP)	SGDL-A3AS		LF-205A	Single-phase 200 VAC, 5 A
	50 W (0.07 HP)	SGDL-A5AS			
	100 W (0.13 HP)	SGDL-01AS			
	200 W (0.27 HP)	SGDL-02AS			
	400 W (0.53 HP)	SGDL-04AS		LF-210	Single-phase 200 VAC, 10 A
	750 W (1.01 HP)	SGDL-08AS		LF-220	Single-phase 200 VAC, 20 A
100 V	30 W (0.04 HP)	SGDL-A3BS		LF-205A	Single-phase 200 VAC, 5 A
	50 W (0.07 HP)	SGDL-A5BS			
	100 W (0.13 HP)	SGDL-01BS			
	200 W (0.27 HP)	SGDL-02BS		LF-210	Single-phase 200 VAC, 10 A
	300 W (0.39 HP)	SGDL-03BS		LF-220	Single-phase 200 VAC, 20 A


Note These noise filters are manufactured by Tokin Corp. and available from Yaskawa. For noise filters, contact your nearest Yaskawa sales representatives.


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

b) Always observe the following installation and wiring instructions. Incorrect use of a noise filter halves its benefits.

- Separate input lines from output lines.


Do not put the input and output lines in the same duct or bundle them together.



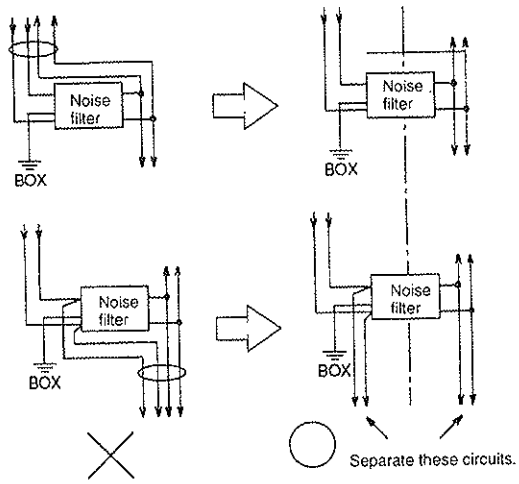

- Separate the noise filter ground wire from the output lines.

Do not accommodate the noise filter ground wire, output lines and other signal lines in the same duct or bundle them together.

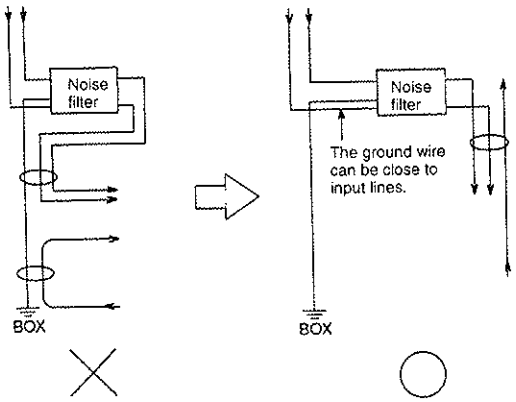


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2.6.2 Wiring for Noise Control cont.


- Connect the noise filter ground wire directly to the ground plate.

Do not connect the noise filter ground wire to other ground wires.

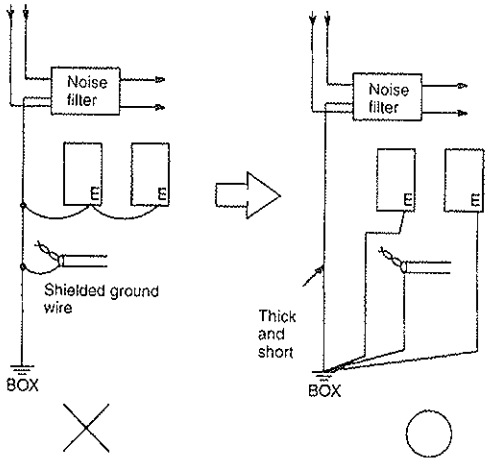

- When grounding a noise filter inside a Unit.


If a noise filter is located inside a Unit, connect the noise filter ground wire and the ground wires from other devices inside the Unit to the ground plate for the Unit first, then ground these wires.

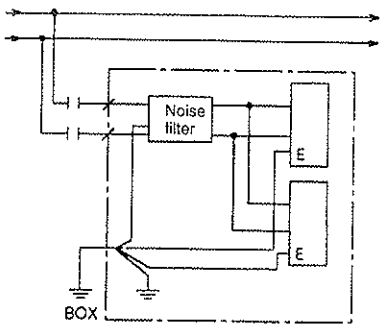

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2.6.3 Using More Than One Servo Drive

Example of Wiring More than One Servo Drive

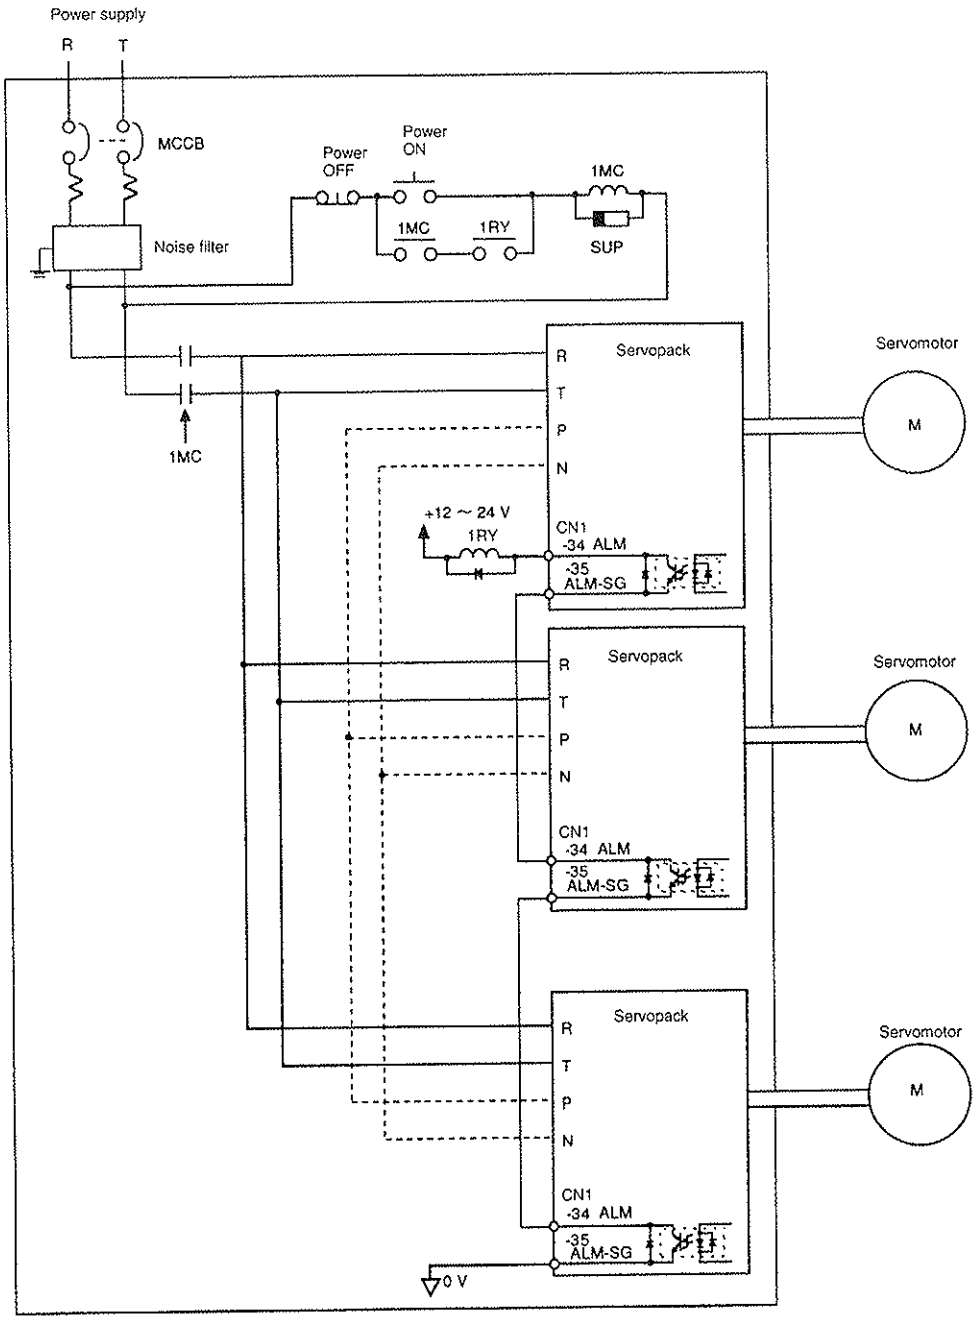

1) Connect the alarm output (ALM) terminals for the three Servopacks in series to enable alarm detection relay 1RY to operate. This is because ALM is a logical complement output signal, so the output transistor is turned OFF when the system enters an alarm state.


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2) When some of the Servopack's regenerative capacity is not sufficient, connect terminals P and N for regenerative units in parallel. Since the Servopack power supply is a capacitor input type, connecting P and N terminals in parallel produces high power capacity over all, enhancing regenerative performance.


3) When connecting P and N terminals in parallel, be sure to turn all the Servopack power ON simultaneously. Do not turn any Servopack power ON when connection P and N terminals in parallel.

4) Multiple servos can share a single MCCB or noise filter. Always select a MCCB or noise filter that has enough capacity for the total power capacity (load conditions) of those servos. For details, refer to page 82.

MCCB




Noise filter



2.6.4 Using Regenerative Units

1) **"What is a Regenerative Unit?"**

A regenerative unit is designed to safely consume electric energy that is generated when the servomotor is rotated by the load.

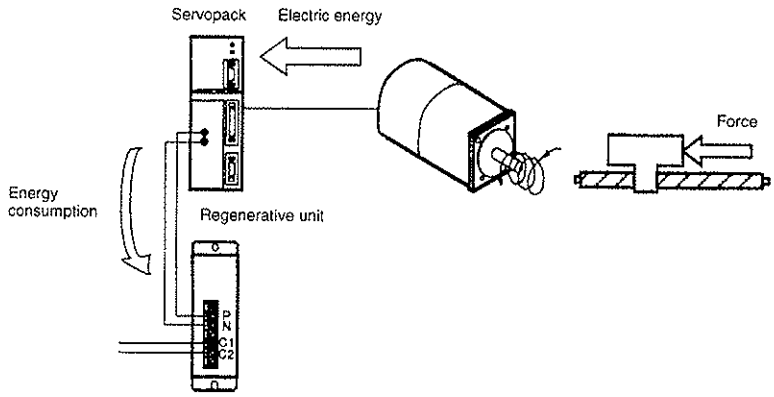

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2) "When is a Regenerative Unit Required?"


For general use, a generative unit is not required. In the following cases, however, the user must determine whether a regenerative unit is required or not:


a) When the motor is used to control a vertical axis.

b) When the motor starts and stops frequently.

c) When load inertia exceeds the allowable load inertia on the motor side.

d) When the motor rotates at a speed higher than the rated speed (3000 r/min).

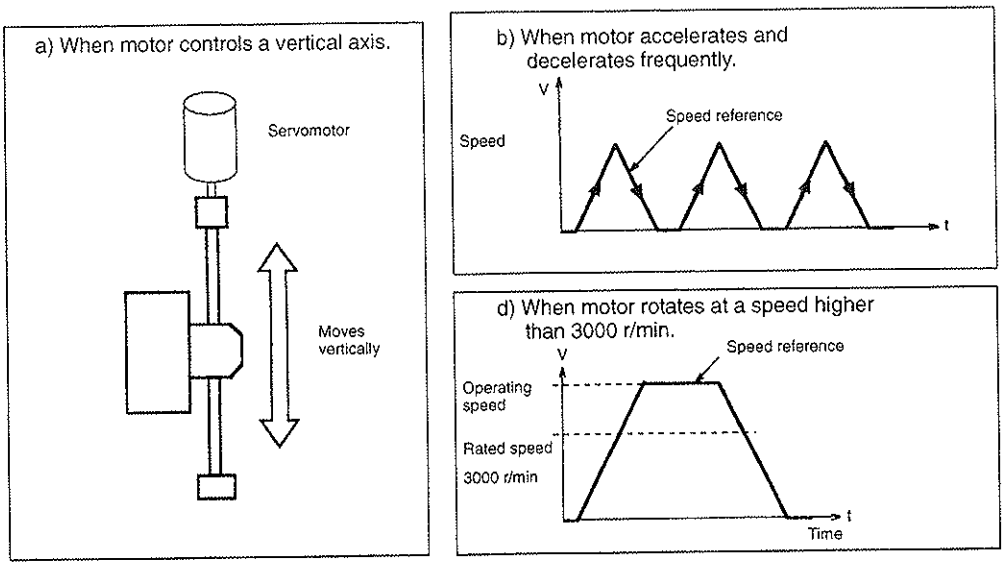

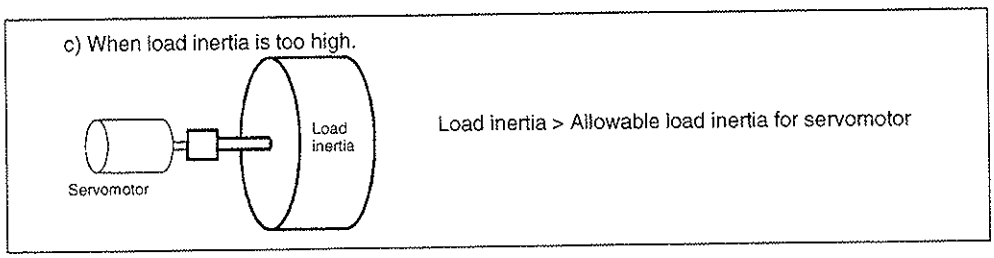


3) "How can we Determine Whether a Regenerative Unit is Required or Not?"

Using software "regenerative capacity check program" enables the user to easily determine whether a regenerative unit is required. This software is included as part of Yaskawa proprietary software "**AC servomotor sizing software**," which is supplied free of charge. Use this software as necessary.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4) Connecting a Regenerative Unit (JUSP–RG08 type)

The standard connection diagram for a regenerative unit (JUSP–RG08) is shown below.

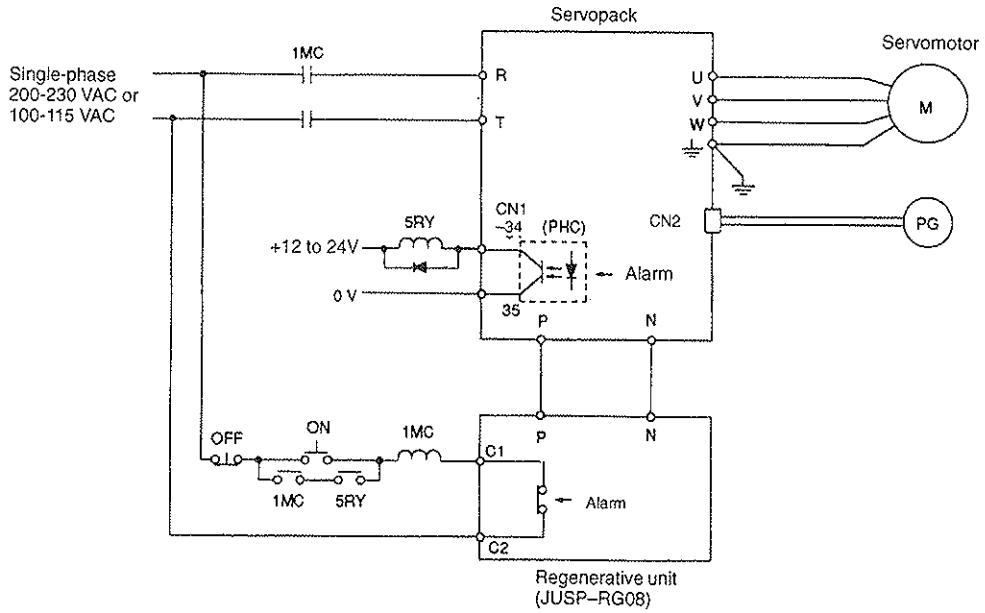

a) A regenerative unit has the following fault detection functions:


- Detecting disconnection in a regenerative resistor
- Detecting faults in a regenerative transistor
- Detecting overvoltage

b) When one of these fault detection functions operates, the internal alarm relay is actuated. Then, the circuit between output terminals C1 and C2 is opened.

c) Form a sequence so that the Servopack power is turned OFF when the alarm relay is actuated.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

5) Connecting a Regenerative Unit (JUSP–RG08C type)

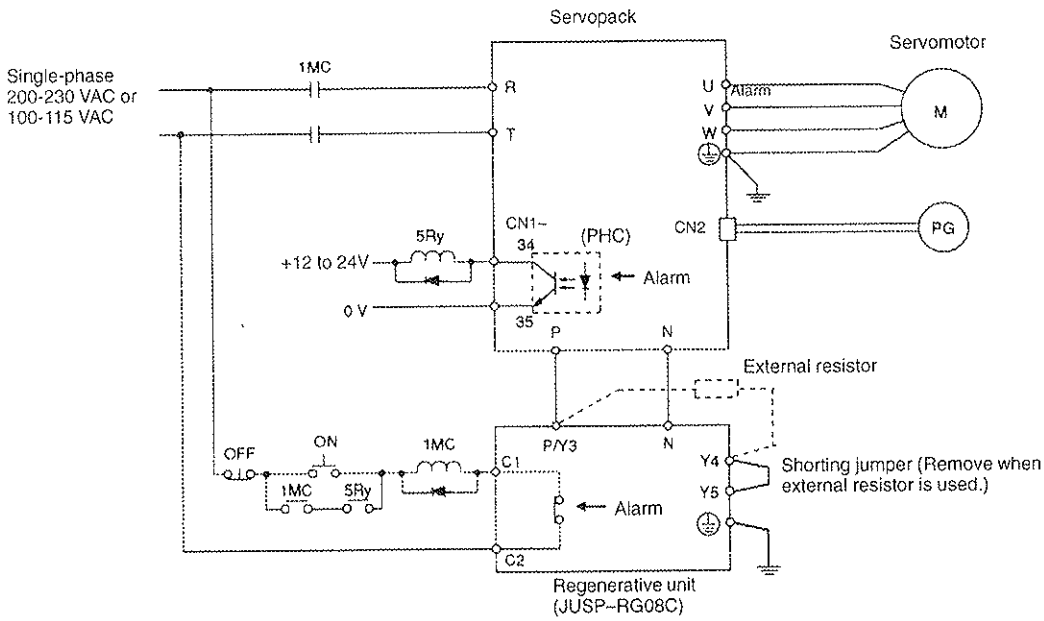

a) A regenerative unit has the following fault detection functions:

- Detecting disconnection in a regenerative resistor
- Detecting faults in a regenerative transistor
- Detecting overvoltage

b) When one of these fault detection functions operates, the internal alarm relay is actuated. Then, the circuit between output terminals C1 and C2 is opened.

c) When an external resistor is used, remove the shorting jumper between Y4 and Y5. Then, connect the resistor between P/Y3 and Y4.

d) The resistance value of the external resistor should be 50 Ω min.

2.6.5 Using SGDL Servopack with High Voltage Line

1) SGDL Servopacks are divided into single-phase 200 V and single-phase 100 V types according to supply voltage.

If, however, three-phase 400 VAC class (400 V, 440 V) power supply must be used, prepare the following power transformer (for single-phase).

<Primary side>		<Secondary side>
1) 400 or 440 VAC	→	200 VAC
2) 400 or 440 VAC	→	100 VAC


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2) Select appropriate power transformer capacity according to the following table.

Supply Voltage	Servopack Type	Power Supply Capacity Per SGDE Servopack (kVA) (see note)
200 V	SGDL-A3AS	0.25
	SGDL-A5AS	0.3
	SGDL-01AS	0.5
	SGDL-02AS	0.75
	SGDL-04AS	1.2
	SGDL-08AS	2.2
100 V	SGDL-A3BS	0.2
	SGDL-A5BS	0.3
	SGDL-01BS	0.5
	SGDL-02BS	0.75
	SGDL-03BS	1.4

Note At rated load.

3) When 400-V-class supply voltage is used, power must be turned ON and OFF on the primary side of the power transformer.

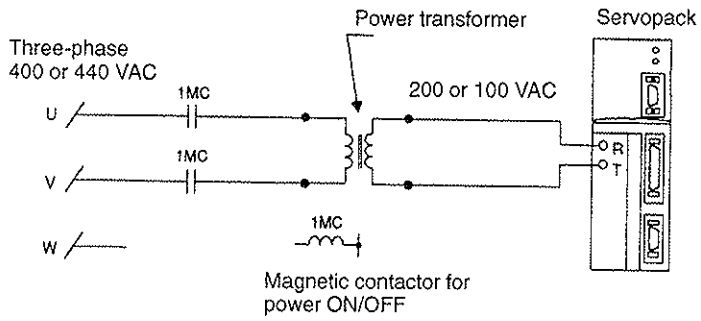

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2.6.6 Connector Terminal Layouts

This section describes connector terminal layouts for Servopacks and Servomotors.

1) Servopack Connectors

CN1 Terminal Layout

2	SG	Torque reference input 0 V	1	T-REF	Torque reference input	20	PAO	PG output phase A	19	SG	PG output signal 0V
4	SG	Speed reference input 0 V	3	V-REF	Speed reference input	22	PBO	PG output phase B	21	*PAO	PG output phase A
6	—	Not used	5	—	Not used	24	PCO	PG output phase C	23	*PBO	PG output phase B
8	—	Not used	7	BK	Brake interlock signal output	26	—	Not used	25	*PCO	PG output phase C
10	SG-COM	BK/V-CMP/ TGON common 0 V	9	TGON	TGON signal output	28	—	Not used	27	—	Not used
12	N-CL	Reverse external torque limit ON input	11	P-CL	Forward external torque limit ON input	30	ALO1	Alarm code output (open collector output)	29	—	Not used
14	S-ON	Servo ON input	13	+24 V IN	External power supply input	32	ALO3		31	ALO2	Alarm code output (open collector output)
16	P-OT	Forward rotation prohibited	15	P-CON	P control input	34	ALM	Servo alarm output	33	SG-AL	Alarm code output common 0 V
18	ALMRST	Alarm reset input	17	N-OT	Reverse rotation prohibited	36	FG	Frame ground	35	ALM-SG	Servo alarm output

- **Servopack Side** Connector type: 10236-52A2JL (manufactured by 3M)
- **Cable Side** Connector type: 10136-3000VE (manufactured by 3M)
  Connector case type: 10336-52A0-008 (manufactured by 3M)

CN2 Terminal Layout

2	PG0V	PG power supply 0 V	1	PG0V	PG power supply 0 V	12	—	Not used	11	—	Not used
4	PG5V	PG power supply +5 V	3	PG0V		14	PC	PG input phase C	13	—	Not used
6	PG5V		5	PG5V	PG power supply +5 V	16	PA	PG input phase A	15	*PC	PG input phase C
8	—	Not used	7	—	Not used	18	PB	PG input phase B	17	*PA	PG input phase A
10	—	Not used	9	—	Not used	20	FG	Frame ground	19	*PB	PG input phase B


- **Servopack Side** Connector type: 10220-52A2JL (manufactured by 3M)
- **Cable Side** Connector type: 10120-3000VE (manufactured by 3M)
  Connector case type: 10320-52A0-008 (manufactured by 3M)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2.6.6 Connector Terminal Layouts cont.


2) Connectors for Incremental Encoder

1	Channel A output	Blue
2	Channel $\overline{A}$ output	Blue/Black
3	Channel B output	Yellow
4	Channel $\overline{B}$ output	Yellow/Black
5	Channel C output	Green
6.	Channel $\overline{C}$ output	Green/Black
7	0 V (power supply)	Gray
8	+5 V (power supply)	Red
9	Frame ground (FG)	Orange

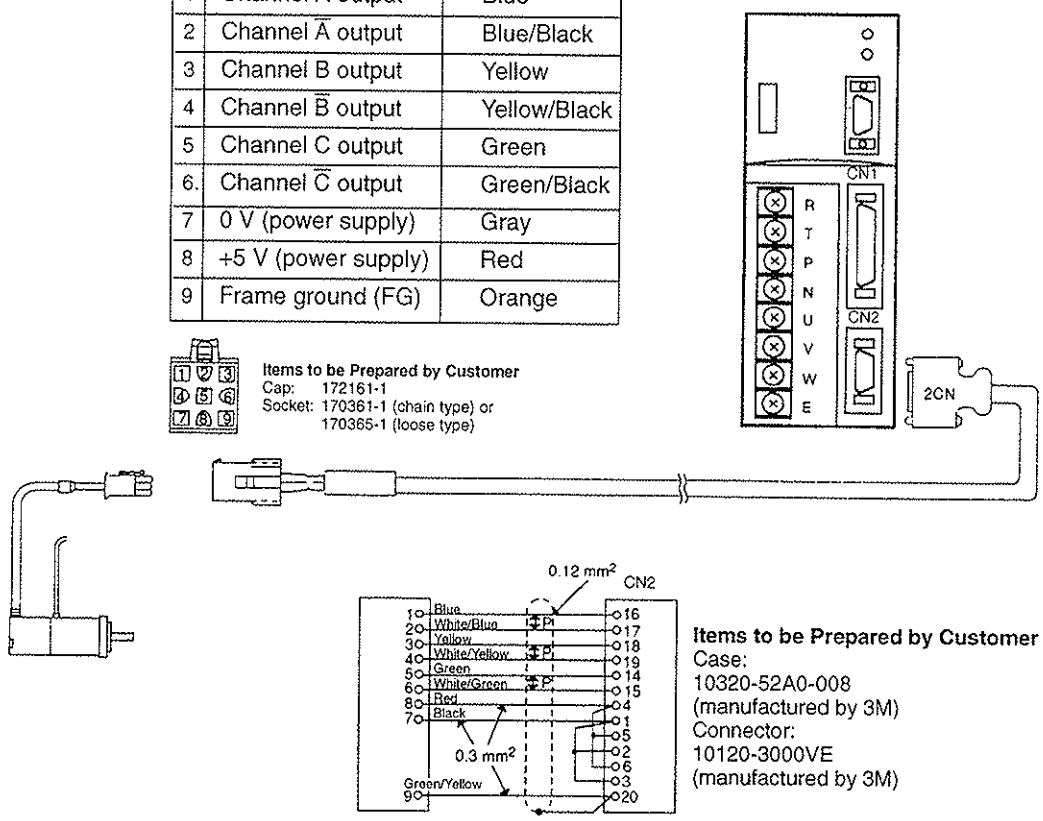

3) Connectors and Terminals for Standard-type Motor without Brake


1	Phase U	Red
2	Phase V	White
3	Phase W	Blue
4	Frame ground (FG)	Green

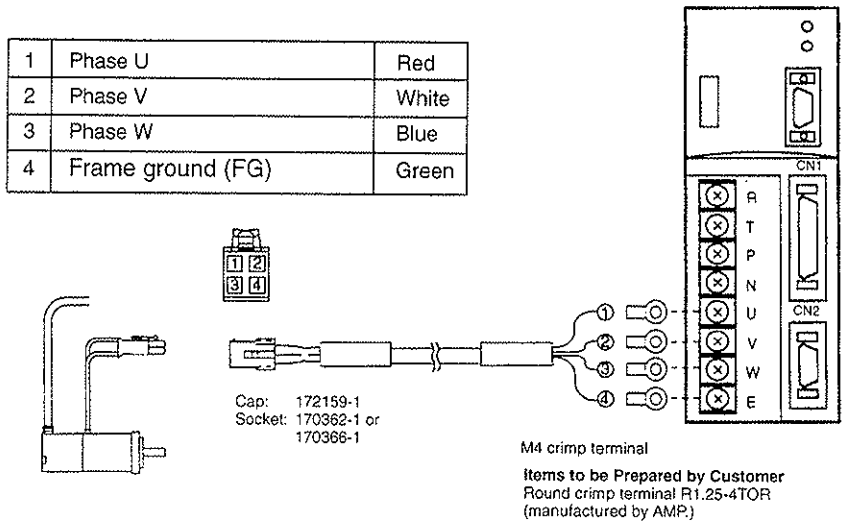

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4) Connectors and Terminals for Motor with Brake

1	Phase U	Red
2	Phase V	White
3	Phase W	Blue
4	Frame ground (FG)	Green
5	Brake terminal	Black
6	Brake terminal	Black

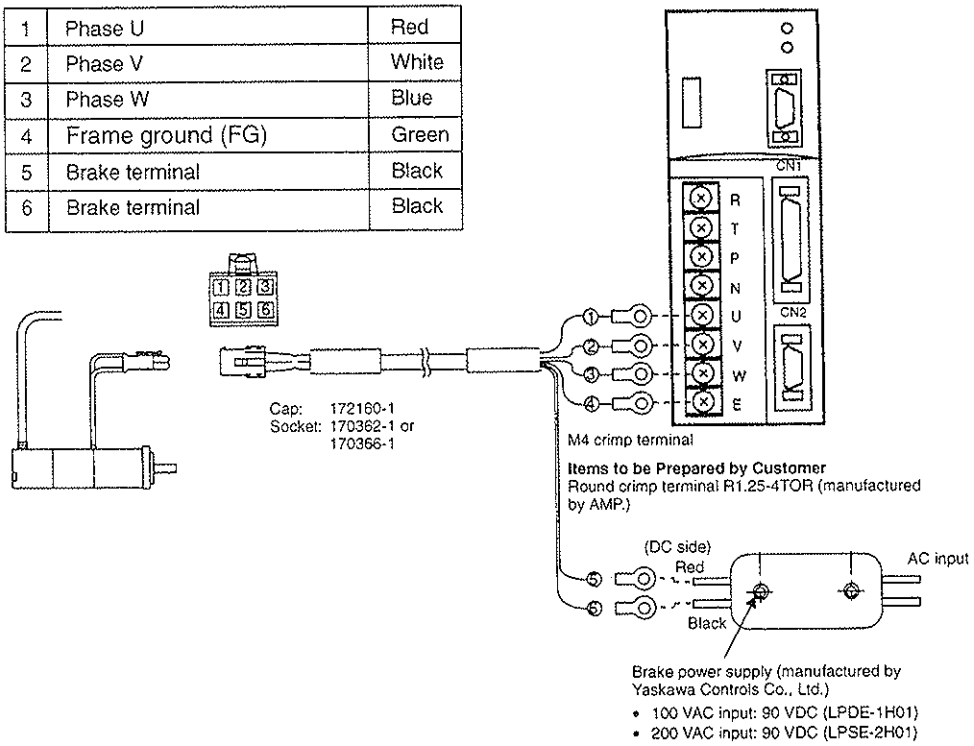

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

USING THE DIGITAL OPERATOR 3

This chapter describes the basic operation of the digital operator and the convenient features it offers.
All constant settings and motor operations are possible by simple, convenient, operation.
Operate the digital operator as you read through this chapter.

3.1 Basic Operations 98
- 3.1.1 Connecting the Digital Operator 98
- 3.1.2 Resetting Servo Alarms 99
- 3.1.3 Basic Functions and Mode Selection 100
- 3.1.4 Operation in Status Display Mode 101
- 3.1.5 Operation in User Constant Setting Mode 102
- 3.1.6 Operation in Monitor Mode 107

3.2 Using the Functions 110
- 3.2.1 Operation in Alarm Trace-back Mode 110
- 3.2.2 Operation Using the Digital Operator 112
- 3.2.3 Autotuning 115
- 3.2.4 Clearing Alarm Trace-back Data 121
- 3.2.5 Checking Motor Type 122
- 3.2.6 Checking Software Version 123
- 3.2.7 Speed Reference Offset Automatic Adjustment 123
- 3.2.8 Speed Reference Offset Manual Adjustment Mode 126

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


3.1 Basic Operations

This section describes the basic operations using the Digital Operator.

3.1.1 Connecting the Digital Operator 98
3.1.2 Resetting Servo Alarms 99
3.1.3 Basic Functions and Mode Selection 100
3.1.4 Operation in Status Display Mode 101
3.1.5 Operation in User Constant Setting Mode 102
3.1.6 Operation in Monitor Mode 107

3.1.1 Connecting the Digital Operator

The Digital Operator is available as two types: JUSP-OP02A-1 (Hand-held Type) and JUSP-OP03A (Mount Type).
Each type is connected to the Servopack as shown below.

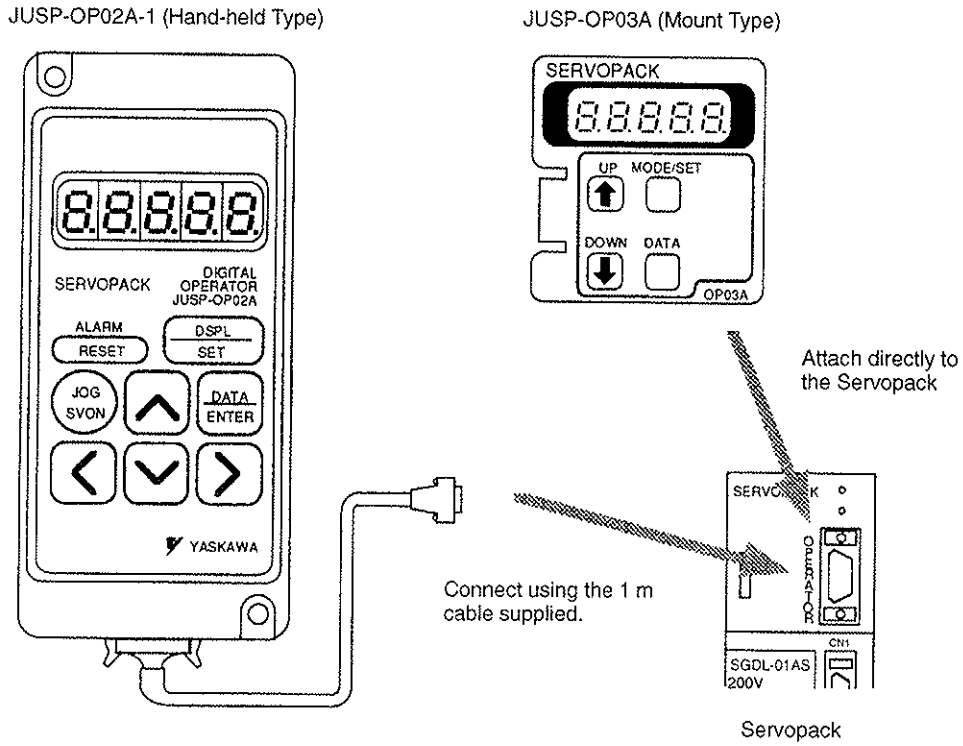


- The Digital Operator connector can be connected or disconnected while the Servopack power is ON.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3.1.2 Resetting Servo Alarms

Servo alarms can be reset using the Digital Operator. (Servo alarms can also be reset by the CN1-18, $\overline{\text{ALMRST}}$ input signal. Refer to *2.5.1 Using Servo Alarm Output and Alarm Code Output* for details.)

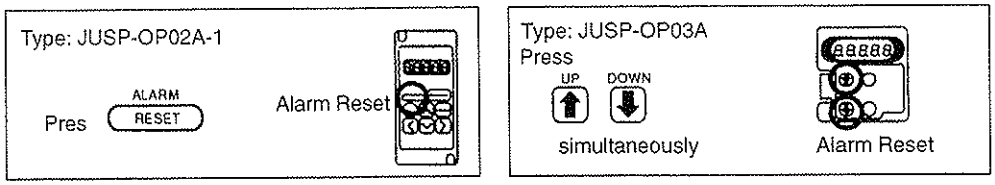

NOTE After an alarm occurs, remove the cause of the alarm before resetting it. Refer to *Section 5.2 Troubleshooting* to determine and remedy the cause of an alarm.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3.1.3 Basic Functions and Mode Selection

Digital Operator operation allows status display, user constant setting, operating reference, and auto-tuning operations.


Basic Mode Selection
The four basic modes are listed below. Each time the mode key is pressed, the next mode in the sequence is selected.

JUSP-OP02A-1




Press the DSPL SET key to switch the mode.

JUSP-OP03A



Press the MODE/SET key to switch the mode.

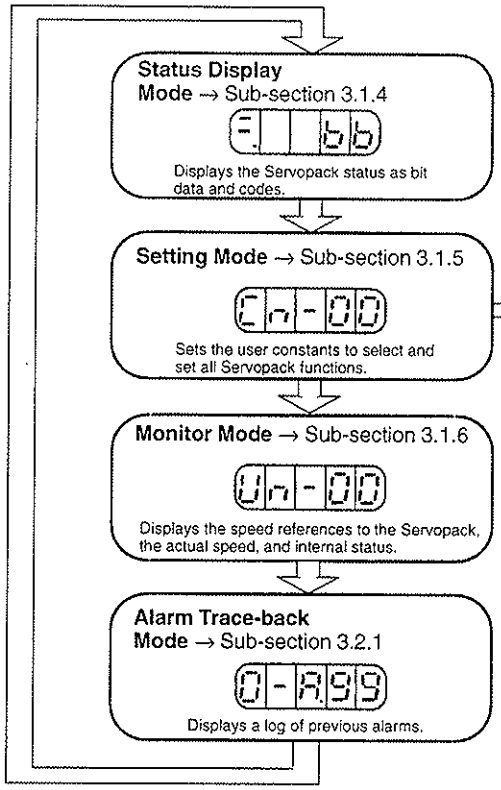

Special Modes

These modes are selected by setting a value for user constant Cn-00


Cn-00 Setting	Mode
00-00	Operation mode from digital operator → Sub-section 3.2.2
00-02	Clear alarm trace-back data → Sub-section 3.2.4
00-04	Motor-type check mode → Sub-section 3.2.5
00-05	Auto-tuning mode → Sub-section 3.2.3
00-06	Software-version check mode → Sub-section 3.2.6

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


3.1.4 Operation in Status Display Mode

The status display mode displays the Servopack status as bit data and codes.

- Selecting Status Display Mode

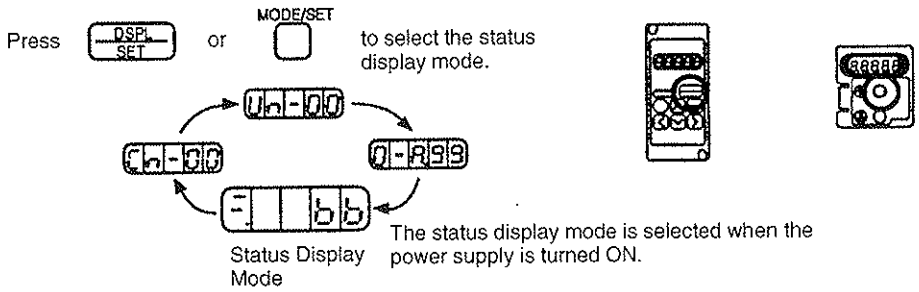

Keys to the status display are shown below.

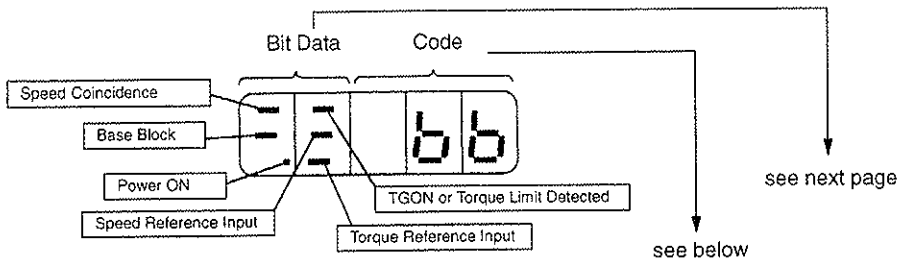

Code	Status
bb	Base block Servo OFF (motor power OFF)
run	Run Servo ON (motor power ON)
Pot	Forward Rotation Prohibited (P-OT) CN1-16 (P-OT) OFF. See Cn-01 Bit 2 (page 36).
not	Reverse Rotation Prohibited (N-OT) CN1-17 (N-OT) OFF. See Cn-01 Bit 3 (page 36).
A.00	Alarm Status Displays the alarm number.
A.02	
)	

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Bit Data	Description
Power ON	Lit when Servopack power ON. Not lit when Servopack power OFF.
Base Block	Lit for base block. Not lit at servo ON.
Speed Coincidence	Lit if motor speed reaches speed reference. Otherwise, not lit.
TGON or Torque Limit Detected (selected by Cn-01 Bit 4)	Lit if motor speed exceeds preset value. Not lit if motor speed is below preset value. Preset value: Set in Cn-0B (20 r/min is factory setting)
	Lit if Servopack internal torque reference exceeds preset value. Not lit if Servopack internal torque reference is below preset value. Preset value: Set in Cn-08, -09 (max. torque is standard setting) Cn-18 is preset value during CN1-11 ($\overline{\text{P-CL}}$) input. Cn-19 is preset value during CN1-12 ($\overline{\text{N-CL}}$) input. Not lit during torque control.
Speed Reference Input	Lit if input speed reference exceeds preset value. Not lit if input speed reference is below preset value. Specified value: Set in Cn-0B (20 r/min is factory setting)
Torque Reference Input	Lit if input torque reference exceeds preset value. Not lit if input torque reference is below preset value. Preset value: Set in Cn-0B (10% rated torque is standard setting)

3.1.5 Operation in User Constant Setting Mode

1) Two types of user constant are used


a) Constant Settings (Cn-03 to Cn-23)
b) Memory Switches (Cn-01, Cn-02)

The setting method is different for each type.
The Servopack offers a large number of functions, which are selected and adjusted by the user constant settings.
The constant settings (Cn-03 to Cn-23) allow setting of a constant within a fixed range.
The memory switches (Cn-01, Cn-02) allow the required functions to be selected.
Refer to *Appendix C List of User Constant Settings.*

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2) Using the Setting Mode for Constant Settings (Cn-04 to Cn-26)


The constant settings (Cn-04 to Cn-26) allow setting of a constant. Check the permitted range of the constant in *Appendix C List of User Constant Settings*, before changing the data. The example below shows how to change user setting Cn-04 from 80 to 40.




JUSP-OP02A-1

For JUSP-OP02A-1

1) Press DSPL SET to select the user constant setting mode.

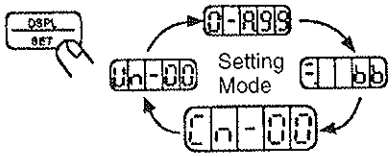


2) Select the user constant number to set.
Press the < and > keys to select the digit.
Press the ^ and v keys to change the value.



3) Press DATA ENTER to display the current data for the user constant selected at step 2.




4) Set the required data.
Press the < and > keys to select the digit.
Press the ^ and v keys to change the value.



5) Press DATA ENTER to store the data.




6) Press DATA ENTER once more to display the user constant number again.



7) Repeat steps 2 to 6 as often as required.


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3.1.5 Operation in User Constant Setting Mode cont.




For JUSP-OP03A


1) Press MODE/SET to select the user constant setting mode.

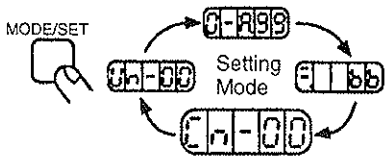


2) Press the UP and DOWN keys to select the user constant number to set.



3) Press DATA to display the current data for the user constant selected at step 2.




4) Press the UP and DOWN keys to change the data to the required value.




Value changes rapidly when key held down

5) Press DATA to store the data.



The stored data blinks.

6) Press DATA once more to display the user constant number again.




7) Repeat steps 2 to 6 as often as required.

- Refer to *Appendix C List of User Constant Settings*

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3) Using the Setting Mode for Memory Switches (Cn-01, Cn-02)


Turn the bits of the memory switches ON and OFF to select the functions required. The example below shows how to turn ON Bit 3 of memory switch Cn-01.




JUSP-OP02A-1

For JUSP-OP02A-1


1) Press DSPL SET to select the user constant setting mode.

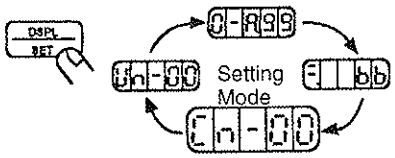


2) Select the user constant number to set.
Press the ◁ and ▷ keys to select the digit.
Press the △ and ▽ keys to change the value.




3) Press DATA ENTER to display the current data for the memory switch selected at step 2.

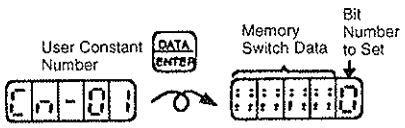

4) Press the ◁ and ▷ keys to select the bit number to set.

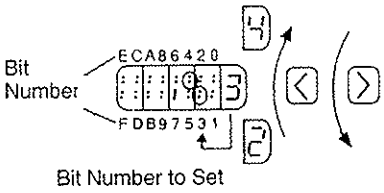


5) Press the △ and ▽ keys to set the memory switch data ON or OFF for the bit number.



6) Repeat steps 4 and 5 as often as required.

7) Press DATA ENTER to store the data.



The stored data blinks.

TERMS

Turning Bits ON and OFF


Memory switches use bits, not numbers, to select functions.
Sixteen bits are available (1 to 9 and A to E). Select the required functions by turning the appropriate bit ON (function ON) or OFF (function OFF).




: = OFF
1 = ON

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

8) Press DATA ENTER once more to display the user constant number again.




- Refer to *Appendix C List of User Constant Settings.*




For JUSP-OP03A


1) Press MODE/SET to select the user constant setting mode.

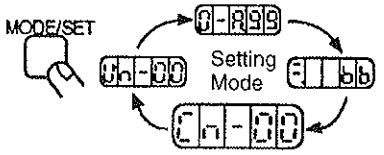


2) Press the UP and DOWN keys to select the user constant number to set.



3) Press MODE/SET to display the current data for the memory switch selected at step 2.

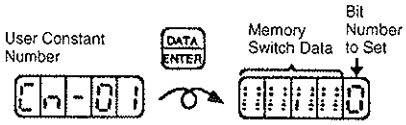

4) Press the UP and DOWN keys to select the bit number to set.

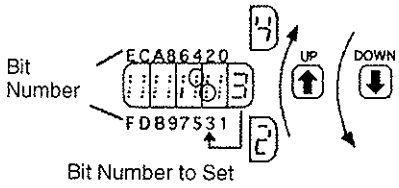


5) Press MODE/SET to set the memory switch data ON or OFF for the bit number.




6) Repeat steps 4 and 5 as often as required.

7) Press DATA to store the data.



8) Press DATA once more to display the user constant number again.



- Refer to *Appendix C List of User Constant Settings*


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3.1.6 Operation in Monitor Mode

1) The monitor mode allows the reference values input into the Servopack, I/O signal status, and Servopack internal status to be monitored.
The monitor mode can be set during motor operation.

2) **Using the Monitor Mode**


The example below shows how to display 1500, the contents of monitor number Un-00.




JUSP-OP02A-1

For JUSP-OP02A-1


1) Press DSPL SET to select the monitor mode

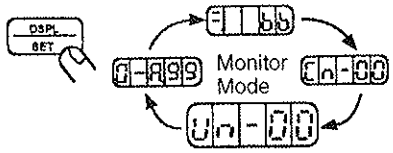

2) Press the ∧ and ∨ keys to select the monitor number to display.




3) Press DATA ENTER to display the data for the monitor number selected at step 2.



4) Press DATA ENTER once more to display the monitor number again.







JUSP-OP03A

For JUSP-OP03A


1) Press MODE/SET to select the monitor mode.

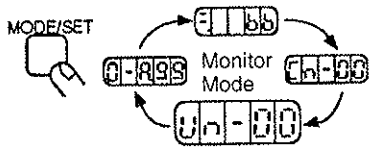

2) Press the UP and DOWN keys to select the monitor number to display.



3) Press DATA to display the data for the monitor number selected at step 2.



4) Press DATA once more to display the monitor number again.




Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3) Keys to Monitor Mode Display are shown below.

Monitor Number	Monitor Display
Un-00	Actual motor speed Units: r/min.
Un-01	Input speed reference Units: r/min.
Un-02	Internal torque reference Units: % (with respect to rated torque)
Un-03	Number of pulses from motor U-phase edge Units: pulses
Un-04	Electrical angle Units: deg
Un-05	Internal status bit display

Internal Status Bit Display



see below

Bit #	Description		Related I/O Signal, User Constant
1	Servo alarm		CN1-34(ALM)
2	Dynamic brake ON		
3	Reverse rotation mode		Cn-02 Bit 0, CN2-7(DIR)
4	During motor rotation or torque limit		CN1-9 ($\overline{\text{TG-ON}}$), status display mode
5	Not used		
6	Mode switch ON		
7	During forward current limit	Or contact input speed control	CN1-11 ($\overline{\text{P-CL}}$)
8	During reverse current limit		CN1-12 ($\overline{\text{N-CL}}$)
9	Motor power ON		
10	A-phase		CN2-16(PA), CN2-17(∗PA)
11	B-phase		CN2-18(PB), CN2-19(∗PB)
12	C-phase		CN2-14(PC), CN2-15(∗PC)
13	U-phase		
14	V-phase		
15	W-phase		
16	Servo ON		CN1-14 ($\overline{\text{S-ON}}$) , Cn-01 Bit 0
17	P operation, zero clamp, or rotation direction input		CN1-15 ($\overline{\text{P-CON}}$) , Cn-01 Bit A, B, Cn-02 Bit 2
18	Forward overtravel		CN1-16 (P-OT), Cn-01 Bit 2
19	Reverse overtravel		CN1-17 (N-OT), Cn-01 Bit 3
20	SEN signal input		CN1-5 (SEN)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Un-06	1	Input reference pulse	CN1-1 (PLUS), CN1-2(∗PULS)
	2	Input pulse sign	CN1-3(SIGN), CN1-4 (∗SIGN)
	3	Error counter clear input	CN1-5 ($\overline{\text{CLR}}$), CN1-6(∗CLR)
	4 to 20	Not used	

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


3.2 Using the Functions

This section describes how to use the basic operations described in section 1 to operate and adjust the motor.

3.2.1 Operation in Alarm Trace-back Mode 110
3.2.2 Operation Using the Digital Operator 112
3.2.3 Autotuning 115
3.2.4 Clearing Alarm Trace-back Data 121
3.2.5 Checking Motor Type 122
3.2.6 Checking Software Version 123
3.2.7 Speed Reference Offset Automatic Adjustment 123
3.2.8 Speed Reference Offset Manual Adjustment Mode 126

3.2.1 Operation in Alarm Trace-back Mode

1) The alarm trace-back mode displays up to ten alarms which occurred previously. By allowing confirmation of what alarm occurred when, it is a useful aid to speed up troubleshooting.



Alarm Sequence Number
The higher the number, the older the alarm data

Alarm Code

Refer to *Section 5.2* for troubleshooting.

NOTE The alarm trace-back data are not cleared on alarm reset or when the Servopack power is turned OFF. This does not adversely affect operation.
The data are cleared using the special mode: Clear alarm trace-back data.
Refer to sub-section *3.2.4* for details.

Alarms CPF00 and CPF01 are not stored as alarm trace-back data, since they are operator-related alarms.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


2) Using the Alarm Trace-back Mode
Follow the procedure below to determine which alarms occurred previously.



JUSP-OP02A-1


For JUSP-OP02A-1


1) Press DSPL SET to select the alarm trace-back mode.

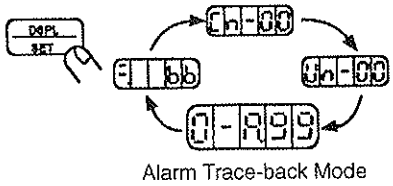

Alarm Trace-back Mode

2) Press the ∧ and ∨ keys to scroll the alarm sequence numbers up and down and display information on previous alarms. The higher the left-hand digit (alarm sequence number), the older the alarm data.






JUSP-OP03A


For JUSP-OP03A

1) Press MODE/SET to select the alarm trace-back mode.

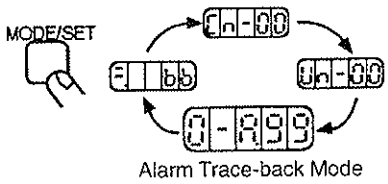

Alarm Trace-back Mode

2) Press the UP and DOWN keys to scroll the alarm sequence numbers up and down and display information on previous alarms. The higher the left-hand digit (alarm sequence number), the older the alarm data.

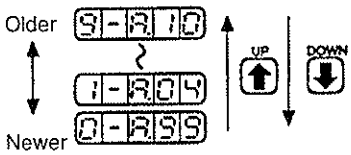


NOTE Refer to *Section 5.2* for troubleshooting.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3.2.2 Operation Using the Digital Operator

Simple Motor Check


Operation from the Digital Operator allows the Servopack to run the motor. This allows rapid checking of basic operations during machine set-up and testing, without the trouble of connecting a host controller.

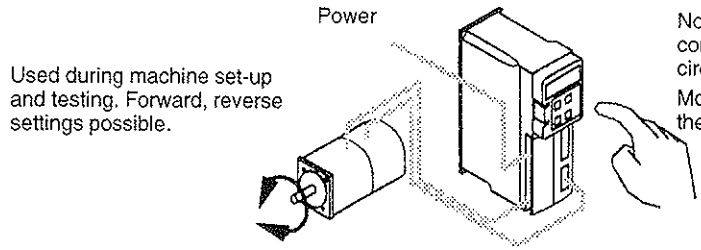

NOTE SGME Servomotor runs at 500 r/min. The motor speed connot be changed.

1) Operation Using the Digital Operator


Use the following procedure to operate the motor from the Digital Operator




JUSP-OP02A-1

For JUSP-OP02A-1

1) Press DSPL SET to select the user constant setting mode.

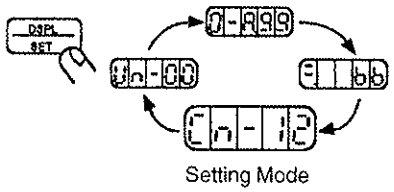


2) Select the user constant number Cn-00. (User constant Cn-00 is selected when the power is turned ON.)

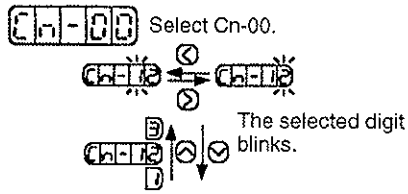

Press the < and > keys to select the digit.


Press the ^ and v keys to change the value.

3) Press DATA ENTER to display the current data for the user constant Cn-00.




Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4) Press the ∧ and ∨ keys to change the data to 00.
(This user constant is set to 00 when the power is turned ON.)

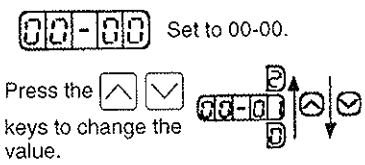


5) Press DSPL SET to set the Digital Operator in operation mode. Operation is now possible under Digital Operator control.




6) Press JOG SVON to set the servo ON status (motor power turned ON).

Select Servo ON/Servo OFF

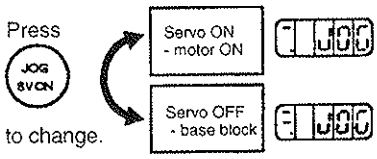

7) Press the ∧ and ∨ keys to operate the motor.


Motor Forward/Reverse Rotation

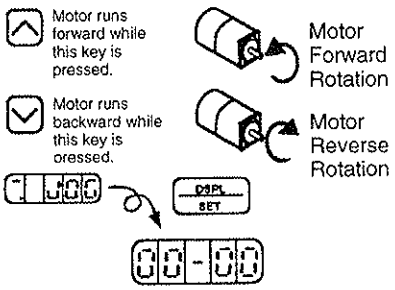


8) Press DSPL SET to revert to 00-00. This sets the servo OFF status (motor power turned OFF).

(Alternatively, press JOG SVON to set the servo OFF status.)


9) Press DATA ENTER to return to the setting mode display. This disables operation under Digital Operator control.





JUSP-OP03A

For JUSP-OP03A


1) Press MODE/SET to select the user constant setting mode.

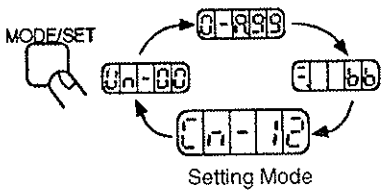

2) Press the UP and DOWN keys to select the user constant number Cn-00.
(User constant Cn-00 is selected when the power is turned ON.)

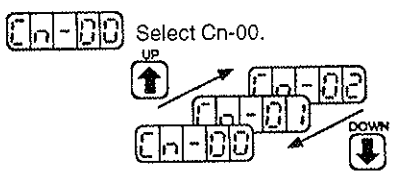


3) Press DATA to display the current data for the user constant Cn-00.




Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4) Press the UP and DOWN keys to change the data to 00.
(This user constant is set to 00 when the power is turned ON.)

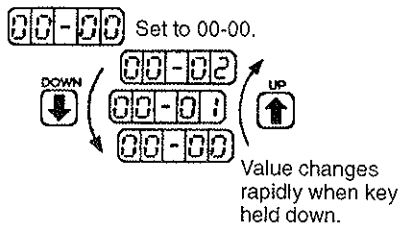


5) Press MODE/SET to set the Digital Operator in operation mode. Operation is now possible under Digital Operator control.

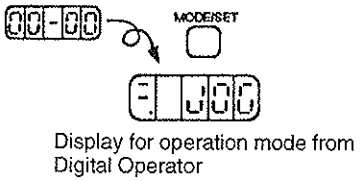


6) Press DATA to set the servo ON status (motor power turned ON).

Select Servo ON/Servo OFF

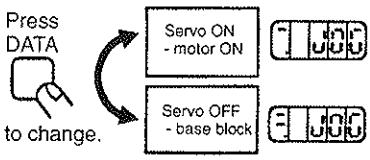


7) Press the UP and DOWN keys to operate the motor.


Motor Forward/Reverse Rotation

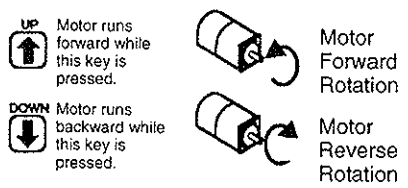

8) Press MODE/SET to revert to 00-00. This sets the servo OFF status (motor power turned OFF).
(Alternatively, press DATA to set the servo OFF status.)




9) Press DATA to return to the setting mode display. This disables operation under Digital Operator control.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3.2.3 Autotuning

No experience required to achieve optimum settings.
The Servopack contains a built-in autotuning function to automatically measure the machine characteristics and set the user constants.
Servo drives normally require tuning to match the machine configuration and rigidity. This tuning requires a great deal of experience and is difficult for a person unfamiliar with the tuning procedure.
However, autotuning allows even totally inexperienced people to easily complete the tuning.

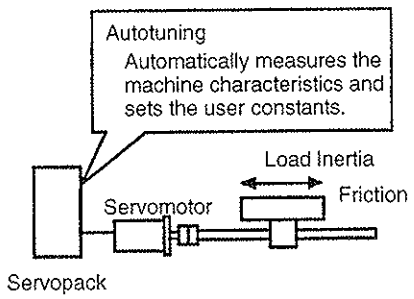


Autotuning is similar to auto-focus for a camera.

1) User Constants Automatically Settable with Autotuning

Cn-04	Speed loop gain
Cn-05	Speed loop integration time constant


Once autotuning has been completed, the autotuning procedure can be omitted for subsequent machines, providing the machine specifications remain unchanged.
It is sufficient to directly set the user constants for subsequent machines.
The **machine rigidity** can be selected from one of seven levels.

NOTE
- Conduct autotuning with the motor attached to the machine.
  Make sure that the machine is ready for operation and take sufficient safety precautions when operating the machine.
- Make sure that the $\overline{\text{P-CON}}$ signal is OFF (PI control is selected) before starting autotuning.



Machine Rigidity


The machine rigidity is one of the machine characteristics related to servo control. Set the servo to high response for a machine, such as a machine tool, with high rigidity, and to low response for a machine, such as a robot, with low rigidity.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2) Using Autotuning


Follow the procedure below to run autotuning.



JUSP-OP02A-1

For JUSP-OP02A-1


1) Press DSPL SET to select the user constant setting mode.

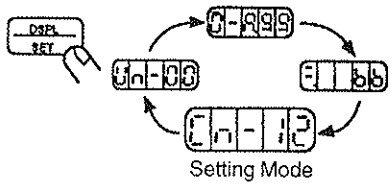


2) Select the user constant number Cn-00. (User constant Cn-00 is selected when the power is turned ON.)

Press the ◁ and ▷ keys to select the digit.


Press the △ and ▽ keys to change the value.

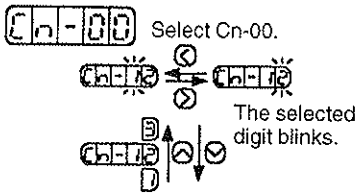


3) Press DATA ENTER to display the current data for the user constant Cn-00.




4) Press the △ and ▽ keys to change the data to 05.

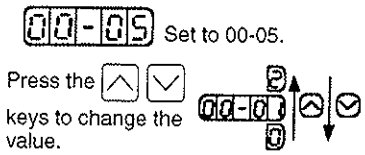


5) Press DSPL SET to display the machine rigidity.



6) Press the △ and ▽ keys to select the machine rigidity. If the actual rigidity is unknown, select medium rigidity.

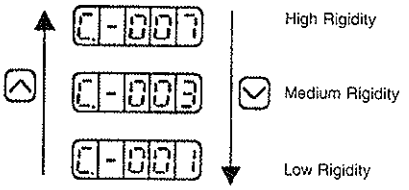


7) Press DSPL SET to select autotuning mode.




Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

8) Press JOG SVON to set the servo ON status.

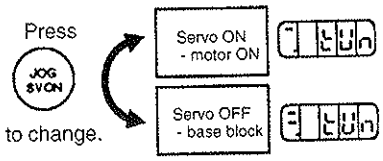


Select Servo ON/Servo OFF

9) Press the ∧ and ∨ keys to operate the motor.

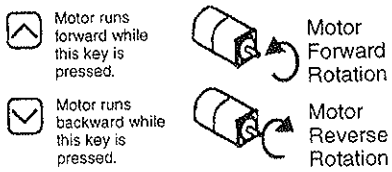

Motor Forward/Reverse Rotation


10) When autotuning is complete, the END message is displayed, as shown to the right.
Servo OFF status is automatically selected. If Servo ON/Servo OFF is selected by a signal from an external contact, turn this signal OFF.




11) Release the ∧ and ∨ keys to revert to the Un-05 display.



12) Press DATA ENTER to return to the setting mode display. This ends the autotuning operation.




- Refer to sub-section 3) on page 119 for the precautions relating to autotuning.




For JUSP-OP03A


1) Press MODE/SET to select the user constant setting mode.

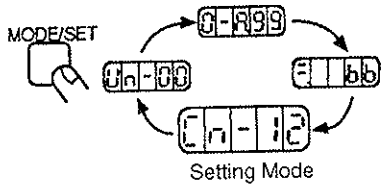

2) Press the UP and DOWN keys to select the user constant number Cn-00.
(User constant Cn-00 is selected when the power is turned ON.)

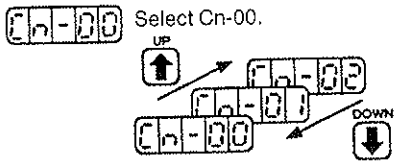


3) Press DATA to display the current data for the user constant Cn-00.




Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3.2.3 Autotuning cont.

4) Press the UP and DOWN keys to change the data to 05.

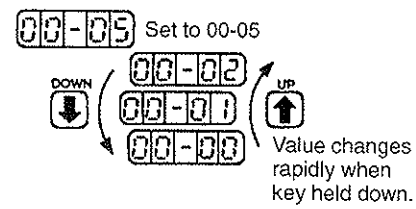


5) Press MODE/SET to display the machine rigidity.




Machine Rigidity Display

6) Press the UP and DOWN keys to select the machine rigidity.

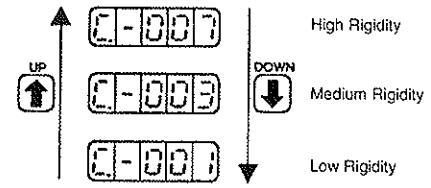


7) Press MODE/SET to select autotuning mode.



Autotuning Mode


8) Press DATA to set the servo ON status.

Select Servo ON/Servo OFF

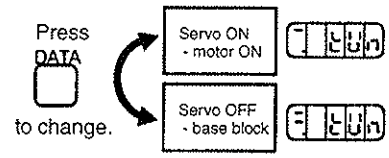

9) Press the UP and DOWN keys to operate the motor.

Motor Forward/Reverse Rotation

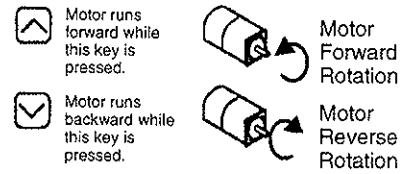

10) When autotuning is complete, the END message is displayed, as shown to the right.
Servo OFF status is automatically selected. If Servo ON/Servo OFF is selected by a signal from an external contact, turn this signal OFF.




Autotuning Complete

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

11) Release the UP and DOWN keys to revert to the 00-05 display.



12) Press DATA to return to the setting mode display. This ends autotuning operation.




Setting Mode Display

- Refer to the following sub-section 3) for the precautions relating to autotuning.

3) Precautions Relating to Autotuning

a) Speed Setting During Autotuning
The motor speed during autotuning is 500 r/min.
The motor runs intermittently while the ∧ or ∨ (or UP or DOWN) key is held down.
The motor does not rotate continuously.

b) **Machine Rigidity Selection**
Select the machine rigidity as described below. If the actual rigidity is unknown, select medium rigidity.



High Rigidity



Medium Rigidity



Low Rigidity

- If the Machine Resonates

At servo ON when the JOG SVON (or DATA) key is pressed or when the motor is operated by pressing the ∧ or ∨ (DOWN or UP) key, machine resonance indicates an inappropriate machine rigidity setting.
Follow the procedure below to correct the machine rigidity setting, and run autotuning once more.

(1) Press the DSPL SET (or MODE/SET) key to cancel autotuning.

(2) Press the DSPL SET (or MODE/SET) key once more to enter the machine rigidity setting mode. Reduce the setting by one.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

- If Autotuning Does Not End

Failure of autotuning to end (End), is caused by an inappropriate machine rigidity setting. Follow the procedure below to correct the machine rigidity setting, and run autotuning once more.

(1) Press the DSPL SET (or MODE/SET) key to cancel autotuning.


(2) Press the DSPL SET (or MODE/SET) key once more to enter the machine rigidity setting mode. Increase the setting by one.

Autotuning may not end for machines with large play or extremely low rigidity. In these cases, use conventional manual adjustment.


c) Input Signals

- The OT signal is enabled during autotuning. Input the OT signal during autotuning. To conduct autotuning without inputting these signals, set user constant Cn-01 Bits 2 and 3 to 1.

- Autotuning is not possible during ove (P-OT or N-OT signal OFF).

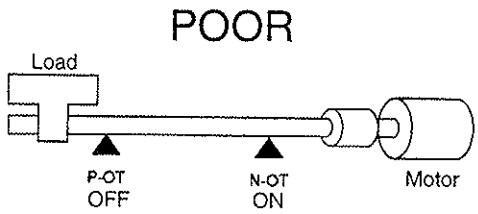

- Conduct autotuning when no overtravel has occurred (both P-OT and N-OT signal ON).

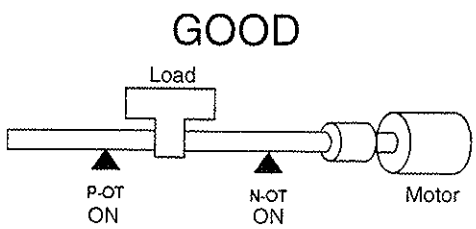

- Set the $\overline{\text{P-CON}}$ signal OFF during autotuning.

- If using the $\overline{\text{S-ON}}$ signal to set the servo ON status, display (End) before turning ON the $\overline{\text{S-ON}}$ signal.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3.2.4 Clearing Alarm Trace-back Data

1) This procedure clears the alarm history, which stores the alarms occurring in the Servopack. Each alarm in the alarm history is set to A99, which is not an alarm code. Refer to *3.2.1 Operation in Alarm Trace-back Mode* for details.


2) Follow the procedure below to clear the alarm trace-back data.




JUSP-OP02A-1

For JUSP-OP02A-1

1) Press DSPL SET to select the user constant setting mode.

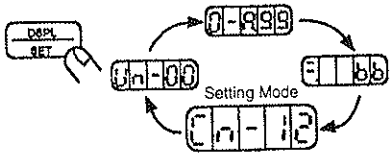


2) Select the user constant number Cn-00. (User constant Cn-00 is selected when the power is turned ON.)

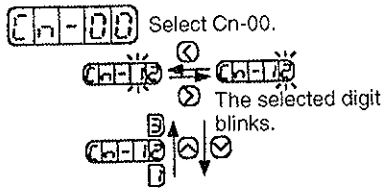


Press the ◁ and ▷ keys to select the digit.

Press the △ and ▽ keys to change the value.

3) Press DATA ENTER to display the current data for the user constant Cn-00.



4) Press the △ and ▽ keys to change the data to 02.

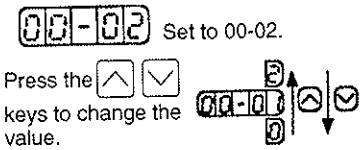



5) Press DSPL SET to clear the alarm trace-back data.



Clear the alarm trace-back data.

6) Press DATA ENTER to return to the user constant data display.






JUSP-OP03A


For JUSP-OP03A

1) Press MODE/SET to select the user constant setting mode.

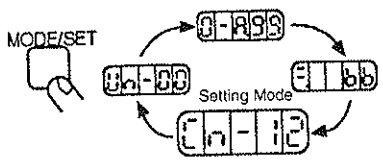


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


2) Press the UP and DOWN keys to select the user constant number Cn-00.
(User constant Cn-00 is selected when the power is turned ON.)

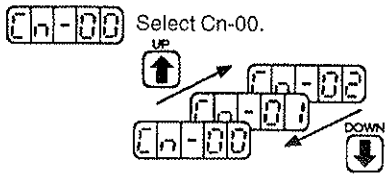


3) Press DATA to display the current data for the user constant Cn-00.




4) Press the UP and DOWN keys to change the data to 02.

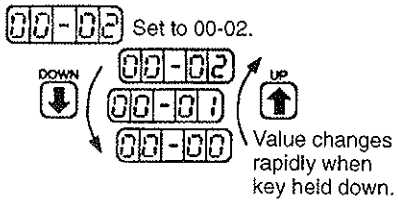

5) Press MODE/SET to clear the alarm trace-back data.





6) Press DATA to return to the user constant data display.




3.2.5 Checking Motor Type

Set Cn-00 to 00-04 to select the motor-type check mode.
This mode is used for maintenance and is not normally used by the customer.

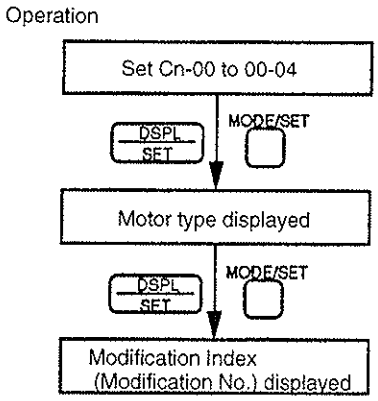

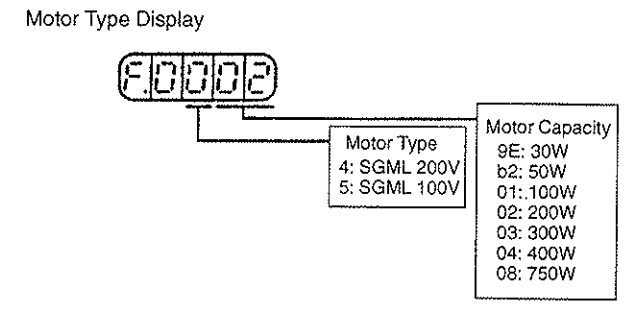


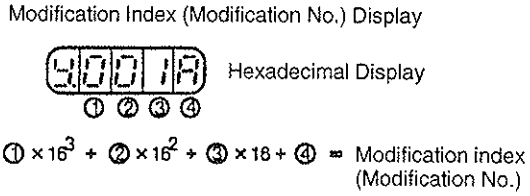

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3.2.6 Checking Software Version

1) Set Cn-00 to 00-06 to select the software-version check mode.
This mode is used for maintenance and is not normally used by the customer.

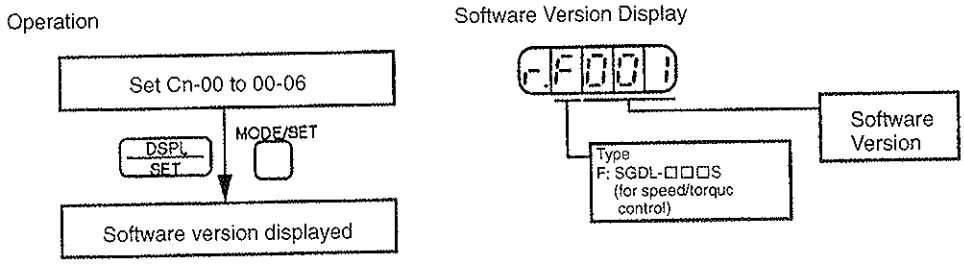


3.2.7 Speed Reference Offset Automatic Adjustment

1) Why Does Reference Offset Occur?
Using a speed/torque control (SGDL-□□□S) type, the motor may rotate slowly when the reference voltage is intended to be 0 V.
This occurs when the host controller or external circuit has a small offset (measured in mV) in the reference voltage.

Automatic Adjustment of Reference Voltage
The reference offset automatic adjustment mode automatically measures the offset and adjusts the reference voltage. It adjusts both speed and torque references.

The following diagram illustrates automatic adjustment of an offset in the reference voltage from the host controller or external circuit.

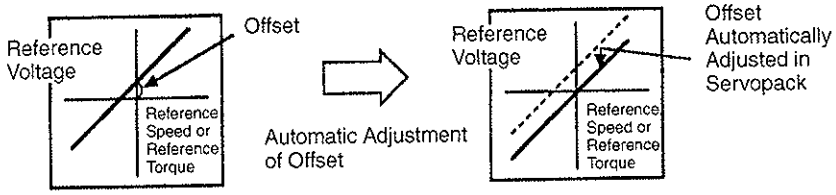


2) After completion of offset automatic adjustment, the amount of offset is stored in the Servopack.
The amount of offset can be checked in the speed reference offset manual adjustment mode. Refer to sub-section 3.2.8 for details.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3) Using the Reference Offset Automatic Adjustment Mode


Follow the procedure below to automatically adjust the reference offset.



JUSP-OP02A-1

For JUSP-OP02A-1


1) Follow the procedure below to set the motor into operating mode.

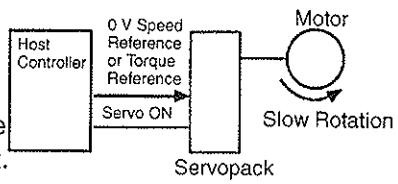


(1) Input the (intended) 0 V reference voltage from the host controller or external circuit.

(2) Then, turn ON the servo ON (CN1-14, $\overline{\text{S-ON}}$) signal.

2) Press DSPL SET to select the user constant setting mode.

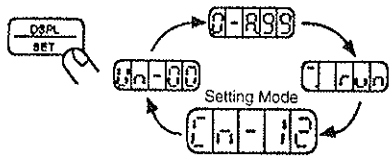


3) Select the user constant number Cn-00. (User constant Cn-00 is selected when the power is turned ON.)

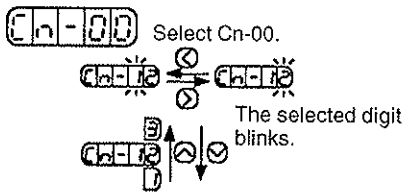


Press the ◁ and ▷ keys to select the digit.

Press the △ and ▽ keys to change the value.


4) Press DATA ENTER to display the current data for the user constant Cn-00.




5) Press the ▽ and △ keys to change the data to 01.

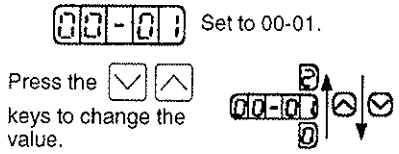


6) Press DSPL SET to automatically adjust the reference offset. The motor rotation stops.

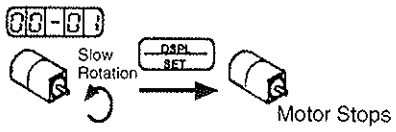

7) Press DATA ENTER to return to the setting mode display. This ends reference offset automatic adjustment.




Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


JUSP-OP03A

For JUSP-OP03A


1) Follow the procedure below to set the motor into operating mode.

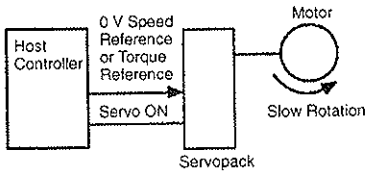


(1) Input the (intended) 0V reference voltage from the host controller or external circuit.

(2)Then, turn ON the servo ON (CN1-14, $\overline{\text{S-ON}}$) signal.


2) Press MODE/SET to select the user constant setting mode.

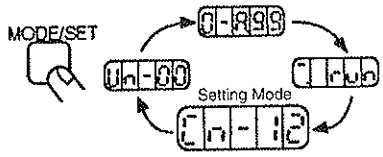


3) Press the UP and DOWN keys to select the user constant number Cn-00.
(User constant Cn-00 is selected when the power is turned ON.)

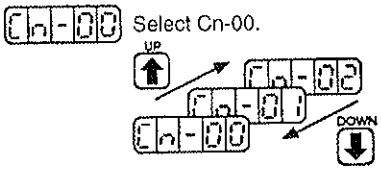


4) Press DATA to display the current data for the user constant Cn-00.




5) Press the UP and DOWN keys to change the data to 01.

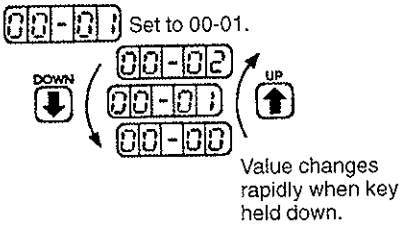

6) Press MODE/SET to automatically adjust the reference offset. The motor rotation stops.

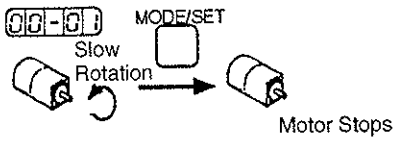

7) Press DATA to return to the setting mode display. This ends reference offset automatic adjustment.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4) **The reference offset automatic adjustment mode cannot be used** where a position loop is formed with the host controller and the error pulses are zeroed when servo lock is stopped.

In this case, use the speed reference offset manual adjustment mode. Refer to sub-section 2.4.3 for details.

Zero-clamp speed control is available to force the motor to stop during zero speed reference. Refer to sub-section 2.4.3 for details.

3.2.8 Speed Reference Offset Manual Adjustment Mode


1) Speed reference offset manual adjustment is very convenient in the following situations:

- If a position loop is formed with the host controller and the error pulses are zeroed when servo lock is stopped.

- To deliberately set the offset to some value.


This mode can also be used to check the data set in the reference offset automatic adjustment mode.
In principle, this mode operates in the same way as the reference offset automatic adjustment mode, except that the amount of offset is directly input during the adjustment.
The offset can be set for speed references only.

Offset Adjustment Range and Setting Units are as follows:

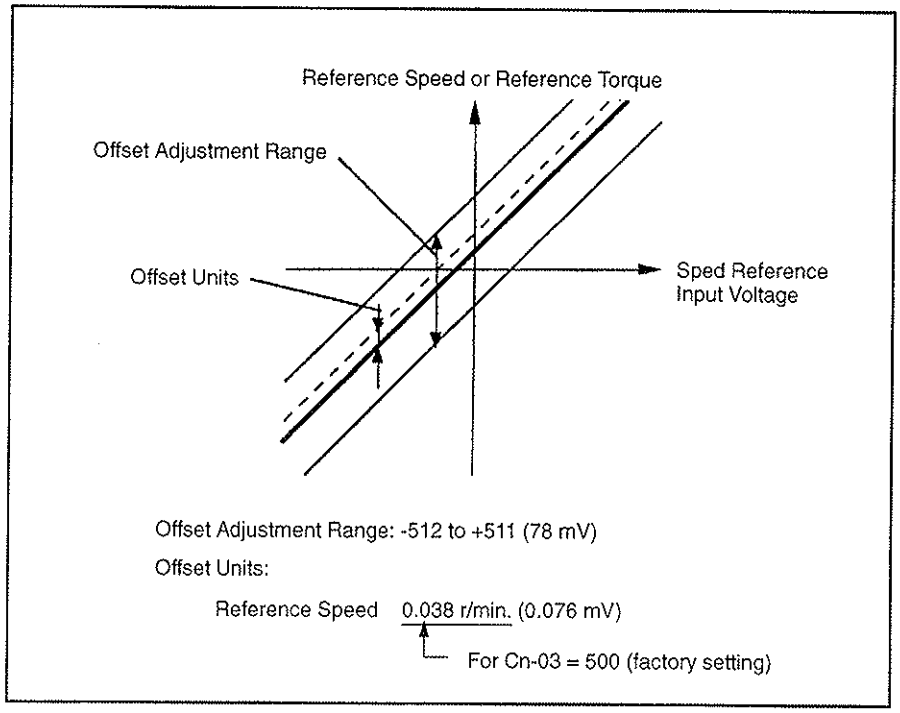

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


2) Follow the procedure below to manually adjust the reference voltage.



JUSP-OP02A-1

For JUSP-OP02A-1


1) Press DSPL SET to select the user constant setting mode.

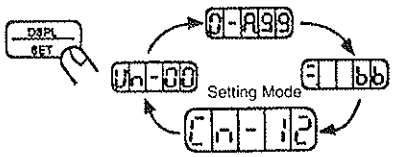

2) Select the user constant number Cn-00. (User constant Cn-00 is selected when the power is turned ON.)

Press the ◁ and ▷ keys to select the digit.


Press ▽ and △ keys to change the value.

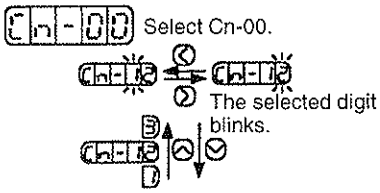

3) Press DATA ENTER to display the current data for the user constant Cn-00.




4) Press the ▽ and △ keys to change the data to 03.

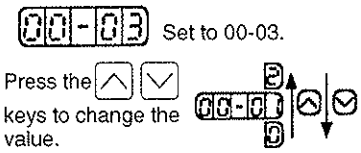


5) Press DSPL SET to select the speed reference offset manual adjustment mode.

(The amount of speed reference offset is displayed.)

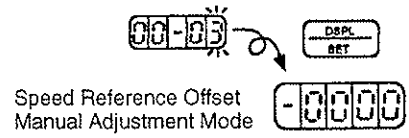


6) Press the ▽ and △ keys to adjust the amount of offset.

(Adjust the speed references.)




7) Press DSPL SET to return to the user constant data display.

8) Press DATA ENTER to return to the setting mode display. This ends the reference offset manual adjustment.




Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3.2.8 Speed Reference Offset Manual Adjustment Mode cont.



JUSP-OP03A

For JUSP-OP03A


1) Press MODE/SET to select the user constant setting mode.

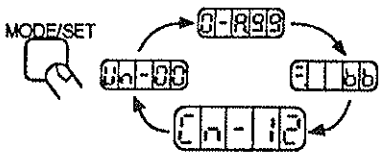


2) Press the UP and DOWN keys to select the user constant number Cn-00.
(User constant Cn-00 is selected when the power is turned ON.)

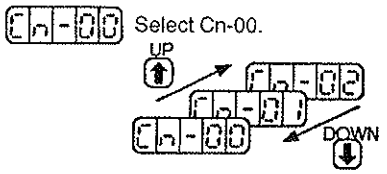


3) Press DATA to display the current data for the user constant Cn-00.




4) Press the UP and DOWN keys to change the data to 03.

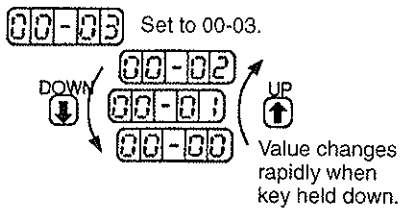


5) Press MODE/SET to select the speed reference offset manual adjustment mode.
(The amount of speed reference offset is displayed.)

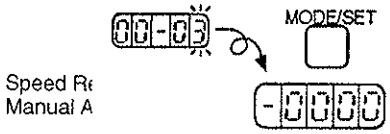


6) Press the UP and DOWN keys to adjust the amount of offset.
(Adjust the speed references.)



7) Press MODE/SET to return to the user constant data display.



8) Press DATA to return to the setting mode display. This ends the reference offset manual adjustment.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

SERVO SELECTION AND DATA SHEETS

4

This chapter describes how to select Σ-L Series servo drives and peripheral devices.
The section also presents the specifications and dimensional drawings required for selection and design.
Choose and carefully read the relevant sections of this chapter.

4.1 Selecting a Σ-L Series Servo 131
4.1.1 Selecting a Servomotor 131
4.1.2 Selecting a Servopack 142
4.1.3 Selecting a Digital Operator 144

4.2 SGML Servomotor 145
4.2.1 Ratings and Specifications 145
4.2.2 Mechanical Characteristics 154

4.3 Servopack Ratings and Specifications 156
4.3.1 Ratings and Specifications 156
4.3.2 Overload Characteristics 159
4.3.3 Starting Time and Stopping Time 160
4.3.4 Load Inertia 160
4.3.5 Overhanging Loads 162
4.3.6 Power Consumption 163

4.4 Σ-L Series Dimensional Drawings 164
4.4.1 Servomotor Dimensional Drawings 164
4.4.2 Servopack Dimensional Drawings 178
4.4.3 Digital Operator Dimensional Drawings 181

4.5 Selecting Peripheral Devices 182
4.5.1 Selecting Peripheral Devices 182

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.6 Specifications and Dimensional Drawings of Peripheral Devices 187

4.6.1 Cable Specifications and Peripheral Devices 187
4.6.2 Motor Cables 190
4.6.3 Connector Kits 193
4.6.4 Brake Power Supply 197
4.6.5 Encoder Cables 199
4.6.6 CN1 Connector 203
4.6.7 Connector Terminal Block Converter Unit 205
4.6.8 Cable With CN1 Connector and One End Without Connector 207
4.6.9 Circuit Breaker 207
4.6.10 Noise Filter 208
4.6.11 Magnetic Contactor 209
4.6.12 Surge Suppressor 210
4.6.13 Regenerative Unit 211
4.6.14 Cables for Connecting PC and Servopack 213

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.1 Selecting a Σ-L Series Servo

This section describes how to select the Σ-L Series Servomotor, Servopack, and Digital Operator.

4.1.1 Selecting a Servomotor 131
4.1.2 Selecting a Servopack 142
4.1.3 Selecting a Digital Operator 144


4.1.1 Selecting a Servomotor

1) The selection of SGML Servomotor matched to the servo system in which it is used is based on the servomotor type, that is, the seven alphanumeric characters after "SGML-", described below. The numbers (1) to (6) below correspond to the numbers in the flowchart for Servomotor selection on the following pages.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

■ Model Numbers for Standard Servomotors

SGML- 01 A F 1 2 □



SGML type

Σ-L Series
SGML: SGML Servomotor

1) Rated output (motor capacity)
A3: 30W (0.04HP) A5: 50W (0.07HP)
01: 100W (0.13HP) 02: 200W (0.27HP)
03: 300W (0.40HP) 04: 400W (0.53HP)
08: 750W (1.01HP)

2) Supply voltage
A: 200V B: 100V

3) Encoder specification
F: 1024 P/R incremental encoder

4) Design revision order

5) Shaft specification
2: Straight without key
3: Flat key seat
4: Straight with key

6) Options
Blank: Standard (W/O brake)
B: With brake (90VDC)
C: With brake (24VDC)


Flowchart for Servomotor selection

	Selected motor type
Example	SGML - 0 2 B F 1 4 B
Axis 1	SGML - □ □ □ □ □ □ □
Axis 2	SGML - □ □ □ □ □ □ □
• • •	• • • • • •

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


2) The actual selection of the SGML Servomotor is conducted according to the flowchart in the next page.

Flowchart for Servomotor Selection

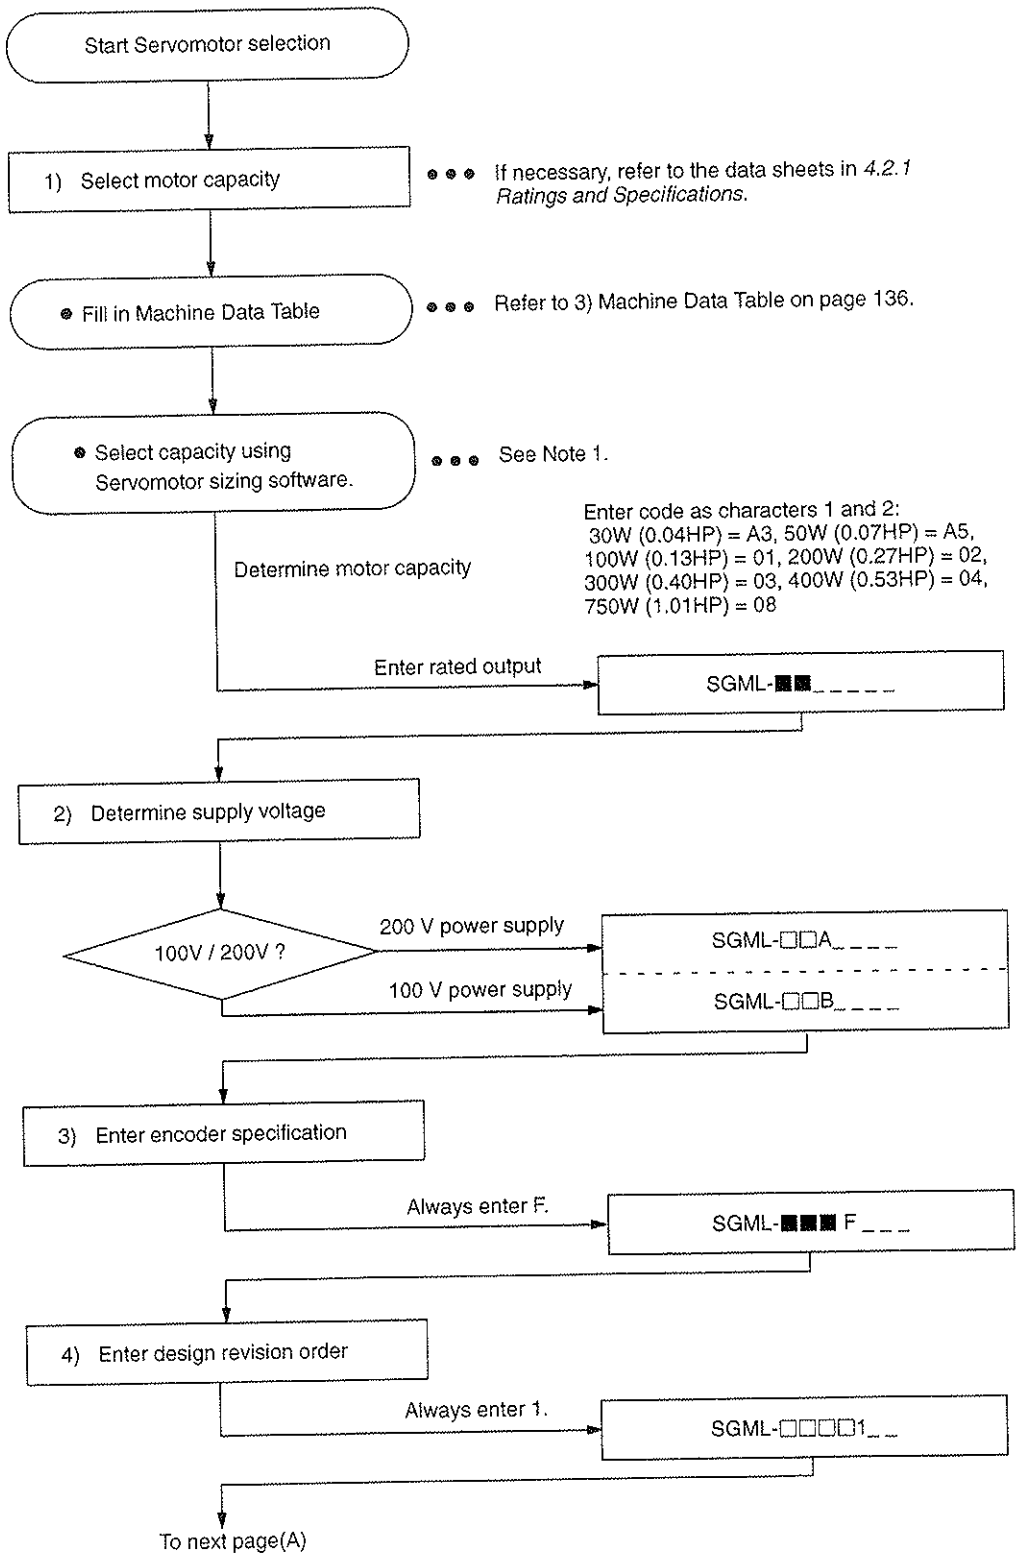

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.1.1 Selecting a Servomotor cont.

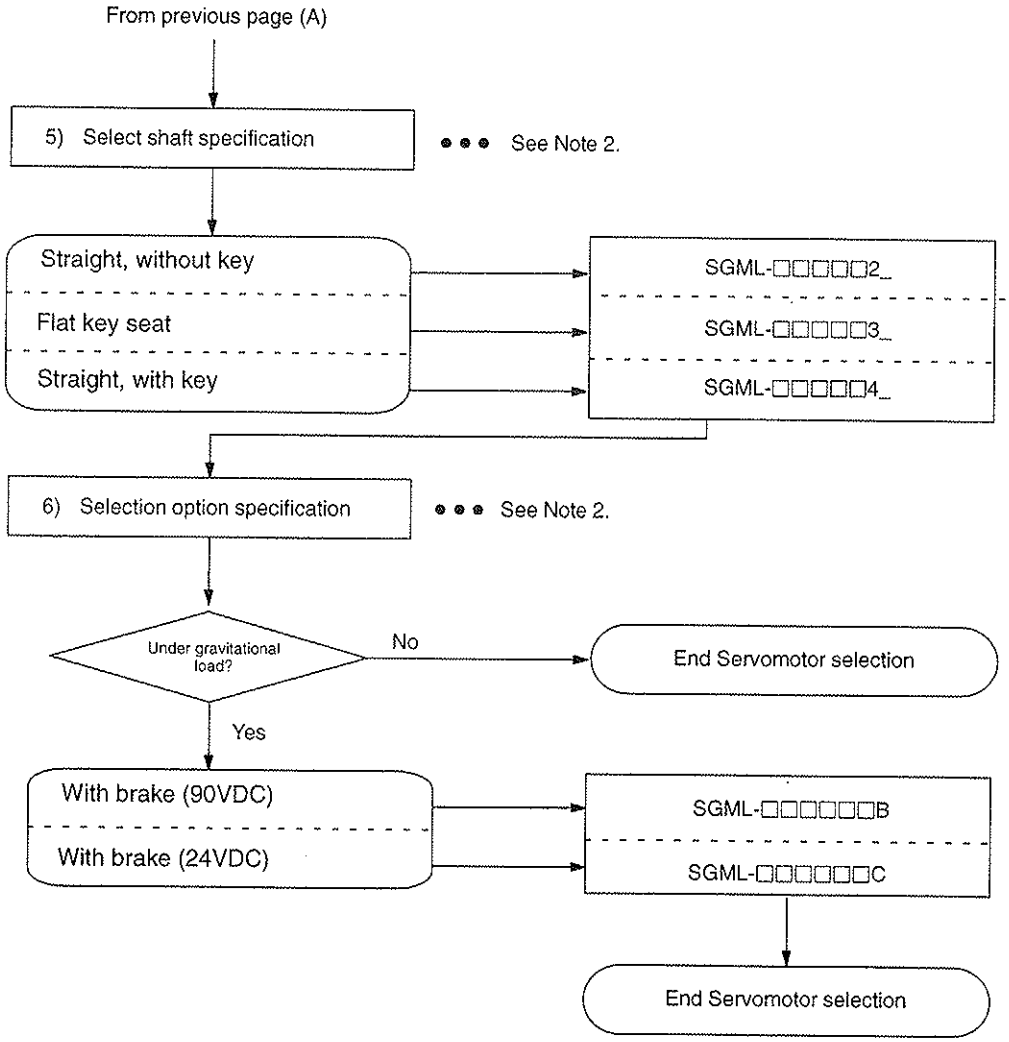

Note 1 Contact your Yaskawa representative for sizing or sizing software.

2 Some options are not available according to the rated output. Confirm the options available by the Table on the next page.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


	Power Supply		Shaft Specifications			Brake 90 VDC	Brake 24 VDC
	100V	200V	Straight, W/O Key	Flat Key Seat	Straight, W/ Key		
30W (0.04HP)	○	○	○	○	×	○	○
50W (0.07HP)	○	○	○	○	×	○	○
100W (0.13HP)	○	○	○	○	×	○	○
200W (0.27HP)	○	○	○	○	○	○	○
300W (0.40HP)	○	×	○	○	○	○	○
400W (0.53HP)	×	○	○	○	○	○	○
750W (1.01HP)	×	○	○	○	○	○	○

○: Available ×: Not available

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

■ Model Numbers for Servomotors with Gears

SGML- 01 A F J 1 6 □



SGML type
with gears

Σ-L Series
SGML: SGML Servomotor

1) Rated output (motor capacity)
A3: 30W (0.04HP) A5: 50W (0.07HP)
01: 100W (0.13HP) 02: 200W (0.27HP)
03: 300W (0.40HP) 04: 400W (0.53HP)
08: 750W (1.01HP)

2) Supply voltage
A: 200V B: 100V

3) Encoder specification
F: 1024 P/R incremental encoder

4) Gear type
J: Standard backlash gear

5) Gear ratio
1: 1/5 2: 3/31 3: 1/21 4: 1/33

6) Shaft end specification for standard backlash gears
2: Straight
6: Straight with key and tap

7) Options
Blank: Standard (W/O brake)
B: With brake (90VDC)
C: With brake (24VDC)


Flowchart for Servomotor selection

	Selected motor type
Example	SGML [0][2][B][F][J][1][6][B]
Axis 1	SGML - [ ][ ][ ][ ][ ][ ][ ][ ]
Axis 2	SGML - [ ][ ][ ][ ][ ][ ][ ][ ]
• • •	• • • • • • •


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3) The actual selection of the SGML Servomotor with standard backlash gears is conducted according to the flowchart in the next page.

Flowchart for Servomotor Selection

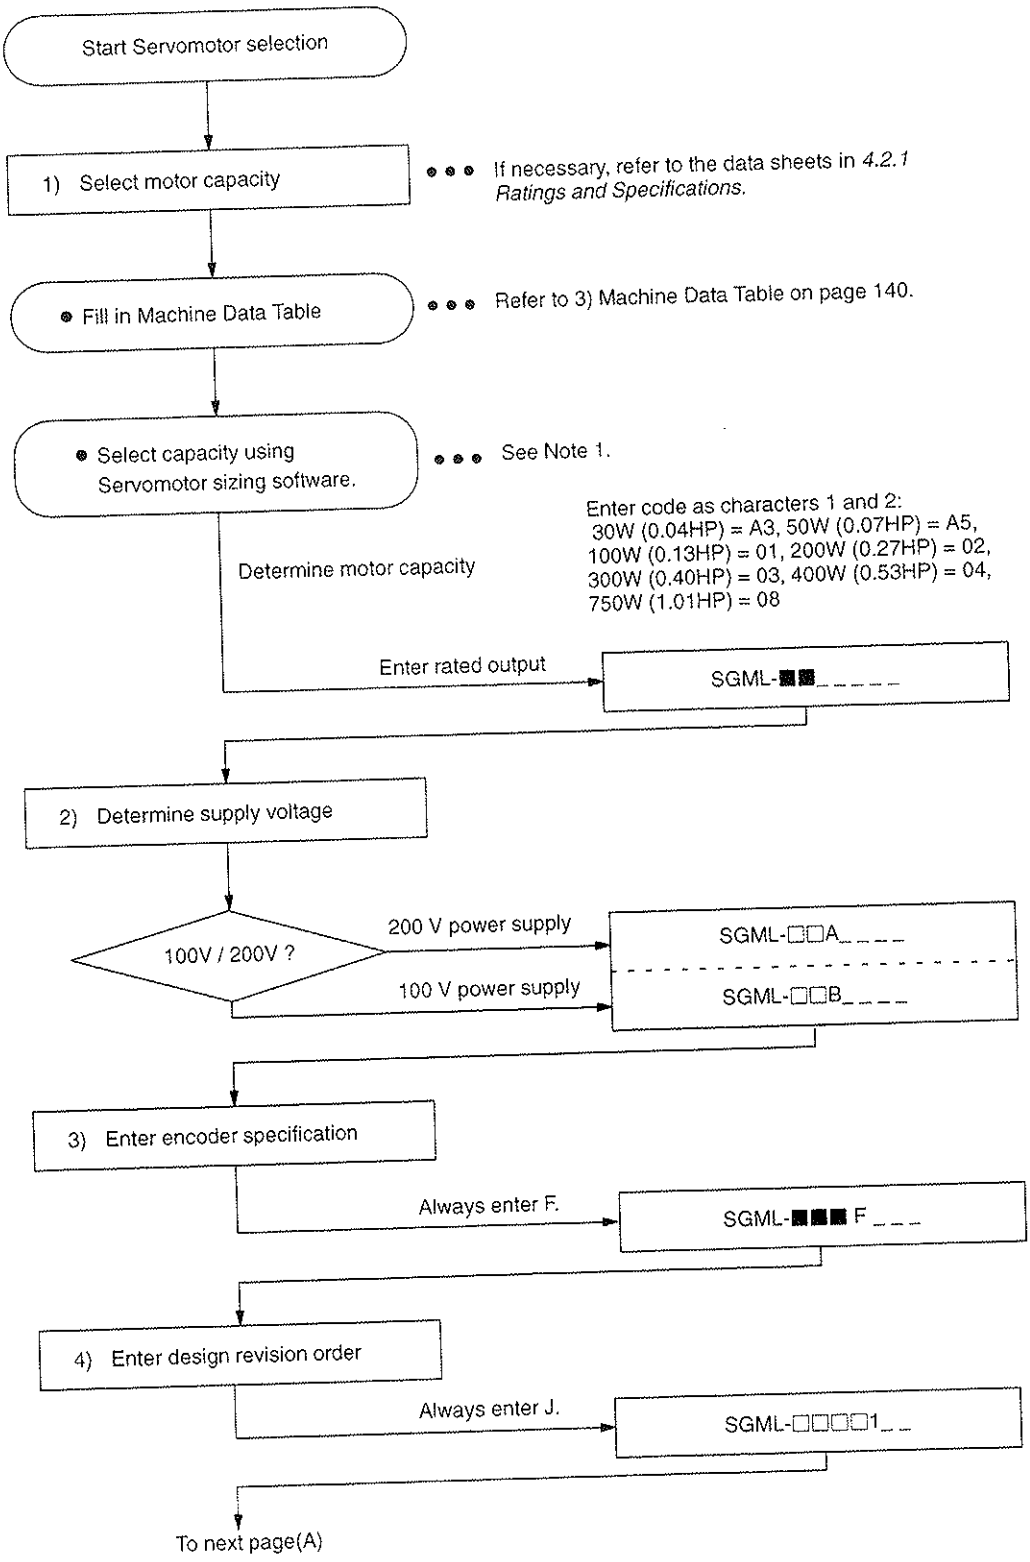

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

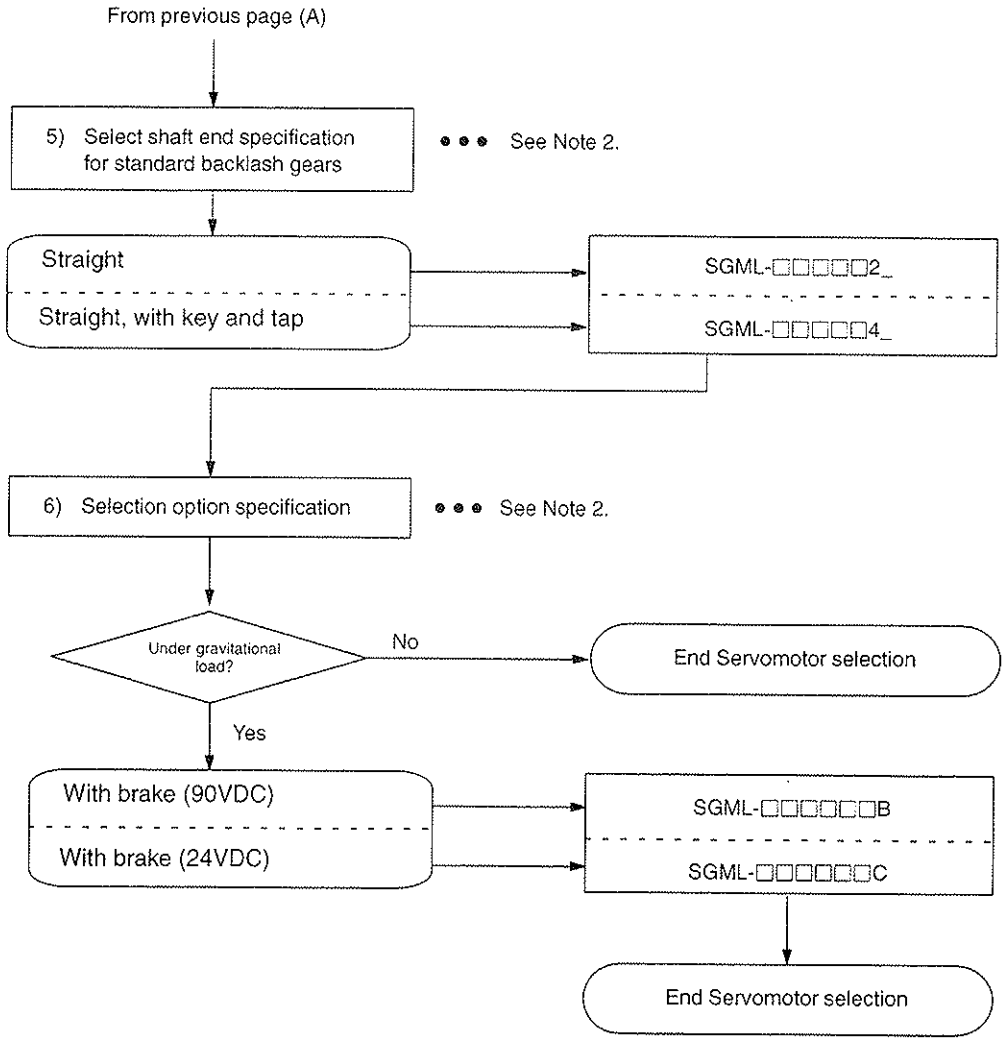

Note 1 Contact your Yaskawa representative for sizing or sizing software.

2 Some options are not available according to the rated output. Confirm the options available by the Table on the next page.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

	Power Supply		Shaft Specifications			Brake 90 VDC	Brake 24 VDC
	100V	200V	Straight, W/O Key	Flat Key Seat	Straight, W/ Key		
30W (0.04HP)	○	○	○	○	×	○	○
50W (0.07HP)	○	○	○	○	×	○	○
100W (0.13HP)	○	○	○	○	×	○	○
200W (0.27HP)	○	○	○	○	○	○	○
300W (0.40HP)	○	×	○	○	○	○	○
400W (0.53HP)	×	○	○	○	○	○	○
750W (1.01HP)	×	○	○	○	○	○	○

○: Available ×: Not available


4


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


4) Machine Data Table


Fill out the machine data table below as an aid to selecting the drive system. When the machine data table is complete, use the servomotor sizing software to select the motor capacity.

1) Ball Screw Horizontal Axis		
Load mass	W	—kg (lb)
Thrust	F	—kg (lb)
Coefficient of friction	μ	—
Overall efficiency	η	—
Gear ratio	R (= Nm/Nl)	—
Gear+coupling	GD^2g	—kg·cm² (lb·in².)
Ball screw pitch	P	—mm (in.)
Ball screw diameter	D	—mm (in.)
Ball screw length	L	—mm (in.)
2) Ball Screw Vertical Axis		
Load mass	W_1	—kg (lb)
Counterweight	W_2	—kg (lb)
Coefficient of friction	μ	—
Overall efficiency	η	—
Gear ratio	R (= Nm/Nl)	—
Gear+coupling	GD^2g	—kg·cm² (lb·in².)
Ball screw pitch	P	—mm (in.)
Ball screw diameter	D	—mm (in.)
Ball screw length	L	—mm (in.)
3) Timing Belt		
Load mass	W	—kg (lb)
Thrust	F	—kg (lb)
Coefficient of friction	μ	—
Overall efficiency	η	—
Gear ratio	R (= Nm/Nl)	—
Gear+coupling	GD^2g	—kg·cm² (lb·in².)
Pulley	GD^2d	—kg·cm² (lb·in².)
Pulley diameter	D	—mm (in.)
4) Rack and Pinion		
Load mass	W	—kg (lb)
Thrust	F	—kg (lb)
Coefficient of friction	μ	—
Overall efficiency	η	—
Gear ratio	R (= Nm/Nl)	—
Gear+coupling	GD^2g	—kg·cm² (lb·in².)
Pinion diameter	D	—mm (in.)
Pinion thickness	t	—mm (in.)

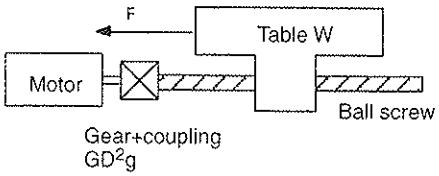




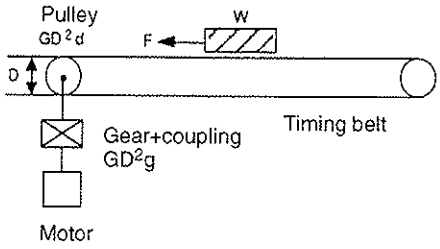

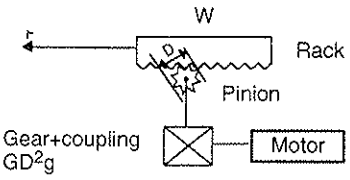


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

5) Roll Feeder		
Load GD^2	$GD^2\ell$	——kg·cm² (lb·in².)
Tension	F	——kg (lb)
Press force	P	——kg (lb)
Roller diameter	D	——mm (in.)
Coefficient of friction	μ	——
Overall efficiency	η	——
Gear ratio	R (= Nm/Nl)	——
Gear+coupling	GD^2g	——kg·cm² (lb·in².)

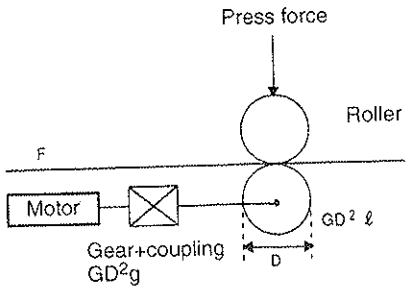


6) Rotor		
Load GD^2	$GD^2\ell$	——kg·cm² (lb·in².)
Load torque	$T\ell$	——kg·cm² (lb·in².)
Overall efficiency	η	——
Gear ratio	R (= Nm/Nl)	——
Gear+coupling	GD^2g	——kg·cm² (lb·in².)

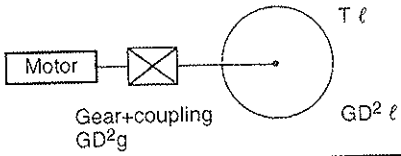

7) Others		
Load GD^2	$GD^2\ell$	——kg·cm² (lb·in².)
Load torque	$T\ell$	——kg·cm² (lb·in².)
Motor speed	Nm	——r/min
DUTY	td	——s
Positioning time	ts	——s
Accel/decel time	ta	——s

• Duty cycle		
DUTY	td	——s
Positioning distance	Ls	——mm (in.)
Moving member speed	$V\ell$	——m/min
Positioning time	ts	——s
Accel/decel time	ta	——s

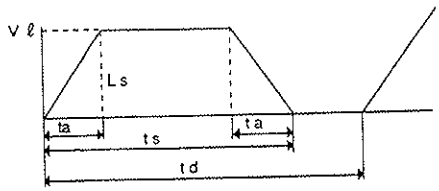

Enter either $V\ell$ or ts. If both are entered, specify priority.


• Operating environment	Operating temperature
	Others

4

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.1.2 Selecting a Servopack

1) The selection of an SGDL Servopack matched to the servo system in which it is used is based on the Servopack type, that is, the four alphanumeric characters after "SGDL-", described below.
The numbers (1) to (3) below correspond to the numbers in the flowchart for Servopack selection on the following pages.

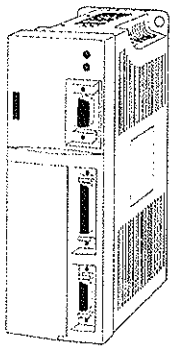

SGDL- 01 A S

Σ-L Series
SGDL: SGDL Servopack

1) Rated output
A3: 30W (0.04HP) A5: 50W (0.07HP)
01: 100W (0.13HP) 02: 200W (0.27HP)
03: 300W (0.40HP) 04: 400W (0.53HP)
08: 750W (1.01HP)

2) Supply voltage
A: 200V B: 100V

3) Model
S: For speed/torque control


Flowchart for Servopack selection

	Selected Servopack type
Example	SGDL - 01 2 B S
Axis 1	SGDL - □ □ □ □
Axis 2	SGDL - □ □ □ □
• • •	• • • • • •

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2) The actual selection of the SGDL Servopack is conducted according to the following flowchart.


Flowchart for Servopack Selection

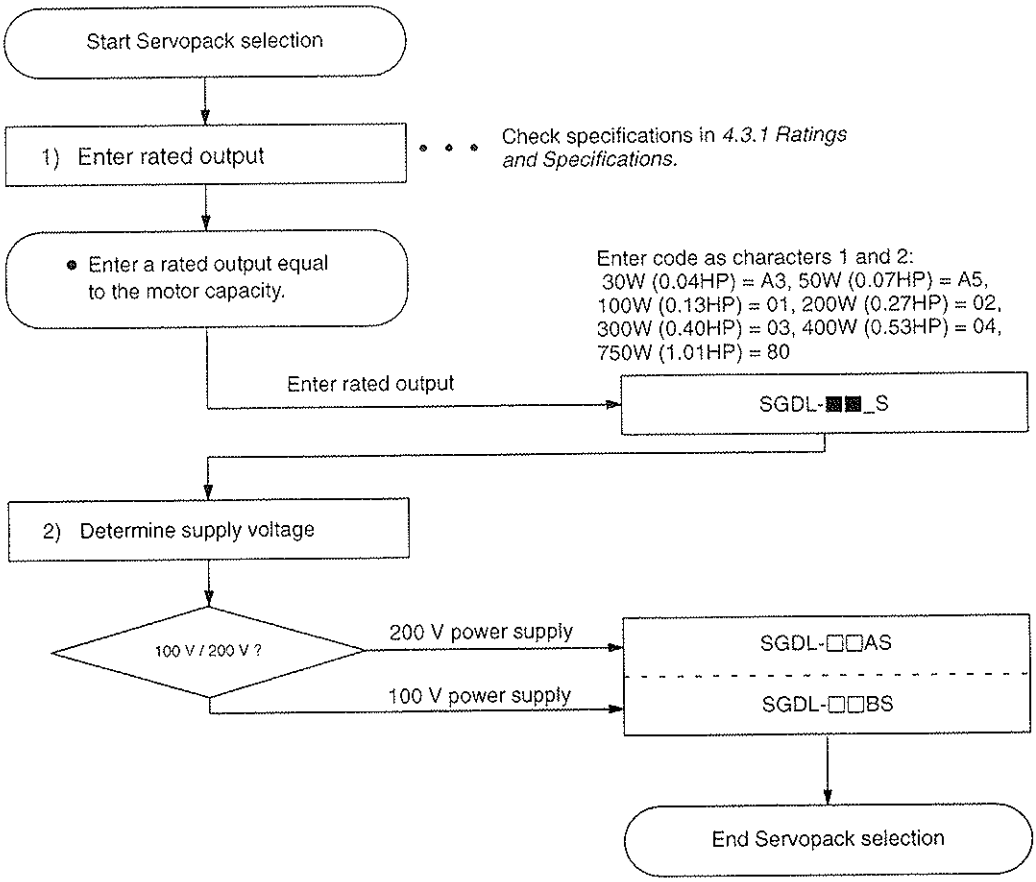

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


4.1.3 Selecting a Digital Operator

1) The following two types of Digital Operator are available.
The two types cannot be used simultaneously. However, it is convenient to prepare both types and use whichever suits the circumstances.
Each type differs in shape but the operating functions are identical.



JUSP-OP03A (Mount Type)

- Use attached to the top of the Servopack front face.

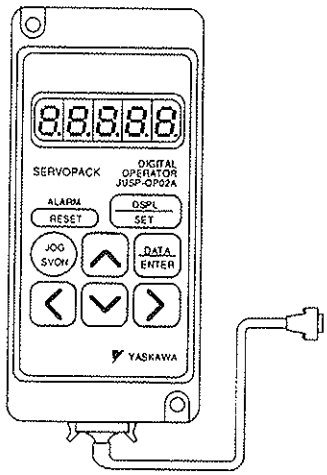


JUSP-OP02A-1 (Hand-held Type)

- Use held in the hand while connected with the 1 m cable supplied.

2) The Digital Operator is selected according to the flowchart below.

Flowchart for Digital Operator Selection

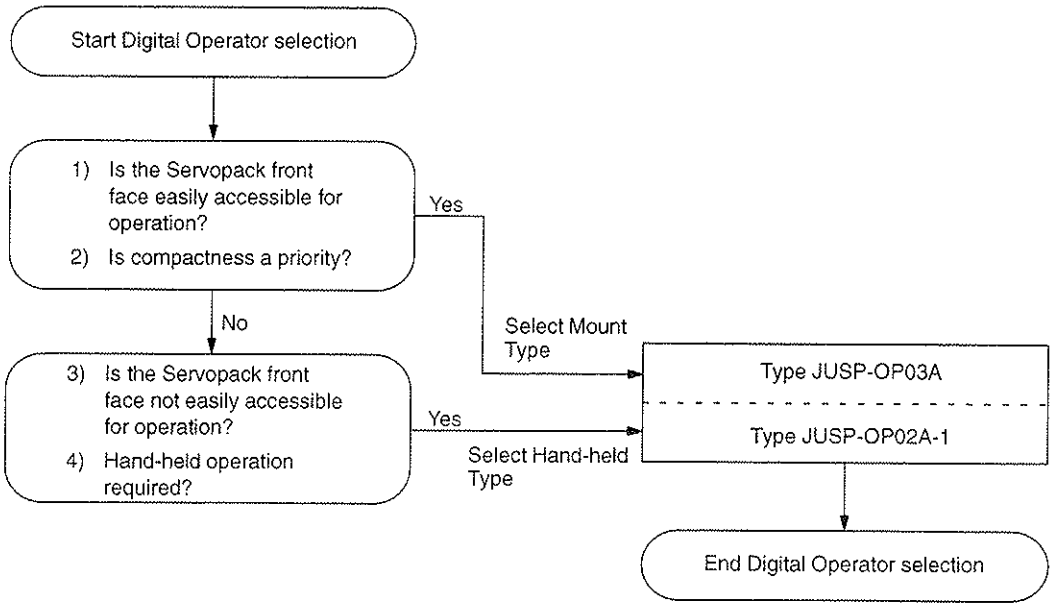

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.2 SGML Servomotor

This section presents tables of ratings and specifications for SGML Servomotor. Refer to these tables when selecting a Servomotor.

4.2.1 Ratings and Specifications 145
4.2.2 Mechanical Characteristics 154

4.2.1 Ratings and Specifications

1) Ratings and Specifications of 200-VAC Standard SGML Servomotors

Time rating:	continuous
Heat resistance class:	Class B
Vibration class:	15μm or below
Withstand voltage:	1500 VAC
Insulation resistance:	500 VDC 10MΩ min.
Enclosure:	totally enclosed, self-cooled
Ambient temperature:	0 to 40°C
Ambient humidity:	20% to 80% (non-condensing)
Excitation:	permanent magnet
Drive method:	direct drive
Mounting:	flange method

SGML Servomotor		A3A	A5A	01A	02A	04A	08A
Rated Output*1	W (HP)	30 (0.04)	50 (0.07)	100 (0.13)	200 (0.27)	400 (0.53)	750 (1.01)
Rated Torque*1 *2	N·m	0.095	0.159	0.318	0.637	1.27	2.39
	(oz·in)	(13.5)	(22.6)	(45.1)	(90.1)	(181)	(338)
Instantaneous Peak Torque*1	N·m	0.29	0.48	0.96	1.91	3.82	7.1
	(oz·in)	(40.5)	(67.7)	(135)	(270)	(542)	(1010)
Rated Curent*1	A (rms)	0.42	0.6	0.87	2.0	2.6	4.4
Instantaneous Max Current*1	A (rms)	1.3	1.9	2.8	6.0	8.0	13.9
Rated Speed*1	r/min	3000					
Instantaneous Max Speed*1	r/min	4500					
Torque Constant*1	N·m/A (rms)	0.255	0.286	0.408	0.355	0.533	0.590
	(oz·in/A) (rms)	(36.2)	(40.5)	(57.8)	(50.2)	(75.5)	(83.5)
Moment of Inertia [J_M]	$kg·m^2 \times 10^{-4}$	0.021	0.026	0.040	0.123	0.191	0.671
	$(oz·in·s^2 \times 10^{-3})$	(0.288)	(0.368)	(0.576)	(1.74)	(2.70)	(9.52)
Rated Power Rate*1	kW/s	4.36	9.63	25.4	32.8	84.6	85.1
Rated Angular Acceleration*1	rad/s^2	45200	61200	79500	51800	666000	35600
Inertia Time Constant	ms	1.5	0.9	0.5	0.4	0.3	0.3
Inductive Time Constant	ms	1.5	1.8	1.9	5.4	6.4	13

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.2.1 Ratings and Specifications cont.

*1 These items and torque-motor speed characteristics quoted in combination with an SGDL Servopack at an armature winding temperature of 100°C. Other values quoted at 20°C. All values typical.

*2 Rated torques are continuous allowable torque values at 40°C with a 250 x 250 x 6 (mm) (9.84 x 9.84 x 0.24 (in.)) heat sink attached.

NOTE The ratings and specifications above refer to a standard Servomotor.

Add the numerical values below to the moment of inertia values in the table for a motor fitted with a holding brake.


Other specifications will also change slightly.

Item \ Type		SGML-					
		A3A	A5A	01A	02A	04A	08A
Holding brake	$kg \cdot m^2 \times 10^{-4}$	0.0085			0.058		0.14
	$(oz \cdot in \cdot s^2 \times 10^{-3})$	(0.120)			(0.816)		(1.98)


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

■ 200-VAC Standard SGML Servomotor Torque-Motor Speed Characteristics


• SGML-A3A

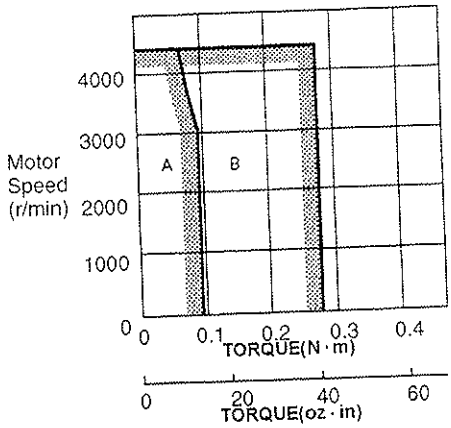


• SGML-A5A

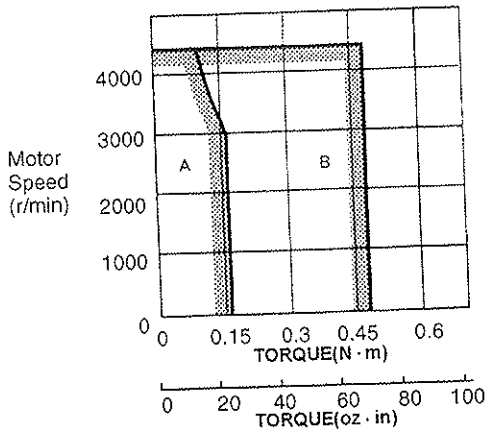


• SGML-01A

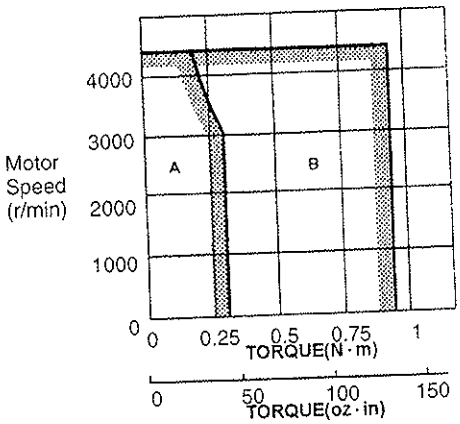


• SGML-02A

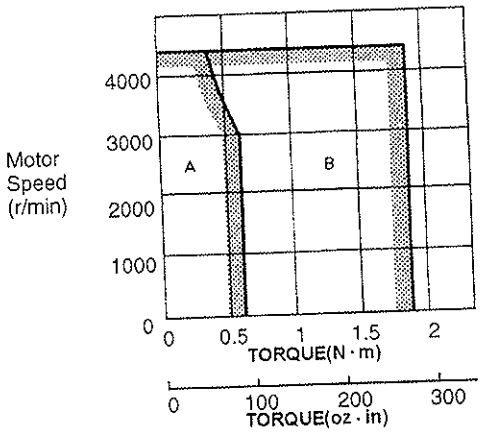

• SGML-04A

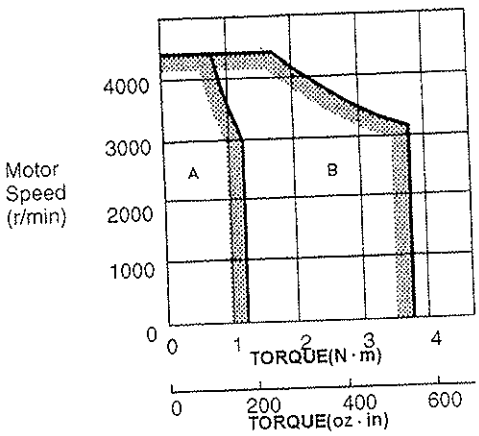

• SGML-08A

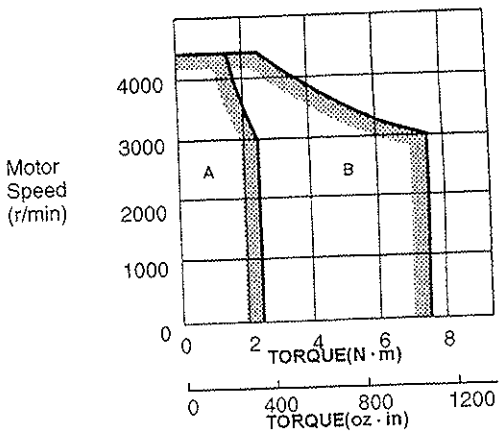

A: Continuous Duty Zone
B: Intermittent Duty Zone

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2) Ratings and Specifications of 100-VAC Standard SGML Servomotors

Time rating:	continuous
Heat resistance class:	Class B
Vibration class:	15μm or below
Withstand voltage:	1500 VAC
Insulation resistance:	500 VDC 10MΩ min.
Enclosure:	totally enclosed, self-cooled
Ambient temperature:	0 to 40°C
Ambient humidity:	20% to 80% (non-condensing)
Excitation:	permanent magnet
Drive method:	direct drive
Mounting:	flange method

SGML Servomotor		A3B	A5B	01B	02B	03B
Rated Output *1	W (HP)	30 (0.04)	50 (0.07)	100 (0.13)	200 (0.27)	300 (0.40)
Rated Torque *1 *2	N·m	0.095	0.159	0.318	0.637	0.95
	(oz·in)	(13.5)	(22.6)	(45.1)	(90.1)	(135.0)
Instantaneous Peak Torque *1	N·m	0.29	0.48	0.96	1.91	3.72
	(oz·in)	(40.5)	(67.7)	(135)	(270)	(527.7)
Rated Current *1	A (rms)	0.63	0.9	2.2	2.7	3.7
Instantaneous Peak Current *1	A (rms)	2.0	2.9	7.1	8.4	14.8
Rated Rotation Speed *1	r/min	3000				
Max. Rotation Speed *1	r/min	4500				
Torque Constant *1	N·m/A (rms)	0.168	0.194	0.156	0.255	0.279
	oz·in/A (rms)	(23.8)	(27.5)	(22.1)	(36.1)	(39.6)
Moment of Inertia	(=GD ^{2}M/4) kg·m^2	0.021 ×10^{-4}	0.026 ×10^{-4}	0.040 ×10^{-4}	0.123 ×10^{-4}	0.191 ×10^{-4}
	(oz·in·s^2×10^{-3})	(0.288)	(0.368)	(0.576)	(1.74)	(2.71)
Rated Power Rating *1	kW/S	4.36	9.63	25.4	32.8	47.3
Rated Angular Acceleration *1	rad/s^2	45200	61200	79500	51800	49700
Inertia Time Constant	ms	1.6	0.9	0.6	0.4	0.3
Inductive Time Constant	ms	1.3	1.6	1.6	5.7	5.3

*1 These items and torque-motor speed characteristics quoted in combination with an SGDL Servopack at an armature winding temperature of 100°C. Other values quoted at 20°C. All values typical.

*2 Rated torques are continuous allowable torque values at 40°C with a 250 x 250 x 6 (mm) (9.84 x 9.84 x 0.24 (in.)) heat sink attached.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

NOTE The ratings and specifications above refer to a standard Servomotor.

Add the numerical values below to the moment of inertia values in the table for a motor fitted with a holding brake.

Other specifications will also change slightly.


Item \ Type		SGML-				
		A3B	A5B	01B	02B	03B
Holding brake	$kg \cdot m^2 \times 10^{-4}$	0.0085			0.058	
	$(oz \cdot in \cdot s^2 \times 10^{-3})$	0.12			0.82	

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


4.2.1 Ratings and Specifications cont.

■ 100-VAC Standard SGML Servomotor Torque-Motor Speed Characteristics


• SGML-A3B

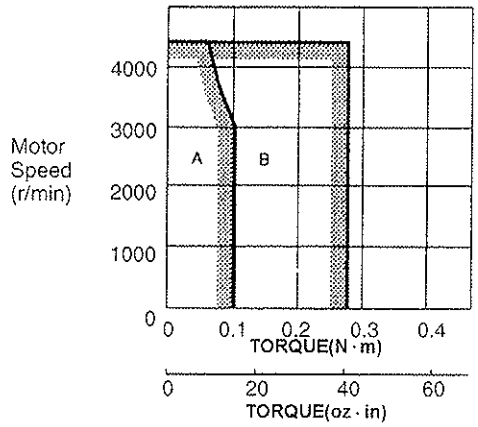


• SGML-A5B

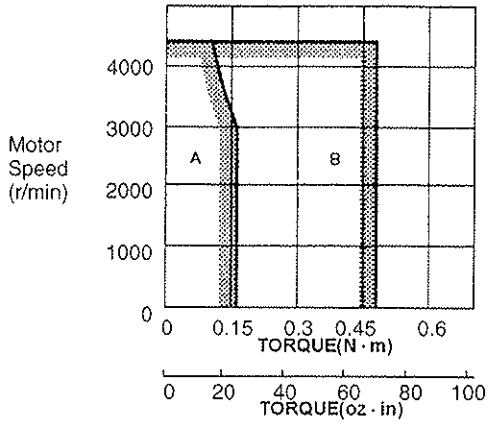


• SGML-01B

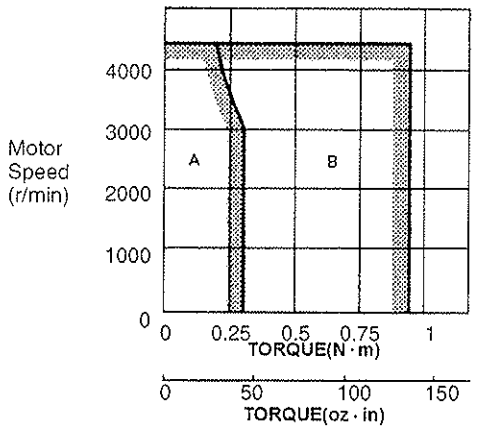

• SGML-02B

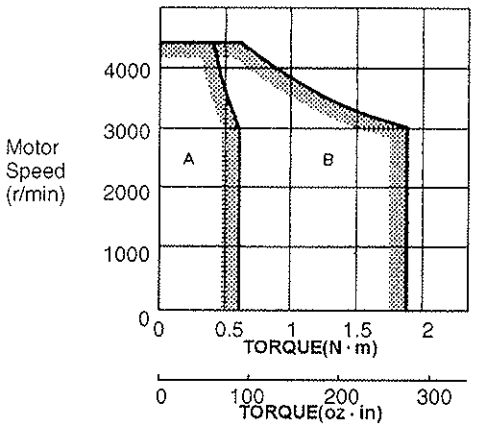

• SGML-03B

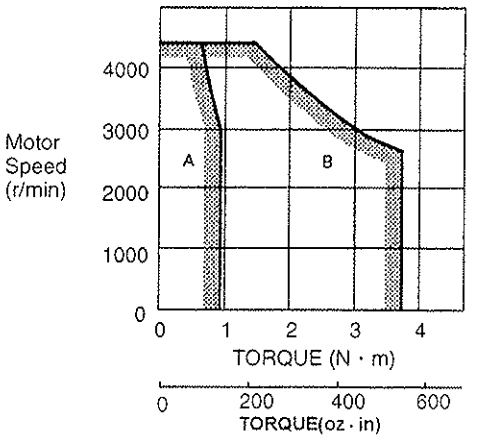

A: Continuous Duty Zone
B: Intermittent Duty Zone

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3) Specifications of SGML Servomotors with Holding Brake

Raings and specifications of Servomotors with **holding brake** are basically the same as those of standard (without holding brake) Servomotors shown in 1) and 2). However, the moment of inertia is as shown below. Other specifications will also change slightly.

Item \ Type		SGML-										
		A3A	A5A	01A	02A	04A	08A	A3B	A5B	01B	02B	03B
Moment of Inertia (W/ brake)	kg·m × 10^{-4}	0.0295	0.0345	0.0485	0.181	0.249	0.811	0.0295	0.0345	0.0485	0.181	0.372
	oz·in·s^2 × 10^{-3}	0.408	0.488	0.696	2.556	3.516	11.5	0.408	0.488	0.696	2.556	3.53


Electrical Specifications of the Holding Brake

Motor Type	Motor Capacity (W)	Holding Brake Specifications					
		Capacity (W)	Holding Torque (Kg-cm)	90VDC		24VDC	
				Coil Resistance Ω (at 20°C)	Rated Current A (at 20°C)	Coil Resistance Ω (at 20°C)	Rated Current A (at 20°C)
SGML-A3□□□□	30	6	2.0	1350	0.067	96	0.25
SGML-A5□□□□	50	6	2.0	1350	0.067	96	0.25
SGML-01□□□□	100	6	3.5	1350	0.067	96	0.25
SGML-02□□□□	200	6.5	15	1246	0.072	89	0.27
SGML-03□□□□	300	6.5	15	1246	0.072	89	0.27
SGML-04□□□□	400	6.5	15	1246	0.072	89	0.27
SGML-08□□□□	750	6	25	1350	0.067	96	0.025

TERMS

Holding Brake

The holding brake is automatically applied to the motor shaft to prevent the load falling in vertical axis applications when the motor power supply is turned off or fails. It is only to hold the load and cannot be used for stopping motor.

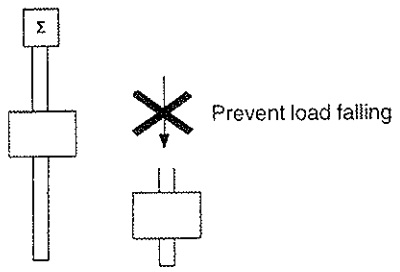

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4) Ratings and Specifications of 200-VAC SGML Servomotors with Standard Backlash Gears

Time rating:	continuous
Heat resistance class:	Class B
Vibration class:	15μm or below
Withstand voltage:	1500 VAC for one minute
Insulation resistance:	500 VDC 10MΩ min.
Enclosure:	totally enclosed, self-cooled
Ambient temperature:	0 to 40°C
Ambient humidity:	20% to 80% (non-condensing)
Excitation:	permanent magnet
Drive method:	direct drive
Mounting:	flange method
Backlash:	15 to 20 min max.
Gear mechanism:	planetary gear mechanism


Motor Type SGML-	Motor			Gear							Moment of Inertia ($=GD^2/4$) kg·m²×10⁻⁴ (lb·in·s²×10⁻³)	Applicable SERVOPACK
	Rated Output W(HP)	Rated Torque N·m (lb·in)	Rated Rotation Speed (r/min)	Type	Gear Ratio	Lost Motion	Rated Torque N·m (lb·in)	Rated Speed (r/min)	Allowable Redial Load Fr (lb)	Allowable Redial Load Fs (lb)		
A3□FJ1□	30 (0.04)	0.095 (0.841)	3000	CP-14	1/5	20	0.24 (2.12)	600	145 (32.6)	125 (28.1)	0.049 (0.043)	SGDE-A3□□
A3□FJ2□					3/31		0.69 (6.11)	290	185 (41.6)		0.037 (0.033)	
A3□FJ3□					1/21		1.6 (14.2)	143			0.028 (0.025)	
A3□FJ4□					1/33		2.51 (22.2)	91			0.026 (0.023)	
A5□FJ1□	50 (0.07)	0.159 (1.41)		CP-14	1/5	20	0.56 (4.96)	600	145 (32.6)	125 (28.1)	0.054 (0.048)	SGDE-A5□□
A5□FJ2□				CP-16	3/31		1.15 (10.2)	290	215 (48.4)	145 (32.6)	0.044 (0.039)	
A5□FJ3□					1/21		2.67 (23.6)	143	230 (51.8)		0.040 (0.035)	
A5□FJ4□					1/33		4.2 (37.2)	91	245 (55.1)		0.036 (0.032)	
01□FJ1□	100 (0.13)	0.318 (2.81)		CP-16	1/5	15	1.27 (11.2)	600	175 (39.4)	145 (32.6)	0.103 (0.091)	SGDE-01□□
01□FJ2□					3/31		2.63 (23.3)	290	215 (48.4)		0.058 (0.051)	
01□FJ3□				CP-20	1/21		5.34 (47.3)	143	455 (102)	235 (52.9)	0.075 (0.066)	
01□FJ4□					1/33		8.4 (74.3)	91	480 (108)		0.061 (0.054)	
02□FJ1□	200 (0.27)	0.637 (5.64)		CP-20	1/5	15	2.55 (22.6)	600	275 (61.9)	235 (52.9)	0.316 (0.280)	SGDE-02□□
02□FJ2□					3/31		5.27 (46.6)	290	360 (81.0)		0.213 (0.189)	
02□FJ3□				CP-25	1/21		10.7 (94.7)	143	585 (132)	290 (65.3)	0.228 (0.202)	
02□FJ4□					1/33		16.8 (149)	91	635 (143)		0.198 (0.175)	
03BFJ1□	300 (0.40)	0.955 (8.45)		CP-20	1/5	15	3.82 (33.8)	600	275 (61.9)	235 (52.9)	0.384 (0.340)	SGDE-03B□
03BFJ2□				CP-25	3/31		7.89 (69.8)	290	460 (104)	290 (65.3)	0.371 (0.328)	
03BFJ3□				CP-32	1/21		16 (142)	143	655 (147)	310 (69.8)	0.421 (0.373)	
03BFJ4□					1/33		25.2 (223)	91	755 (170)		0.356 (0.315)	
04AFJ1□	400 (0.53)	1.27 (11.2)		CP-20	1/5	15	5.08 (45.0)	600	275 (61.9)	235 (52.9)	0.384 (0.340)	SGDE-04A□
04AFJ2□				CP-25	3/31		10.5 (92.9)	290	460 (104)	290 (65.3)	0.371 (0.328)	
04AFJ3□				CP-32	1/21		21.3 (189)	143	655 (147)	310 (69.8)	0.421 (0.373)	
04AFJ4□					1/33		33.5 (296)	91	755 (170)		0.356 (0.315)	
08AFJ1□	750 (1.01)	2.39 (21.2)		CP-25	1/5	15	9.56 (84.6)	600	355 (79.9)	290 (65.3)	1.12 (0.991)	SGDE-08A□
08AFJ2□				CP-32	3/31		19.8 (175)	290	525 (118)	310 (69.8)	1.10 (0.974)	
08AFJ3□				CP-40	1/21		40.2 (356)	143	1070 (241)	490 (110)	1.15 (1.02)	
08AFJ4□					1/33		63.1 (558)	91	1205 (271)		0.971 (0.859)	

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

*1 Maximum motor speed is up to 4000 (r/min) at the shaft.


*2 Gear output torque is expressed using by the following equation.
(Gear output torque) = (Servomotor output torque) × (gear ratio) × (efficiency)
The instantaneous peak torque values indicated with *2 are limited by the gear, so use the following Servomotor instantaneous peak torque. In this case, set torque limit user constants Pn402 and 403 for the Servopack at 250 %.

NOTE Output torque and motor speed produce the following trends in efficiency. Values in the table are at the rated motor torque and rated motor speed (3000 r/min).

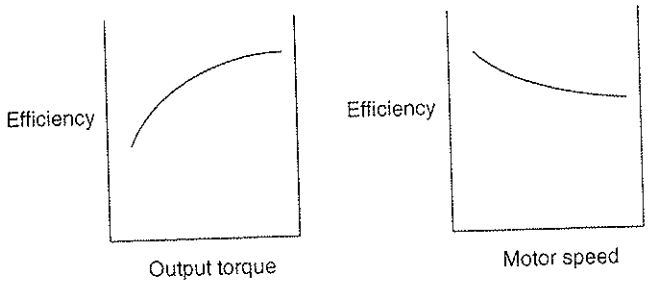

Item	Measurement Method/Definition	Typical Value
Rated Input Motor Speed	–	3000 (r/min)
Max. Allowable Input Motor Speed	–	4000 (r/min)
Rated Torque	The rated output torque of the motor is the gear input torque. The rated torque is this value multiplied by the gear ratio and efficiency.	
Lost Motion *	Angular difference in the screw with a ±5% rated torque load. (Maximum value at any four positions during output.)	3 (arc-min) max.
Torsion Rigidity *	Highest torsion angle value on one side with a ± rated torque load.	10 (arc-min) max.
Angular Transmission Error Accuracy	Difference in absolute accuracy for one rotation under load and no-load conditions durring output.	6 (arc-min) max.

* See the figure below for lost motion and torsion rigidity.

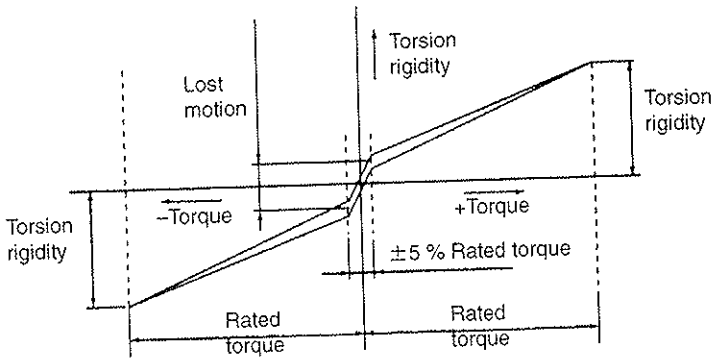

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


4.2.2 Mechanical Characteristics

The tables below show the SGML Servomotor mechanical characteristics other than the ones with standard backlash gears.

1) Allowable Radial Load, Allowable Thrust Load


The output shaft allowable loads for SGML Servomotor are shown below.

Conduct mechanical design such that the thrust loads and radial loads do not exceed the values stated below.

Servomotor Type	Allowable Radial Load Fr [N(lb)]	Allowable Thrust Load Fs [N(lb)]	Reference Diagram
SGML-A3	68 (15)	54 (12)	
SGML-A5	68 (15)	54 (12)	
SGML-01	78 (17)	54 (12)	
SGML-02	245 (55)	74 (16)	
SGML-03	245 (55)	74 (16)	
SGML-04	245 (55)	74 (16)	
SGML-08	392 (88)	147 (33)	

2) Mechanical Tolerance


The tolerances of the SGML Servomotor output shaft and installation are shown in the table below.

Tolerance (T.I.R.)		Reference Diagram
Perpendicularity between flange face and output shaft (A)	0.08mm (0.0031in.)	
Mating concentricity of flange O.D. (B)	0.06mm (0.0024in.)	
Run-out at end of shaft (C)	0.03mm (0.0012in.)	

Note T.I.R. = Total Indicator Reading


3) Direction of Motor Rotation

Positive rotation of the servomotor is counter-clockwise, viewing from the load.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4) Impact Resistance

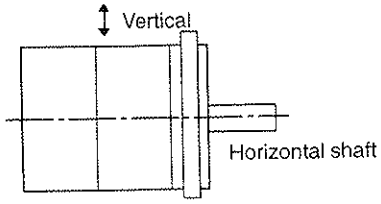


Mount the servomotor with the axis horizontal. The servomotor must withstand the following vertical impacts.

- Impact Acceleration: 98 m/s^2 (10 G)
- Number of Impacts: 2

NOTE In SGML Servomotor, an accurate detector is attached to the shaft at the opposite end from the load.
Avoid applying impacts directly to the shaft as these may damage the detector.


5) Vibration Resistance

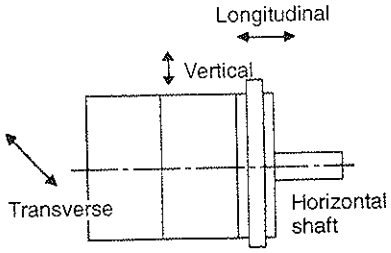

Mount the servomotor with the axis horizontal. The servomotor must withstand the following vibration accelerations in three directions: vertical, transverse, and longitudinal.

- Vibration Acceleration: 24.5 m/s^2 (2.5 G)

6) Vibration Class



The SGML Servomotor meets the following **vibration class** at rated speed.

- Vibration Class: 15μm or below



Vibration Class

Vibration class 15μm or below indicates that the total amplitude of vibration of the motor alone, running at rated speed, does not exceed 15μm.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.3 Servopack Ratings and Specifications

This section presents tables of SGDL Servopack ratings and specifications.

4.3.1 Ratings and Specifications 156
4.3.2 Overload Characteristics 159
4.3.3 Starting Time and Stopping Time 160
4.3.4 Load Inertia 160
4.3.5 Overhanging Loads 162
4.3.6 Power Consumption 163

4.3.1 Ratings and Specifications

1) The ratings and specifications of the SGDL Servopack are shown on the next page. Refer to them as required when selecting a Servopack.
Refer to the specifications listed for combination with the appropriate type of Servomotor.

2) Ratings and Specifications of SGDL Servopack

Voltage			200 VAC						100 VAC				
SGDL Servopack			A3AS	A5AS	01AS	02AS	04AS	08AS	A3BS	A5BS	01BS	02BS	03BS
Max. Applicable Motor Capacity W (HP)			30 (0.04)	50 (0.07)	100 (0.13)	200 (0.27)	400 (0.53)	750 (1.01)	30 (0.04)	50 (0.07)	100 (0.13)	200 (0.27)	300 (0.40)
Combined Specifications	Motor	Type SGML-	A3AF	A5AF	01AF	02AF	04AF	08AF	A3BF	A5BF	01BF	02BF	03BF
		Motor Capacity W (HP)	30 (0.04)	50 (0.07)	100 (0.13)	200 (0.27)	400 (0.53)	750 (1.01)	30 (0.04)	50 (0.07)	100 (0.13)	200 (0.27)	300 (0.40)
		Rated/Max. Motor Speed	3000/4500 r/min						3000/4500 r/min				
		Applicable encoder	Incremental encoder 1024 P/R										
Combined Specifications		Allowable Load Inertia*1 J_L $kg \cdot m^2 \times 10^{-4}$ $(oz \cdot in \cdot s^2 \times 10^{-3})$	0.63 (8.80)	0.78 (11.0)	1.20 (17.0)	3.69 (52.2)	3.82 (54.1)	13.4 (189)	0.63 (8.80)	0.78 (11.0)	1.20 (17.0)	3.69 (52.2)	3.82 (54.1)
Combined Specifications	Continuous Output Current		0.42	0.6	0.87	2.0	2.6	4.4	0.63	0.90	2.2	2.7	3.7
	Max. Output Current		1.3	1.9	2.8	6.0	8.0	13.9	2.0	2.9	7.1	8.4	14.8

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Voltage			200 VAC						100 VAC				
SGDL Servopack			A3AS	A5AS	01AS	02AS	04AS	08AS	A3BS	A5BS	01BS	02BS	03BS
Max. Applicable Motor Capacity W (HP)			30 (0.04)	50 (0.07)	100 (0.13)	200 (0.27)	400 (0.53)	750 (1.01)	30 (0.04)	50 (0.07)	100 (0.13)	200 (0.27)	300 (0.40)
Basic Specifications	Power Supply		Single-phase 200 to 230 VAC, +10% to −15%, 50/60 Hz						Single-phase 100 to 115 VAC*2, +10% to −15%, 50/60 Hz				
	Control Method		Single-phase, full-wave rectification IGBT-PWM (sine-wave driven)										
	Feedback		Incremental encoder 1024 P/R										
	Location	Ambient Temp.	0 to 50°C*3										
		Storage Temp.	−20 to +85°C										
		Ambient/ Storage Humidity	90% or less (with no condensation)										
		Vibration/ Shock Resistance	4.9m/s^2 / 19.6m/s^2 (0.5/2G)										
	Structure		Base mounted										
	Approx. mass kg (lb)		0.9 (1.98)			1.2 (2.65)	1.5 (3.31)		0.9 (1.98)			1.2 (2.65)	1.5 (3.31)
Performance	Speed Control Range*4		1:5000										
	Speed Regulation*5	Load Regulation	0% to 100%:0.01% max. (at rated speed)										
		Voltage Regulation	0%										
		Temperature Regulation	25±25°C: ±0.1% max. (at rated speed)										
	Frequency Characteristics		200 Hz (at J_L=J_M)										
	Torque Control (Repeatability)		±2.0%										
	Accel/Decel Time Setting		0 to 10 s										
Input Signal	Speed Reference	Rated Reference Voltage	±6 VDC (positive motor rotation with positive reference) at rated speed (factory setting) Variable setting range: ±2 to ±10 VDC at rated torque										
		Input Impedance	Approx. 30 kΩ										
		Circuit Time Constant	Approx. 47 µs										
	Torque Reference	Rated Reference Voltage	±3 VDC (positive motor rotation with positive reference) at rated speed (factory setting) Variable setting range: ±1 to ±10 VDC at rated torque										
		Input Impedance	Approx. 30 kΩ										
		Circuit Time Constant	Approx. 47 µs										

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.3.1 Ratings and Specifications cont.

Voltage			200 VAC						100 VAC				
SGDL Servopack			A3AS	A5AS	01AS	02AS	04AS	08AS	A3BS	A5BS	01BS	02BS	03BS
Max.Applicable Motor Capacity W (HP)			30 (0.04)	50 (0.07)	100 (0.13)	200 (0.27)	400 (0.53)	750 (1.01)	30 (0.04)	50 (0.07)	100 (0.13)	200 (0.27)	300 (0.40)
I/O Signals	Position Output	Output Form	A-, B-, C-phase line driver										
		Frequency Dividing Ratio	(16 to N) /N N=1024*6										
	Sequence Input		Servo ON, P drive (or motor forward/reverse by torque control, zero-clamp drive reference, or internal setting speed), forward run stop (P-OT), reverse run stop (N-OT), current limit + selection (or internal speed selection), current limit – selection (or internal speed selection), alarm reset										
	Sequence Output		Current limit detection (or TGON), external brake interlock, servo alarm, 3-bit alarm codes										
Dynamic Brake			Operated at main power OFF, servo alarm or overtravel.										
External Regenerative Unit			Required when exceeding the allowable load inertia*1										
Overtravel			Dynamic brake stop at P-OT or N-OT										
Protective Functions			Overcurrent, grounding, overload, overvoltage, overspeed, reference input read error, overrun prevention, CPU error, encoder error										
Indicators			Alarm and power LEDs										
			Programming panel is available as an option										
Others			Torque control, zero clamp operation (position loop stop), soft start/stop, brake interlock signal output, reverse run connection, JOG run, auto-tuning										

*1 Allowable load inertia ranges require no optional external regenerative unit. Values are 30 times the moment of inertia for 30 W (0.04 HP) to 200 W (0.27 HP) Servomotors, and 20 times for 400 W (0.53 HP) and 750 W (1.01 HP) Servomotors. If load inertias exceed these ranges, restrict the operation or use a regenerative unit.

*2 Supply voltage should not exceed 230 V + 10% (253 V) or 115 V + 10% (127 V). A step-down transformer is required if the voltage should exceed these values.

*3 Use within the ambient temperature range. When enclosed in a box, the internal temperatures must not exceed the ambient temperature range.

*4 The lowest speed of the speed control range is the speed at which the motor does not stop under 100% load.

*5 Speed regulation is defined as follows:

$$\text{Speed regulation} = \frac{\text{No-load-speed} - \text{Full-load-speed}}{\text{Rated speed}} \times 100\%$$

The motor speed may change due to voltage variations or amplifier drift and changes in processing resistance due to temperature variation.
These ratios of the speed changes to the rated speed represent the speed regulation due to voltage and temperature variations.


*6 N is the number of encoder pulses.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.3.2 Overload Characteristics

The Servopack has a built-in overload protective function to protect the Servopack and Servomotor from overload. Therefore, the Servopack allowable power is limited by the overload protective function, as shown below.

The overload detection level is quoted under **hot start** conditions at a motor ambient temperature of 40°C.

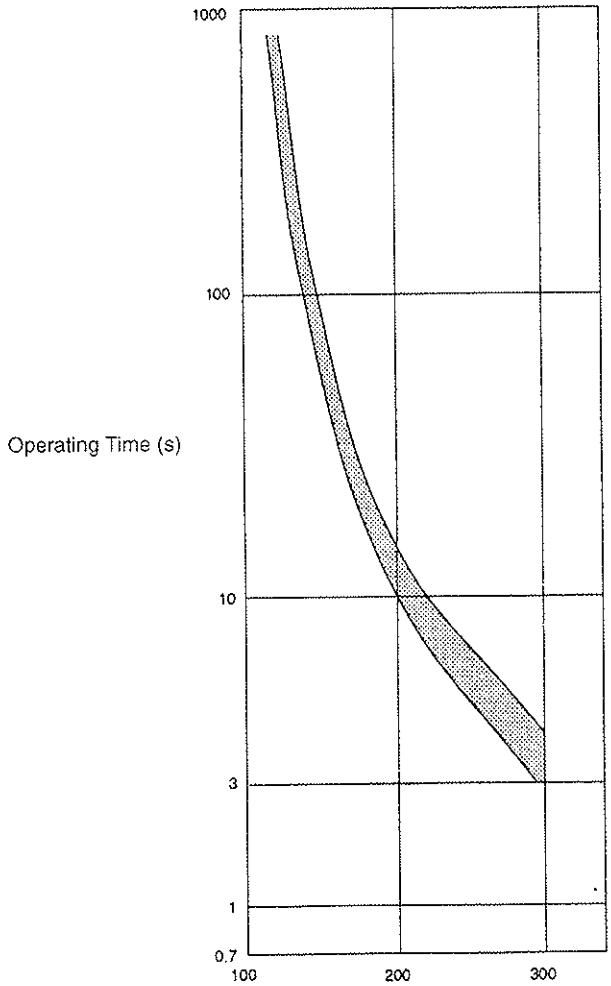

Overload Characteristics

TERMS

Hot Start

Indicates that both Servopack and Servomotor have run long enough at rated load to be thermally saturated.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


4.3.3 Starting Time and Stopping Time

1) The motor starting time (tr) and stopping time (tf) under constant load are calculated by the following formulas. The motor viscous torque and friction torque are ignored.

$$\text{Starting Time:} \quad tf = 104.7 \times \frac{N_R\ (J_M + J_L)}{K_t \cdot I_R\ (\alpha - \beta)}\ [ms]$$

$$\text{Stopping Time:} \quad tf = 104.7 \times \frac{N_R\ (J_M + J_L)}{K_t \cdot I_R\ (\alpha + \beta)}\ [ms]$$

N_R: Motor rated speed (r/min.)
J_M: Motor moment of inertia ($kg \cdot m^2 = lb \cdot in \cdot s^2$) . . . ($GD^2_M/4$)
J_L: Load converted to shaft moment of inertia ($kg \cdot m^2$) . . ($GD^2_L/4$)
K_t: Motor torque constant ($N \cdot m/A = lb \cdot in/A$)
I_R: Motor rated current (A)
$\alpha = I_P/I_R$: Accel/decel current coefficient
[where I_P is accel/decel current (accel/decel current is α times the motor rated current) (A)]
$\beta = I_L/I_R$]: Load current coefficient
[I_L]: Load torque equivalent current (load current is β times the motor rated current) (A)]

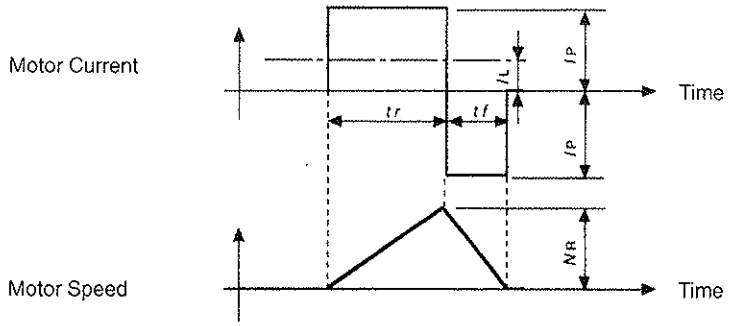


Motor Current (size) - Motor Speed Timing Chart

4.3.4 Load Inertia


1) The larger the load inertia becomes, the worse the movement response of the load. The size of the load inertia [J_L] allowable when using a Servomotor depends on the motor capacity, as shown in the diagrams below.


- Small Load Inertia





Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


- Large Load Inertia

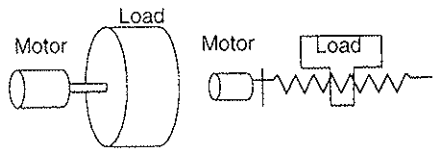


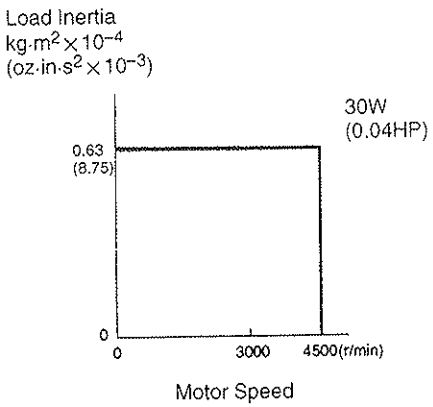


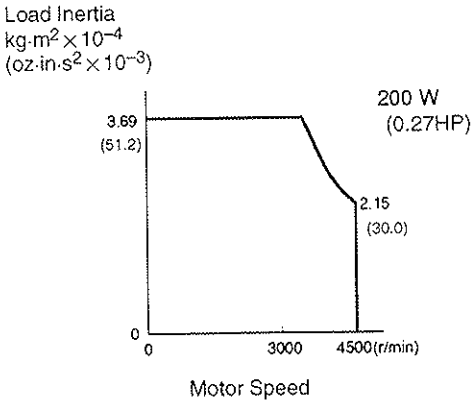

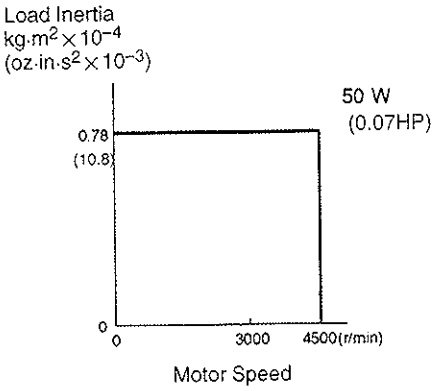

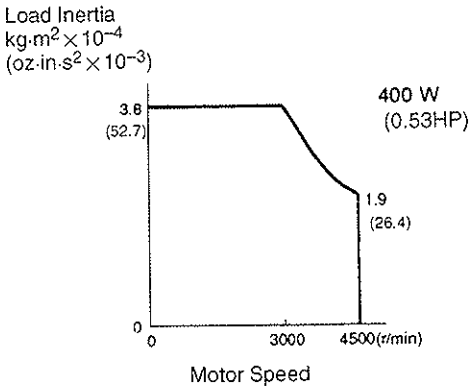

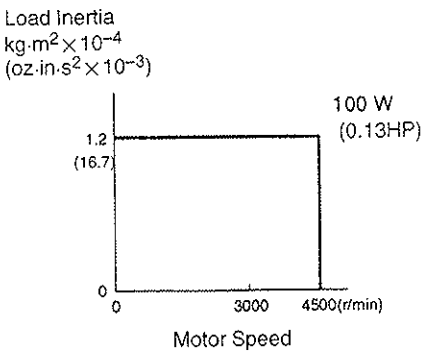

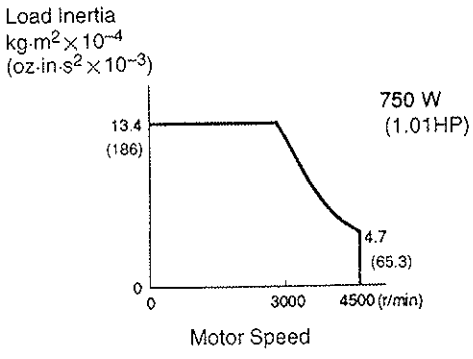

Note The above diagrams represent deceleration under maximum torque. Applying an acceleration/deceleration curve to the reference allows operation outside the range of the diagrams. (That is, characteristics change according to pattern of operation and load conditions).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2) An overvoltage alarm is likely during deceleration if the load inertia exceeds the range of the diagrams. Take one of the countermeasures below.

a) Reduce the torque limit value.

b) Reduce the deceleration rate.


c) Reduce the maximum speed used.

d) Add a regenerative unit.


4.3.5 Overhanging Loads

1) A Servomotor may not be operated under an overhanging load, that is a load which tends to continually rotate the motor.
Under an overhanging load (e.g. when the direction of the torque applied by the motor is opposite from the direction of shaft rotation), the Servopack regenerative brake is applied continuously and the regenerative energy of the load may exceed the allowable range and damage the Servopack.
The regenerative brake capacity of the SGDL Servopack is rated for short-time operation, approximately equivalent to the deceleration stopping time.

• Overhanging Load Example 1: Motor drive for vertical axis, using no counterweight

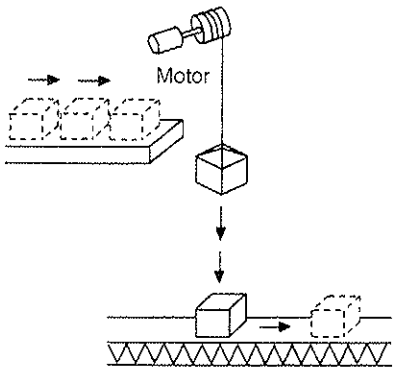

• Overhanging Load Example 2: Tension control drive

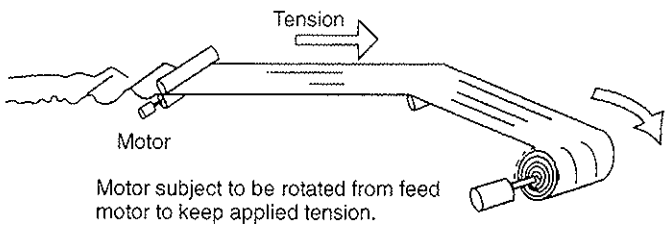

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.3.6 Power Consumption

Servopack SGDL-		In-rush Current (Peak Value) A	Output Current (Effective Value) A	Power Loss W			<Total> Power Loss W
				Main Circuit	Control Circuit	DB Circuit	
Supply Voltage 200V	A3AS (30W-0.04HP)	20	0.42	2.9	13	Varies depending on operating conditions	15.9
	A5AS (50W-0.07HP)	20	0.6	4.2	13		17.2
	01AS (100W-0.13HP)	30	0.87	6.3	13		19.3
	02AS (200W-0.27HP)	30	2.0	14.5	13		27.5
	04AS (400W-0.53HP)	30	2.6	22.2	13		35.2
	08AS (750W-1.01HP)	70	4.4	36.1	13		49.1
Supply Voltage 100V	A3BS (30W-0.04HP)	10	0.63	2.9	13		15.9
	A5BS (50W-0.07HP)	15	0.9	4.4	13		17.4
	01BS (100W-0.13HP)	15	2.2	12.0	13		25.0
	02BS (200W-0.27HP)	15	2.7	16.2	13		29.2
	03BS (300W-0.40HP)	35	3.7	20.1	13		33.1

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.4 Σ-L Series Dimensional Drawings

This section presents dimensional drawings of the Σ-L Series Servomotor, Servopack, and Digital Operator.

4.4.1 Servomotor Dimensional Drawings 164
4.4.2 Servopack Dimensional Drawings 178
4.4.3 Digital Operator Dimensional Drawings 181

4.4.1 Servomotor Dimensional Drawings

1) The dimensional drawings of the SGML Servomotors are broadly grouped into the following two categories.

   a) Incremental encoder, no brake (from page 165)

   b) Incremental encoder, with brake (from page 169)

   Motor capacities are available as 30 W (0.04 HP), 50 W (0.07 HP), 100 W (0.13 HP), 200 W (0.27 HP), 300 W (0.40 HP), 400 W (0.53 HP), 750 W (1.01 HP). These are grouped into three categories, as follows:

   • 30W (0.04 HP), 50W (0.07 HP), 100W (0.13 HP)


   • 200W (0.27 HP), 300W (0.40 HP), 400W (0.53 HP)

   • 750W (1.01 HP)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

(1) SGML Servomotor
Incremental encoder, no brake

• 30W (0.04 HP), 50W (0.07 HP),100W (0.13 HP)

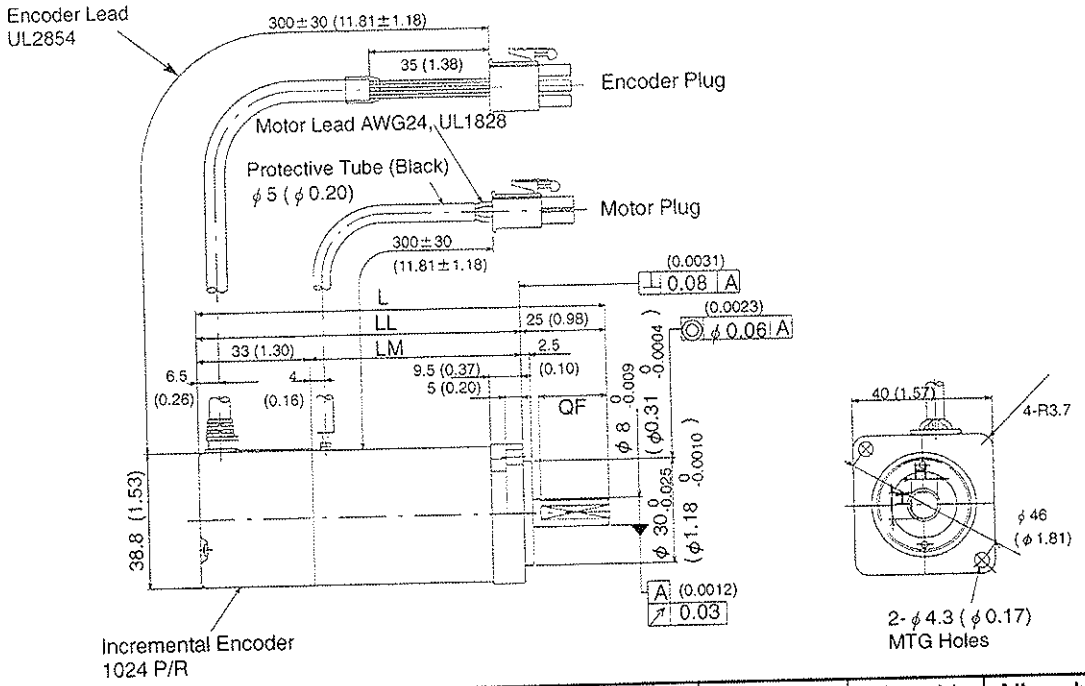

Type SGML-	L	LL	LM	QF	H	Output W (HP)	Approx. mass kg (lb)	Allowable radial load N (lb)	Allowable thrust load N (lb)
A3AF12	94.5 (3.72)	69.5 (2.74)	36.5 (1.44)	W/O flat key seat		30 (0.04)	0.3 (0.66)	68 (15)	54 (12)
A3BF12									
A3AF13				20 (0.79)	7.5 (0.30)				
A3BF13									
A5AF12	102.0 (4.02)	77.0 (3.03)	44.0 (1.73)	W/O flat key seat		50 (0.07)	0.4 (0.88)		
A5BF12									
A5AF13				20 (0.79)	7.5 (0.30)				
A5BF13									
01AF12	119.5 (4.70)	94.5 (3.72)	61.5 (2.42)	W/O flat key seat		100 (0.13)	0.5 (1.10)	78 (18)	
01BF12									
01AF13				20 (0.79)	7.5 (0.30)				
01BF13									

Note 1) The detector uses an incremental encoder 1024 P/R.


2) Type "A" indicates 200 V specification, and type "B" indicates 100 V specification.

3) The quoted allowable radial load is the value at a position 20 mm (0.79 in.) from the motor mounting surface.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.4.1 Servomotor Dimensional Drawings cont.

• 200 W (0.27 HP), 300 W (0.04 HP, 100 VAC only), 400 W (0.53 HP, 200 VAC only)

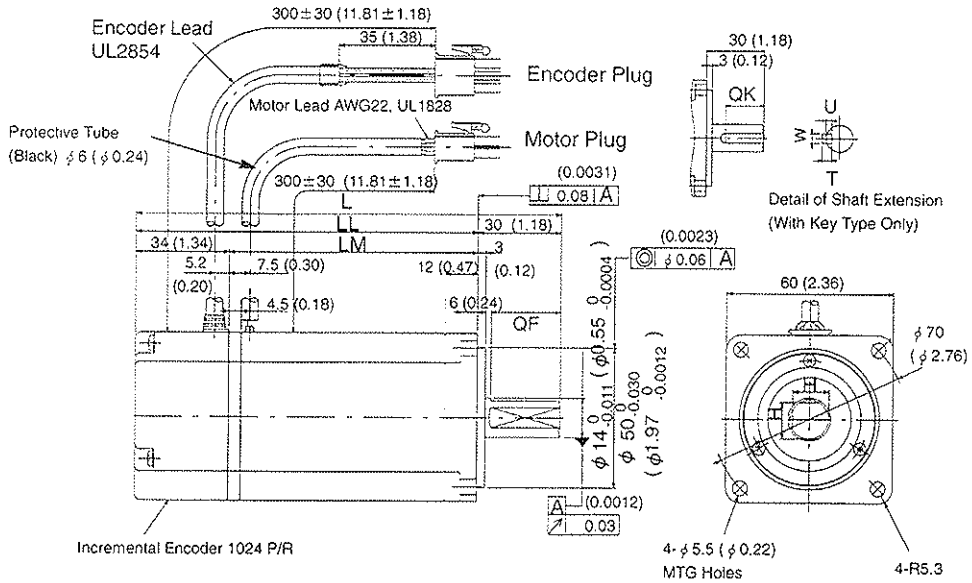

Type SGML-	L	LL	LM	QK	U	W	T	QF	H	Output W (HP)	Approx. mass kg (lb)	Allowable radial load N (lb)	Allowable thrust load N (lb)
02AF12	126.5 (4.98)	96.5 (3.80)	62.5 (2.46)	No key				W/O flat key seat		200 (0.27)	1.1 (2.43)	245 (55.1)	74 (17)
02BF12													
02AF13								25 (0.98)	13 (0.51)				
02BF13													
02AF14				20 (0.79)	3 (0.12)	5 (0.20)	5 (0.20)	W/O flat key seat					
02BF14													
03BF12	154.5 (6.08)	124.5 (4.90)	90.5 (3.56)	No key				W/O flat key seat		300 (0.40)	1.7 (3.75)		
03BF13								25 (0.98)	13 (0.51)				
03BF14				20 (0.79)	3 (0.12)	5 (0.20)	5 (0.20)	W/O flat key seat					
04AF12				No key				W/O flat key seat		400 (0.53)			
04AF13								25 (0.98)	13 (0.51)				
04AF14				20 (0.79)	3 (0.12)	5 (0.20)	5 (0.20)	W/O flat key seat					

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Note 1) The detector uses an incremental encoder 1024 P/R.

2) Type "A" indicates 200 V specification, and type "B" indicates 100 V specification.

3) "02A(B)F14", "03BF14" and "04AF14" have a keyed shaft. The keyway complies with JIS B 1301-1976 (precision). A straight key is supplied.

4) The quoted allowable radial load is the value at a position 25 mm (0.98 in.) from the motor mounting surface.

- 750 W (1.01 HP, 200 VAC only)

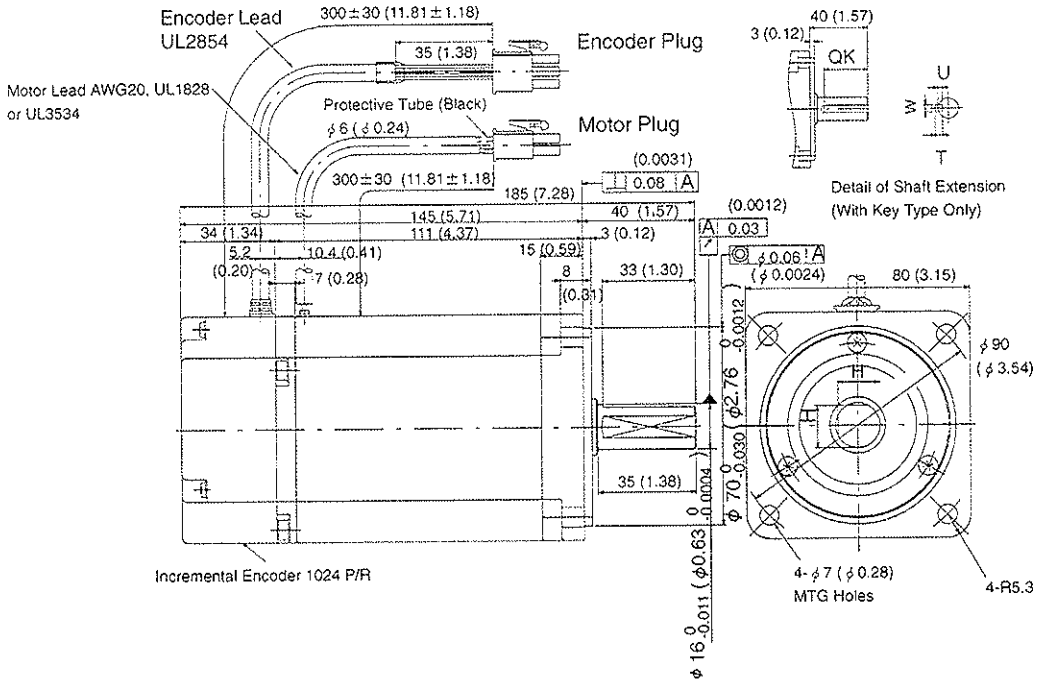

Type SGML-	QK	U	W	T	QF	H	Output W (HP)	Approx. mass kg (lb)	Allowable radial load N (lb)	Allowable thrust load N (lb)
08AF12	No key				W/O flat key seat		750 (1.01)	3.4 (7.50)	392 (88)	147 (33)
08AF13					33 (1.30)	15 (0.59)				
08AF14	30 (1.18)	3 (0.12)	5 (0.20)	5 (0.20)	W/O flat key seat					

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.4.1 Servomotor Dimensional Drawings cont.

Note 1) The detector uses an incremental encoder 1024 P/R.


2) Type "A" indicates 200 V specification.

3) "08AF14" has a keyed shaft. The keyway complies with JIS B 1301-1976 (precision). A straight key is supplied.

4) The quoted allowable radial load is the value at a position 25 mm (0.98 in.) from the motor mounting surface.

• Details of Motor and Encoder Plugs (Common for 30 W (0.04 HP) to 750 W (1.01 HP)

Motor Plug




Plug : 172167-1 (AMP)
Pin: (30 to 100W)
170359-1 or 170363-1
(200W to 750W)
170360-1 or 170364-1
Connected to
Cap: 172159-1
Socket: 170362 -1 or 170366-1

Motor Wiring Specifications

1	U phase	Red
2	V phase	White
3	W phase	Blue
4	FG	Green

Encoder Plug



Plug: 172169-1 (Made by AMP)
Pin: 170359-1 or 170363-1
Connected to
Cap :172161-1
Socket: 170361-1 or 170365-1


Incremental Encoder Wiring Specifications

1	A channel output	Blue
2	$\overline{A}$ channel output	Blue/Black
3	B channel output	Yellow
4	$\overline{B}$ channel output	Yellow/Black
5	C channel output	Green
6	$\overline{C}$ channel output	Green/Black
7	0V (power supply)	Gray
8	+5V (power supply)	Red
9	FG (Frame Ground)	Orange

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

(2) SGML Servomotor
Incremental encoder, with brake

• 30W (0.04 HP), 50W (0.07 HP), 100W (0.13 HP)

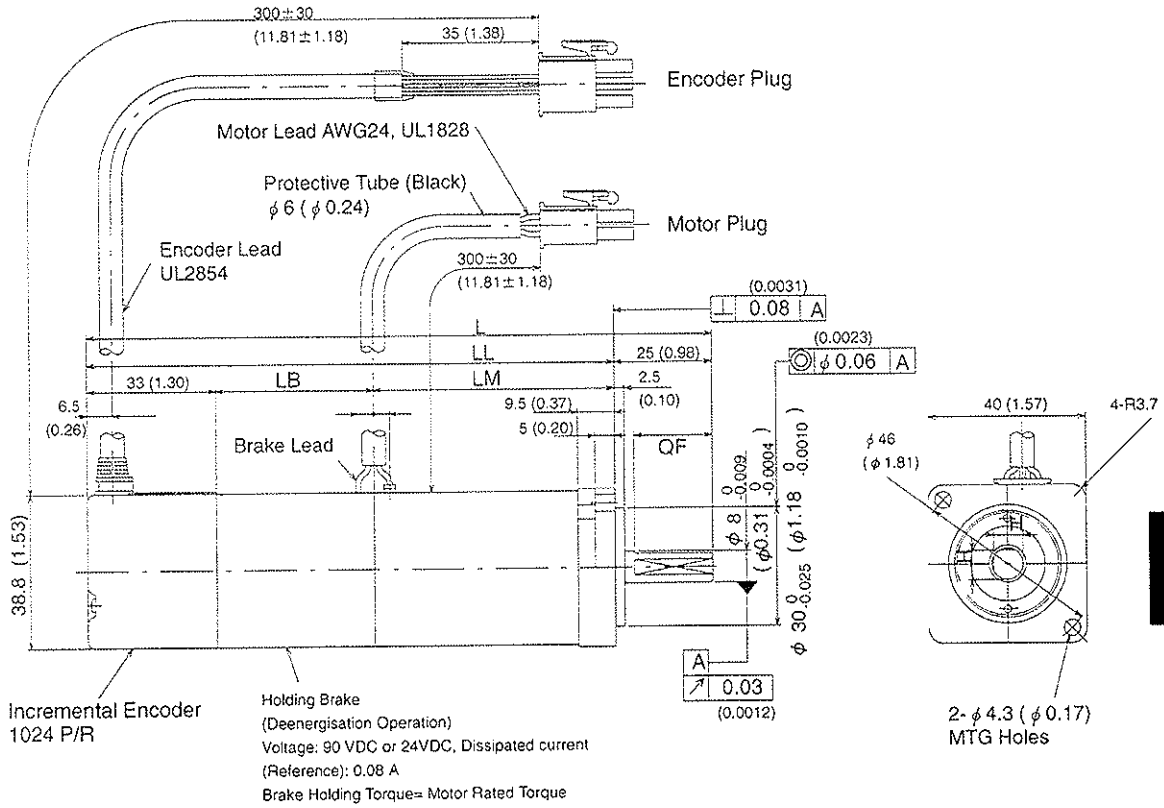

Type SGML-	L	LL	LM	QF	H	Output W (HP)	Approx. mass kg (lb)	Allowable radial load N (lb)	Allowable thrust load N (lb)
A3AF12✳	126.0 (4.96)	101.0 (3.98)	36.5 (1.44)	W/O flat key seat		30 (0.04)	0.6 (1.32)	68 (15)	54 (12)
A3BF12✳									
A3AF13✳				20 (0.79)	7.5 (0.30)				
A3BF13✳									
A5AF12✳	133.5 (5.26)	108.5 (4.27)	44.0 (1.73)	W/O flat key seat		50 (0.07)	0.7 (1.54)		
A5BF12✳									
A5AF13✳				20 (0.79)	7.5 (0.30)				
A5BF13✳									
01AF12✳	160.0 (6.30)	135.0 (5.31)	61.5 (2.42)	W/O flat key seat		100 (0.13)	0.8 (1.76)	78 (18)	
01BF12✳									
01AF13✳				20 (0.79)	7.5 (0.30)				
01BF13✳									

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Note

1) The detector uses an incremental encoder 1024 P/R.

2) Type "A" indicates 200 V specification, and type "B" indicates 100 V specification.


3) The quoted allowable radial load is the value at a position 20 mm (0.79 in.) from the motor mounting surface.

4) The electromagnetic brake is only to hold the load in position and cannot be used to stop the motor.

5) "*" of the type designation depends on the brake power voltage: "B" for 90 VDC and "C" for 24VDC.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

• 200 W (0.53 HP), 300 W (0.40 HP, 100 VAC only), 400 W (0.27 HP, 200 VAC only)

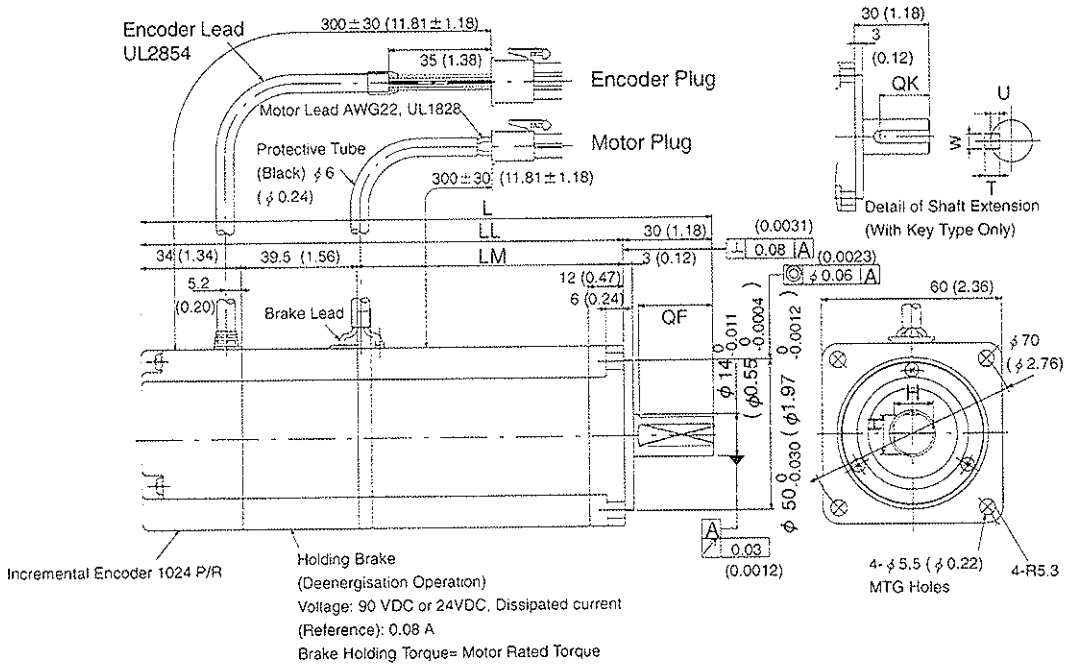

Type SGML-	L	LL	LM	QK	U	W	T	QF	H	Output W (HP)	Approx. mass kg (lb)	Allowable radial load N (lb)	Allowable thrust load N (lb)
02AF12✳	166.0 (6.54)	136.0 (5.35)	62.5 (2.46)	No key				W/O flat key seat		200 (0.27)	1.6 (3.53)	245 (55.1)	74 (17)
02BF12✳													
02AF13✳								25 (0.98)	13 (0.51)				
02BF13✳													
02AF14✳				20 (0.79)	3 (0.12)	5 (0.20)	5 (0.20)	W/O flat key seat					
02BF14✳													
03BF12✳	194.0 (7.64)	164.0 (6.46)	90.5 (3.56)	No key				W/O flat key seat		300 (0.40)	2.2 (4.85)		
03BF13✳								25 (0.98)	13 (0.51)				
03BF14✳				20 (0.79)	3 (0.12)	5 (0.20)	5 (0.20)	W/O flat key seat					
04AF12✳				No key				W/O flat key seat		400 (0.53)			
04AF13✳								25 (0.98)	13 (0.51)				
04AF14✳				20 (0.79)	3 (0.12)	5 (0.20)	5 (0.20)	W/O flat key seat					

Note 1) The detector uses an incremental encoder 1024 P/R.

2) Type "A" indicates 200 V specification, and type "B" indicates 100 V specification.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


3) "02A(B)F14⁎", "03BF14⁎" and "04AF14⁎" have a keyed shaft. The keyway complies with JIS B 1301-1976 (precision). A straight key is supplied.

4) The quoted allowable radial load is the value at a position 25 mm (0.98 in.) from the motor mounting surface.

5) The electromagnetic brake is only to hold the load in position and cannot be used to stop the motor.

6) "⁎" of the type designation depends on the brake power voltage: "B" for 90 VDC and "C" for 24VDC.

- 750 W (1.01 HP)

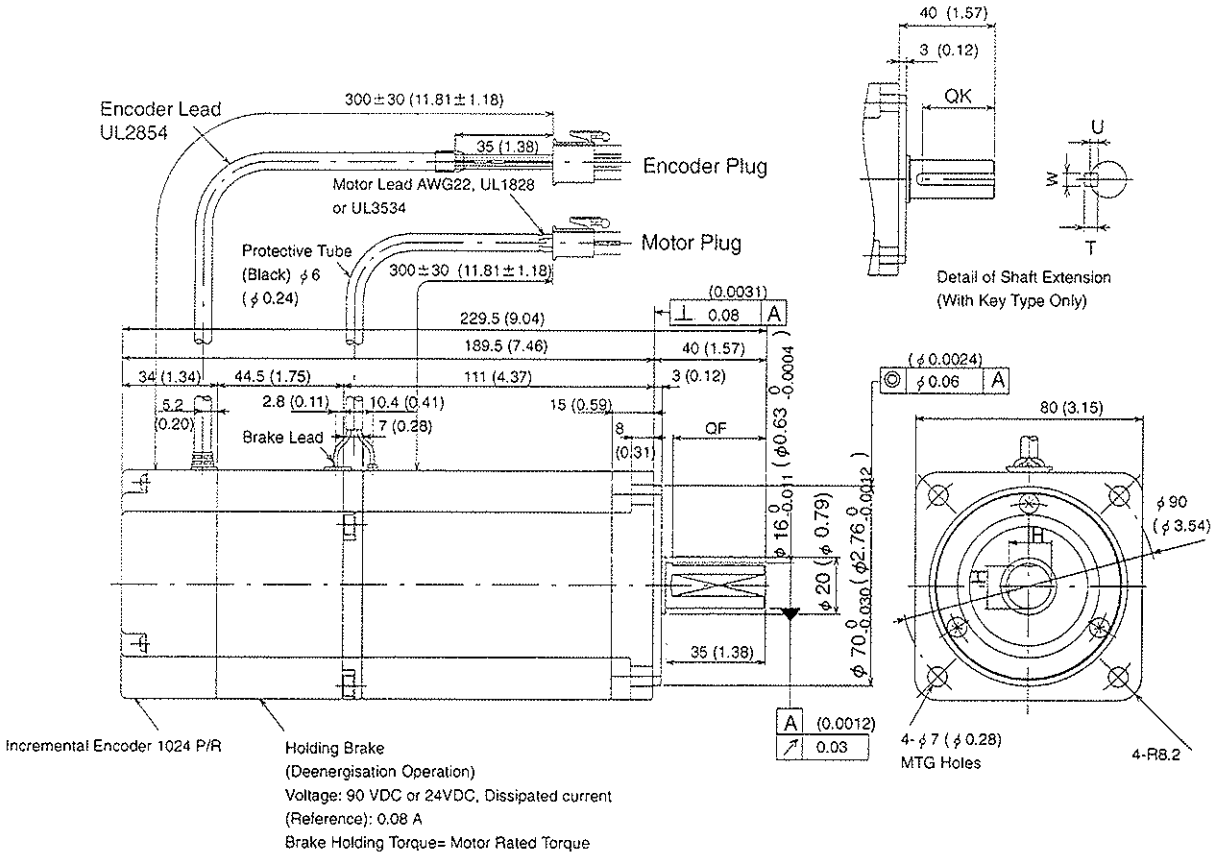

Type SGML-	QK	U	W	T	QF	H	Output W (HP)	Approx. mass kg (lb)	Allowable radial load N (lb)	Allowable thrust load N (lb)
08AF12⁎	No key				W/O flat key seat		750 (1.01)	4.3 (9.48)	392 (88)	147 (33)
08AF13⁎					33 (1.30)	15 (0.59)				
08AF14⁎	30 (1.18)	3 (0.12)	5 (0.20)	5 (0.20)	W/O flat key seat					

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Note

1) The detector uses an incremental encoder 1024 P/R.

2) Type "A" indicates 200 V specification.

3) "08AF14∗" has a keyed shaft. The keyway complies with JIS B 1301-1976 (precision). A straight key is supplied.


4) The quoted allowable radial load is the value at a position 25 mm (0.98 in.) from the motor mounting surface.

5) The electromagnetic brake is only to hold the load in position and cannot be used to stop the motor.

6) "∗" of the type designation depends on the brake power voltage: "B" for 90 VDC and "C" for 24VDC.

- Details of Motor and Encoder Plugs (Common for 30 W (0.04 HP) to 750 W (1.01 HP)

Motor Plug




Plug : 172168-1 (AMP)
Pin: (30 to 100W)
170359-1 or 170363-1
(200W to 750W)
170360-1 or 170364-1
Connected to
Cap: 172160-1
Socket: 170362 -1 or 170366-1

Motor Wiring Specifications

1	U phase	Red
2	V phase	White
3	W phase	Blue
4	FG	Green/Yellow
5	Brake terminal	Red
6	Brake terminal	Black

Encoder Plug



Plug: 172169-1 (AMP)
Pin: 170359-1 or 170363-1
Connected to
Cap :172161-1
Socket: 170361-1 or 170365-1


Incremental Encoder Wiring Specifications

1	A channel output	Blue
2	$\overline{A}$ channel output	Blue/Black
3	B channel output	Yellow
4	$\overline{B}$ channel output	Yellow/Black
5	C channel output	Green
6	$\overline{C}$ channel output	Green/Black
7	0V (power supply)	Gray
8	+5V (power supply)	Red
9	FG (Frame Ground)	Orange

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.4.1 Servomotor Dimensional Drawings cont.

(3) SGML Servomotor
Incremental encoder, with standard backlash gears

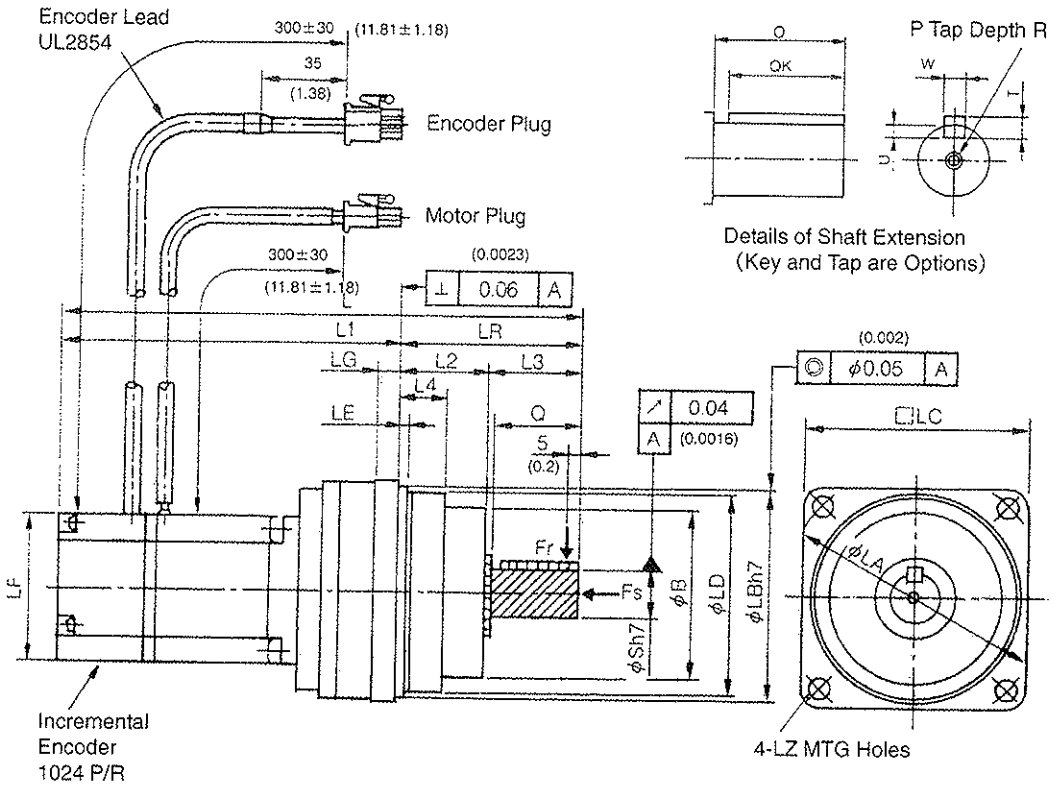

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

MOTOR TYPE SGML-	L	L1	LR	LG	L2	L3	L4	LE	LB	LF	LD	LA
A3□FJ1□	156.5 (6.17)	101.5 (4.0)	55 (2.17)	8 (0.32)	28 (1.10)	27 (1.06)	17 (0.67)	4 (0.16)	56 (2.21)	38.8 (1.53)	55.5 (2.19)	70 (2.76)
A3□FJ2□												
A3□FJ3□	171.5 (6.76)	116.5 (4.07)										
A3□FJ4□												
A5□FJ1□	164 (6.46)	109 (3.80)	55 (2.17)	8 (0.32)	28 (1.10)	27 (1.06)	17 (0.67)	4 (0.16)	56 (2.21)	38.8 (1.53)	55.5 (2.19)	70 (2.76)
A5□FJ2□	174 (6.86)	114 (4.49)	60 (2.34)	9 (0.35)	30 (1.18)	30 (1.18)	14.5 (0.57)		65 (2.56)		63 (2.48)	80 (3.15)
A5□FJ3□	191 (7.53)	131 (5.16)										
A5□FJ4□												
01□FJ1□	191.5 (7.54)	131.5 (5.18)	60 (2.34)	9 (0.35)	30 (1.18)	30 (1.18)	14.5 (0.57)	4 (0.16)	65 (2.56)	38.8 (1.53)	63 (2.48)	80 (3.15)
01□FJ2□												
01□FJ3□	227 (8.94)	153 (6.03)	74 (2.92)	10 (0.39)	36 (1.42)	38 (1.50)	19.5 (0.77)		85 (3.35)		83 (3.27)	105 (4.14)
01□FJ4□												
02□FJ1□	212 (8.35)	138 (5.54)	74 (2.92)	10 (0.39)	36 (1.42)	38 (1.50)	19.5 (0.77)	4 (0.16)	85 (3.35)	60 (2.36)	83 (3.27)	105 (4.14)
02□FJ2□												
02□FJ3□	249.5 (9.83)	165.5 (6.52)	84 (3.31)	12 (0.47)	40 (1.58)	44 (1.73)	23 (0.91)		100 (3.94)		98 (3.86)	120 (4.72)
02□FJ4□												
03BFJ1□	240 (9.46)	166 (6.54)	74 (2.92)	10 (0.39)	36 (1.42)	38 (1.50)	19.5 (0.77)	4 (0.16)	85 (3.35)	60 (2.36)	83 (3.27)	105 (4.14)
03BFJ2□	256.5 (10.11)	172.5 (6.80)	84 (3.31)	12 (0.47)	40 (1.58)	44 (1.73)	23 (0.91)		100 (3.94)		98 (3.86)	120 (4.72)
03BFJ3□	305.5 (12.04)	200.5 (7.80)	105 (4.14)	13 (0.51)	45 (1.77)	60 (2.36)	26.5 (1.04)	5 (0.20)	115 (4.53)		112 (4.41)	135 (5.32)
03BFJ4□												
04AFJ1□	240 (9.46)	166 (6.54)	74 (2.92)	10 (0.39)	36 (1.42)	38 (1.50)	19.5 (0.77)	4 (0.16)	85 (3.35)	60 (2.36)	83 (3.27)	105 (4.14)
04AFJ2□	256.5 (10.11)	172.5 (6.80)	84 (3.31)	12 (0.47)	40 (1.58)	44 (1.73)	23 (0.91)		100 (3.94)		98 (3.86)	120 (4.72)
04AFJ3□	305.5 (12.04)	200.5 (7.80)	105 (4.14)	13 (0.51)	45 (1.77)	60 (2.36)	26.5 (1.04)	5 (0.20)	115 (4.53)		112 (4.41)	135 (5.32)
04AFJ4□												
08AFJ1□	277 (10.91)	193 (7.60)	84 (3.31)	12 (0.47)	40 (1.58)	44 (1.73)	23 (0.91)	4 (0.16)	100 (3.94)	80 (3.15)	98 (3.86)	120 (4.72)
08AFJ2□	301 (11.86)	196 (7.72)	105 (4.14)	13 (0.51)	45 (1.77)	60 (2.36)	26.5 (1.04)	5 (0.20)	115 (4.53)		112 (4.41)	135 (5.32)
08AFJ3□	330 (13.00)	223 (8.79)	107 (4.22)	15 (0.59)	42 (1.65)	65 (2.61)	–	10 (0.39)	140 (5.52)		–	165 (6.50)
08AFJ4□												

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.4.1 Servomotor Dimensional Drawings cont.

MOTOR TYPE SGML-	LC	LZ	S	B	Q	QK	W	T	U	P	R	Mass kg (lb)
A3□FJ1□	60 (2.36)	5.5 (0.22)	14 (0.55)	47 (1.85)	25 (0.99)	20 (0.79)	5 (0.20)	5 (0.20)	3 (0.12)	M4	8 (0.32)	0.9 (2.0)
A3□FJ2□												
A3□FJ3□												1 (2.2)
A3□FJ4□												
A5□FJ1□	60 (2.36)	5.5 (0.22)	14 (0.55)	47 (1.85)	25 (0.99)	20 (0.79)	5 (0.20)	5 (0.20)	3 (0.12)	M4	8 (0.32)	1 (2.2)
A5□FJ2□	70 (2.76)	6.6 (0.26)	16 (0.63)	57 (2.25)	28 (1.10)	25 (0.99)						1.2 (2.6)
A5□FJ3□												1.3 (2.9)
A5□FJ4□												
01□FJ1□	70 (2.76)	6.6 (0.26)	16 (0.63)	57 (2.25)	28 (1.10)	25 (0.99)	5 (0.20)	5 (0.20)	3 (0.12)	M4	8 (0.32)	1.3 (2.9)
01□FJ2□												
01□FJ3□	90 (3.55)	9 (0.35)	20 (0.79)	69 (2.72)	36 (1.42)	32 (1.26)	6 (0.24)	6 (0.24)	3.5 (0.14)	M5	10 (0.39)	2.4 (5.3)
01□FJ4□												
02□FJ1□	90 (3.55)	9 (0.35)	20 (0.79)	69 (2.72)	36 (1.42)	32 (1.26)	6 (0.24)	6 (0.24)	3.5 (0.14)	M5	10 (0.39)	2.8 (6.2)
02□FJ2□												
02□FJ3□	105 (4.14)	9 (0.35)	25 (0.99)	82 (3.23)	42 (1.65)	36 (1.42)	8 (0.32)	7 (0.28)	4 (0.16)	M6	12 (0.47)	4.2 (9.2)
02□FJ4□												
03BFJ1□	90 (3.55)	9 (0.35)	20 (0.79)	69 (2.72)	36 (1.42)	32 (1.26)	6 (0.24)	6 (0.24)	3.5 (0.14)	M5	10 (0.39)	3.4 (7.5)
03BFJ2□	105 (4.14)		25 (0.99)	82 (3.23)	42 (1.65)	36 (1.42)	8 (0.32)	7 (0.28)	4 (0.16)	M6	12 (0.47)	4.3 (9.5)
03BFJ3□	120 (4.73)	11 (0.43)	32 (1.26)	93 (3.66)	58 (2.29)	50 (1.97)	10 (0.39)	8 (0.32)	5 (0.20)	M8	16 (0.63)	6.4 (14.1)
03BFJ4□												
04AFJ1□	90 (3.55)	9 (0.35)	20 (0.79)	69 (2.72)	36 (1.42)	32 (1.26)	6 (0.24)	6 (0.24)	3.5 (0.14)	M5	10 (0.39)	3.4 (7.5)
04AFJ2□	105 (4.14)		25 (0.99)	82 (3.23)	42 (1.65)	36 (1.42)	8 (0.32)	7 (0.28)	4 (0.16)	M6	12 (0.47)	4.33 (9.5)
04AFJ3□	120 (4.73)	11 (0.43)	32 (1.26)	93 (3.66)	58 (2.29)	50 (1.97)	10 (0.39)	8 (0.32)	5 (0.20)	M8	16 (0.63)	6.4 (14.1)
04AFJ4□												
08AFJ1□	105 (4.14)	9 (0.35)	25 (0.99)	82 (3.23)	42 (1.65)	36 (1.42)	8 (0.32)	7 (0.28)	4 (0.16)	M6	12 (0.47)	6 (1.3)
08AFJ2□	120 (4.73)	11 (0.43)	32 (1.26)	93 (3.66)	58 (2.29)	50 (1.97)	10 (0.39)	8 (0.32)	5 (0.20)	M8	16 (0.63)	7.5 (16.5)
08AFJ3□	145 (5.71)	14 (0.55)	40 (1.58)	134 (5.28)	60 (2.36)	45 (1.77)	12 (0.47)			M10	20 (0.79)	12.4 (27.3)
08AFJ4□												

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

- Details of Motor and Encoder Plugs (Common for 30 W (0.04 HP) to 750 W (1.01 HP)
  The details of motor and encoder plugs are the same as those for standard servomotors.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.4.2 Servopack Dimensional Drawings


1) The dimension drawings of the SGDL Servopack are broadly grouped according to capacity into the following three categories.

a) 200V, 30W (0.04 HP) to 200 W (0.27HP) (Type: SGDL-A3AS to 02AS)
100V, 30W (0.04 HP) to 100 W (0.13HP) (Type: SGDL-A3BS to 01BS)

b) 200V, 400W (0.53 HP) (Type: SGDL-04AS)
100V, 200W (0.27 HP) (Type: SGDL-02BS)

c) 200V, 750W (1.01 HP) (Type: SGDL-08AS)
100V, 300W (0.40 HP) (Type: SGDL-03BS)


a) SGDL-A3AS to 02AS (200V, 30 (0.04 HP) to 200 W (0.27HP))
SGDL-A3BS to 01BS (100V, 30 (0.04 HP) to 100 W (0.13HP))

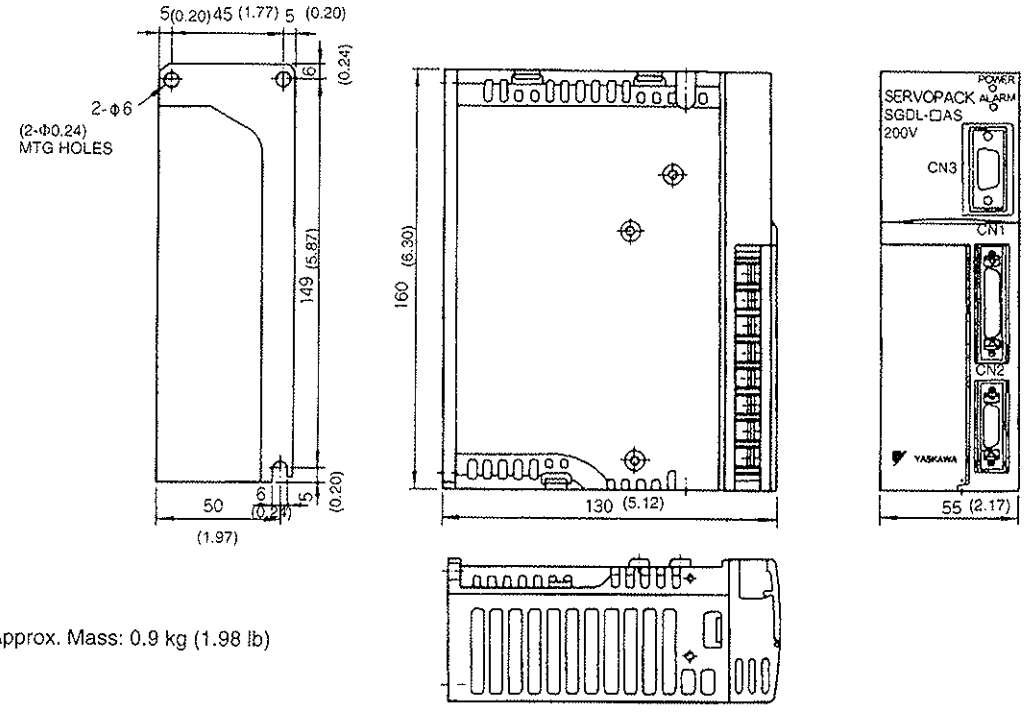



Approx. Mass: 0.9 kg (1.98 lb)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


b) SGDL-04AS (200V, 400W (0.53 HP))
SGDL-02BS (100V, 200W (0.27 HP))

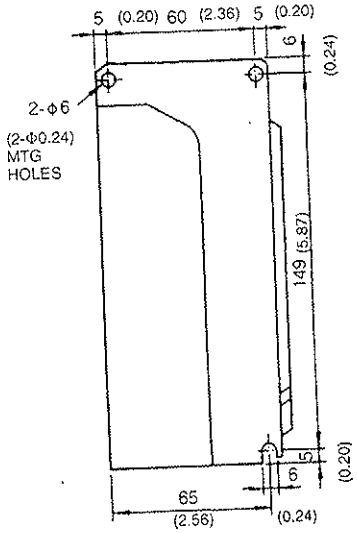

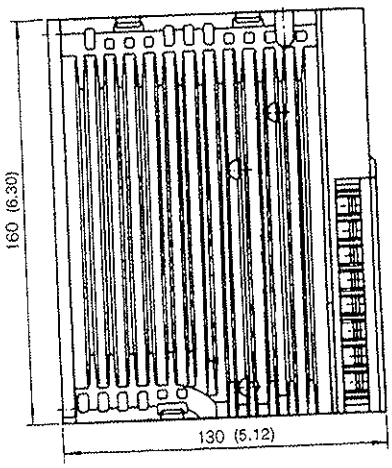

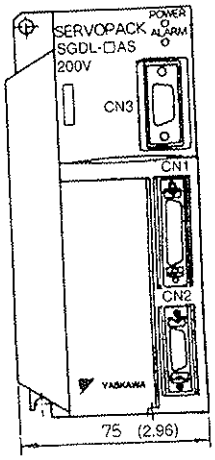

Approx. Mass: 1.2 kg (2.65 lb)




4

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.4.2 Servopack Dimensional Drawings cont.

c) SGDL-08AS (200V, 750W (1.01 HP))
SGDL-03BS (100V, 300W (0.40 HP))

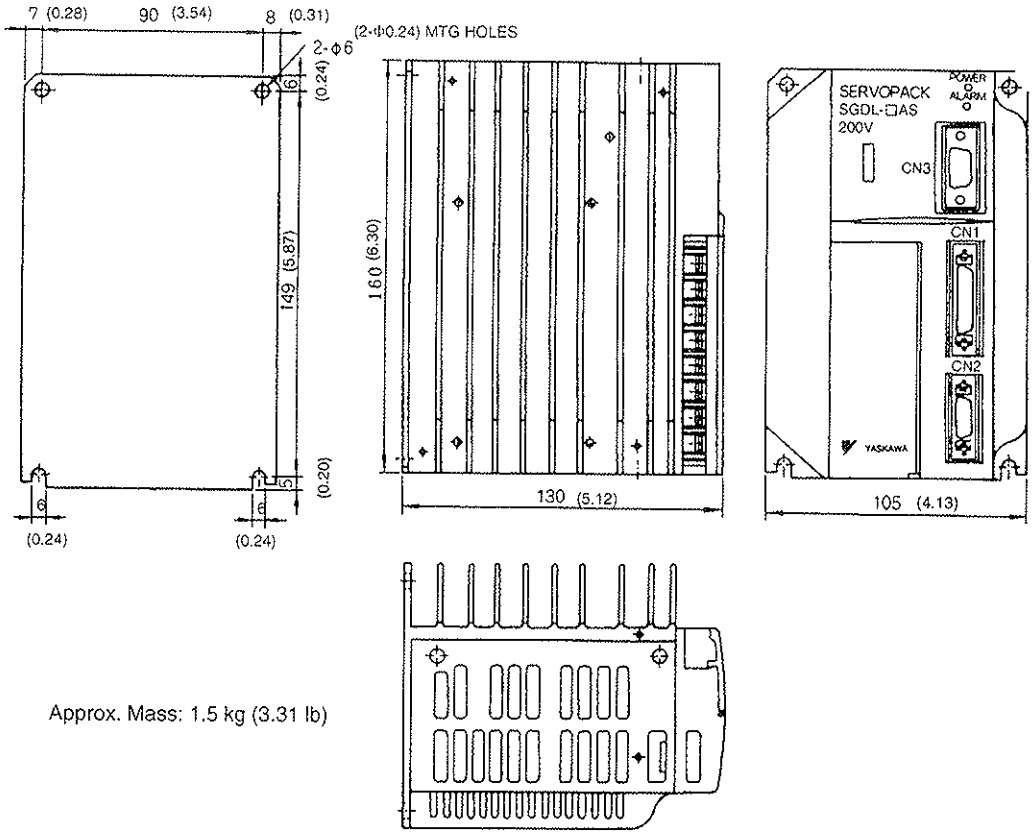

Approx. Mass: 1.5 kg (3.31 lb)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


4.4.3 Digital Operator Dimensional Drawings


1) The following two types of Digital Operator are available.

a) JUSP-OP02A-1 Hand-held Type

b) JUSP-OP03A Mount Type


a) JUSP-OP02A-1

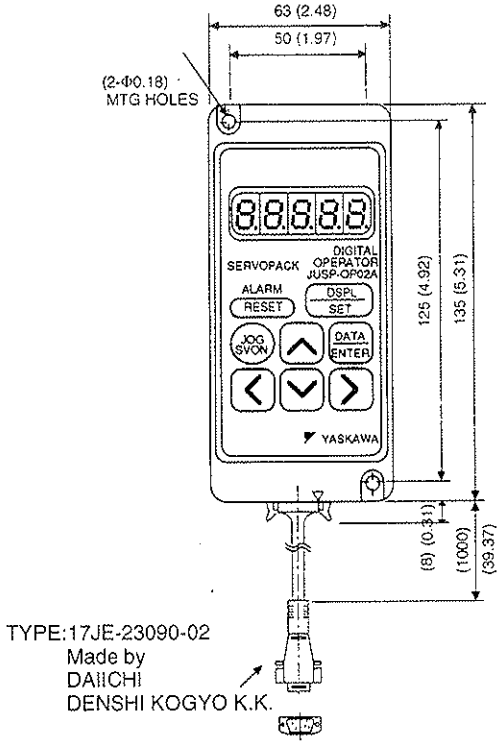



Approx. Mass: 0.18 kg (0.40 lb)

b) JUSP-OP03A

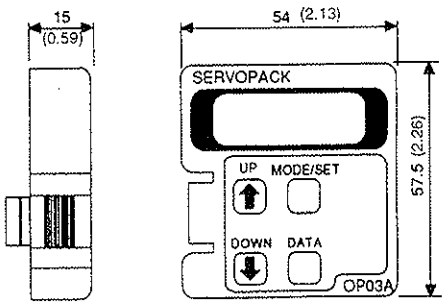

Approx. Mass: 0.02 kg (0.041lb)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.5 Selecting Peripheral Devices

This section shows how to select peripheral devices using flowcharts.

4.5.1 Selecting Peripheral Devices 182

4.5.1 Selecting Peripheral Devices


Select the peripheral devices using the flowcharts on the subsequent pages.

The items below are not included in the flowcharts. Refer to *4.6 Specifications and Dimensional Drawings of Peripheral Devices*.


- Cables for connecting PC and Servopack

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


<Flowchart for peripheral device selection>

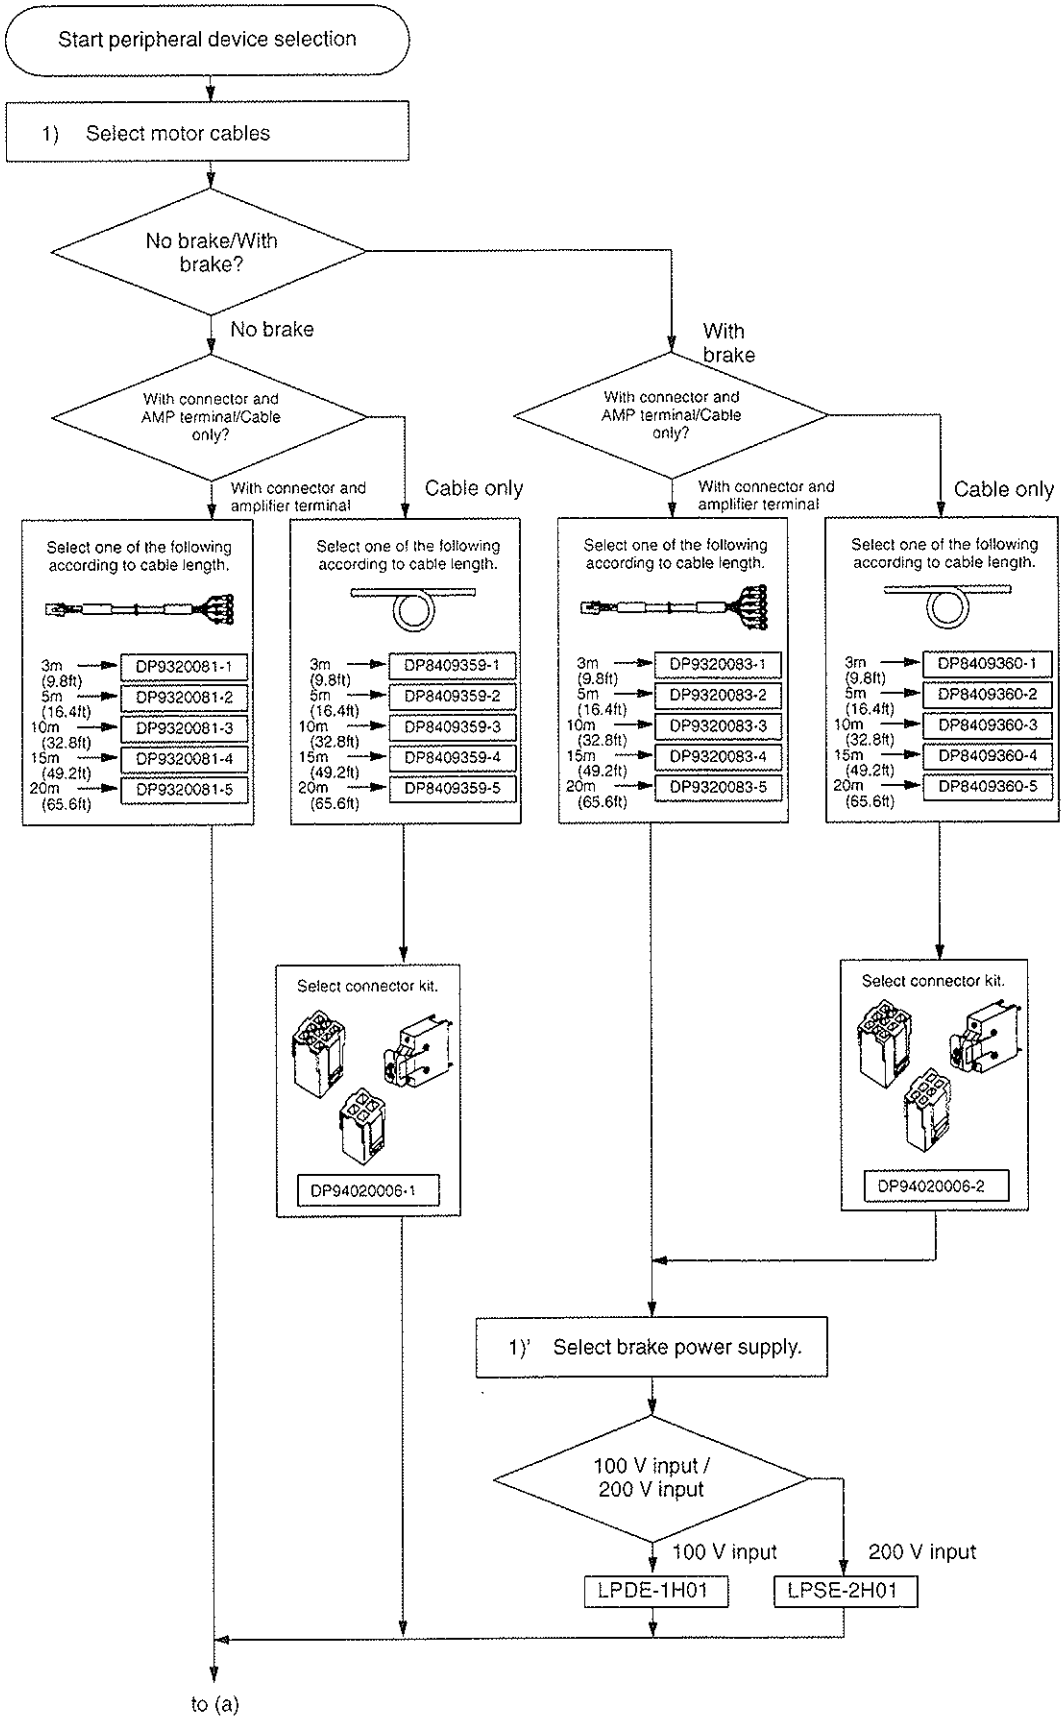


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

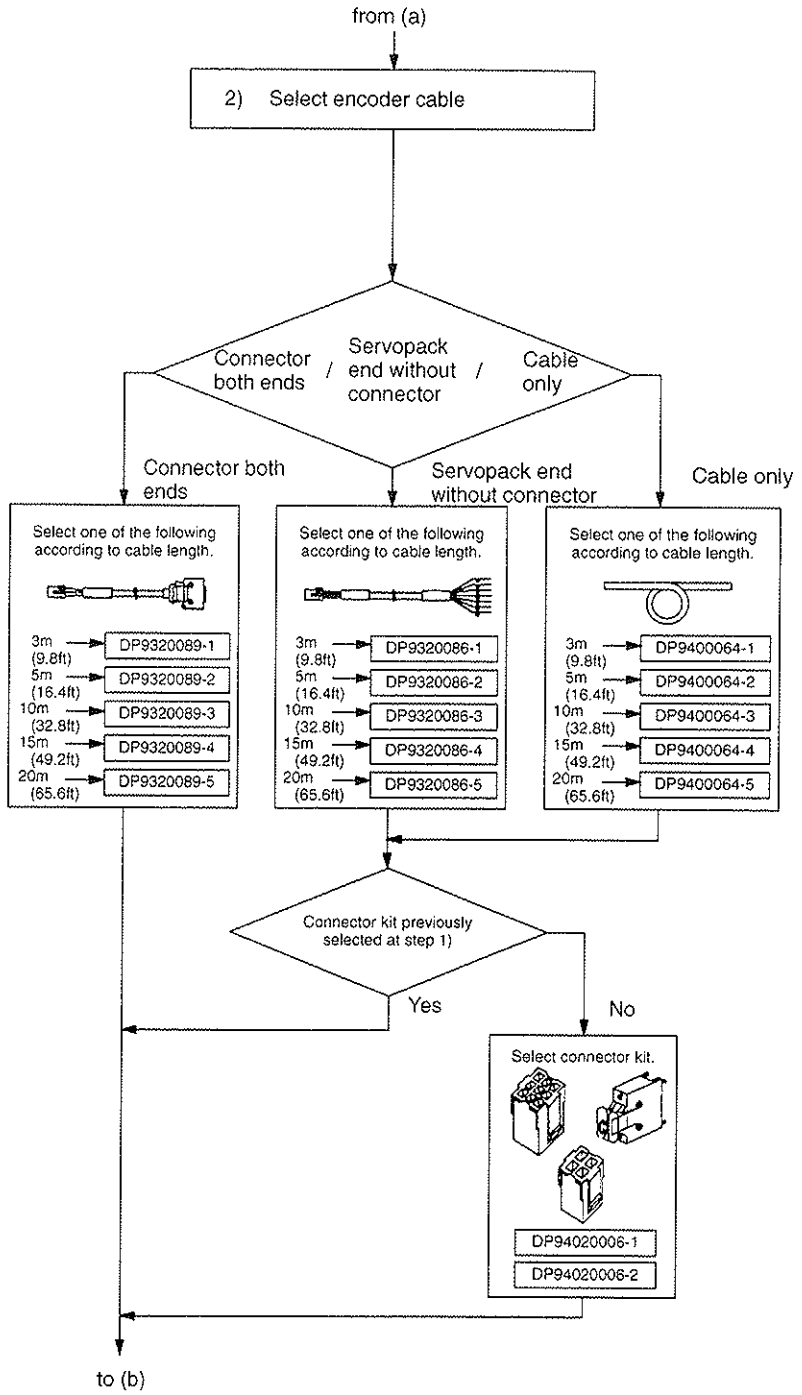

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

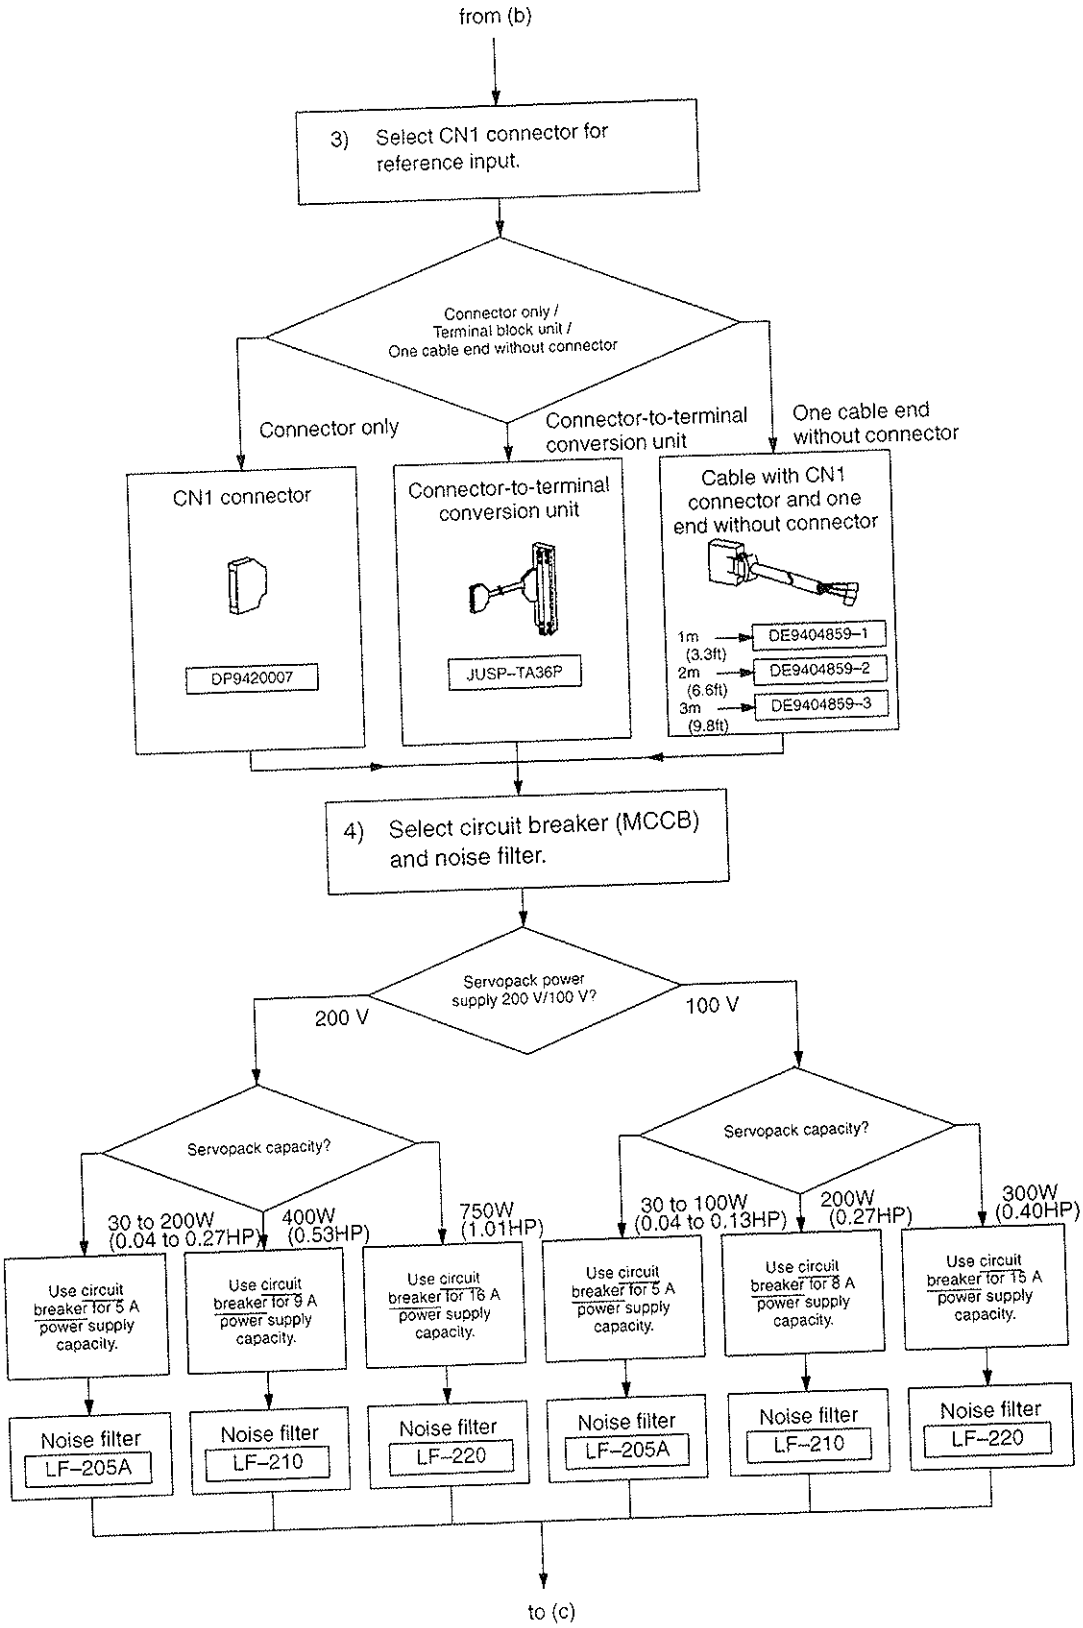

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

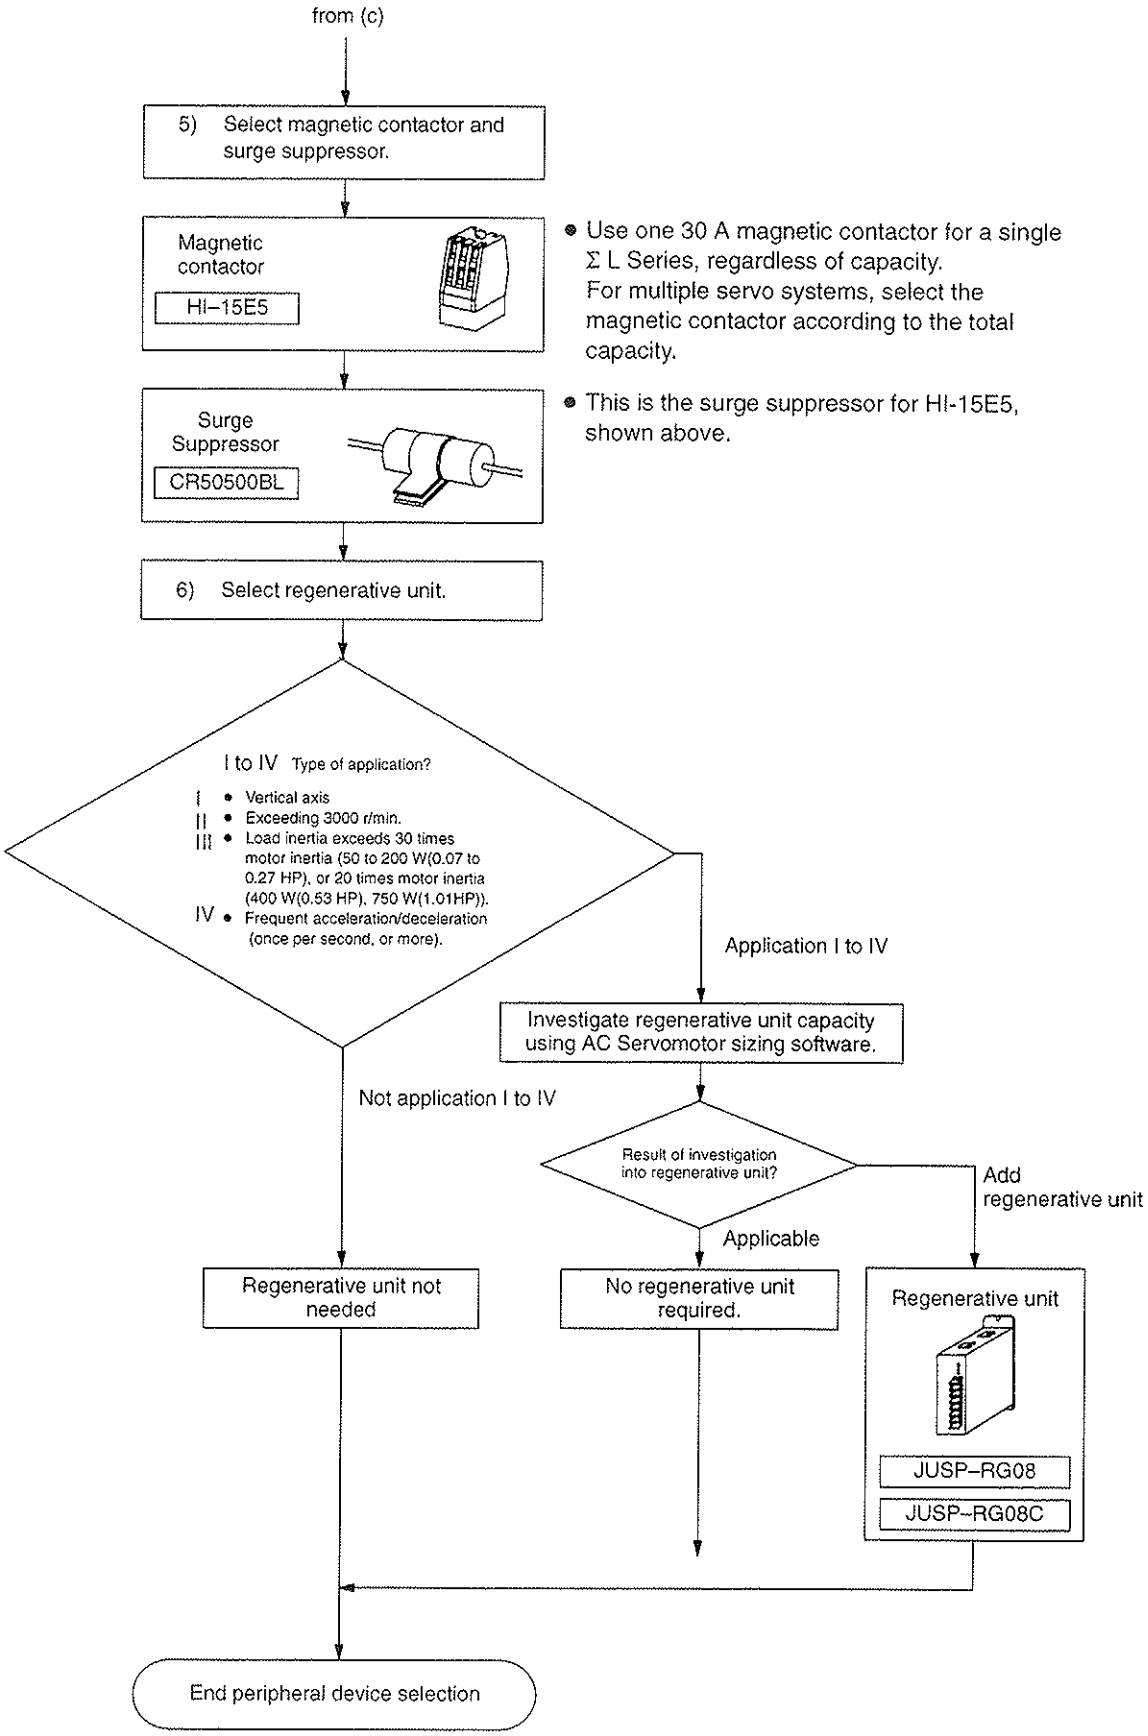

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.6 Specifications and Dimensional Drawings of Peripheral Devices

This section shows the specifications and dimensional drawings of the peripheral devices required for the Σ-L Series servo system. The sequence of peripheral devices is given by the Flowchart for Peripheral Device Selection in *4.5 Selecting Peripheral Devices*.

4.6.1 Cable Specifications and Peripheral Devices 187
4.6.2 Motor Cables 190
4.6.3 Connector Kits 193
4.6.4 Brake Power Supply 197
4.6.5 Encoder Cables 199
4.6.6 CN1 Connector 203
4.6.7 Connector Terminal Block Converter Unit 205
4.6.8 Cable With CN1 Connector and One End Without Connector 207
4.6.9 Circuit Breaker 207
4.6.10 Noise Filter 208
4.6.11 Magnetic Contactor 209
4.6.12 Surge Suppressor 210
4.6.13 Regenerative Unit 211
4.6.14 Cables for Connecting PC and Servopack 213

4.6.1 Cable Specifications and Peripheral Devices

1) The rated current of the SGDL Servopack external terminals, cable size, and peripheral devices are listed in the next table.
The cable specifications and size are selected according to the operating environment and current capacity.
The cable specifications were selected under conditions of three cables per bundle at 40° C ambient temperature, with the rated current flowing.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.6.1 Cable Specifications and Peripheral Devices

Type	Servopack Type SGDL-		Main circuit power input terminal (R) (T)		Motor connection terminals (U) (V) (W) ⏚		Power Supply capacity per Servopack*1 kVA	MCCB or fuse capacity*2 A	Noise filter type (reference diagram)	Recommended noise filter*3		Power ON/OFF switch
			Rated current A(rms)	Cable spec.	Rated current A (rms)	Cable spec.				Type	Spec.	
For 200 V	30 W (0.04HP)	A3AS	1.3	HIV 1.25 min.	0.42	Use Yaskawa cable. See 4.6.2 *Motor Cables* below for details.	0.25	5	Applicable 	LF-205A	Single-phase 200 VAC Class, 5 A	Yaskawa HI-15E5 (30 A), or equivalent
	50 W (0.07HP)	A5AS	1.5		0.6		0.3					
	100 W (0.13HP)	01AS	2.5		0.87		0.5					
	200 W (0.27HP)	02AS	4.0		2.0		0.75					
	400 W (0.53HP)	04AS	6.0	HIV 2.0 min.	2.6	When selecting non-Yaskawa cables, check the cable current rating and consider the operating environment.	1.2	9		LF-210	Single-phase 200 VAC Class, 10 A	
	750 W (1.01HP)	08AS	11.0		4.4		2.2	16		LF-220	Single-phase 200 VAC Class, 20 A	
For 100 V	30 W (0.04HP)	A3BS	2.0	HIV 1.25 min.	0.63		0.25	5		LF-205A	Single-phase 200 VAC Class, 5 A	
	50 W (0.07HP)	A5BS	2.6		0.9		0.3					
	100 W (0.13HP)	01BS	4.5		2.2	Use cable size AWG22 to AWG18 (0.3 to 0.89 mm^2).	0.5					
	200 W (0.27HP)	02BS	8.0	HIV 2.0 min.	2.7		0.75	8		LF-210	Single-phase 200 VAC Class, 10 A	
	300 W (0.40HP)	03BS	14.0		3.7		1.4	15		LF-220		

*1 Value at rated load.

*2 Braking characteristics (at 25°C): 200% for 2 s min., 700% for 0.01 s min.

*3 Yaskawa recommends noise filters manufactured by Tokin Corp. Yaskawa Controls Co., Ltd. can supply these noise filters.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2) The types of cable are shown in the table below. Use it in combination with the table above.

Cable Type		Conductor Allowable Temperature °C
Symbol	Name	
PVC	Normal vinyl cable	---
IV	600 V vinyl cable	60
HIV	Temperature-resistant vinyl cable	75

Note 1) Use cable with 600 V min. withstand voltage for main circuits.

2) Consider allowable current reduction ratio if cables are bundled in PVC or metal ducts.

3) Use temperature-resistant cable under high ambient or panel temperature where normal vinyl cables rapidly deteriorate.

3) The appropriate cables for Servopack connectors CN1 and CN2 are shown in the table below.

Control I/O Signal Connector	**CN1**	Cable	Use twisted-pair cable or twisted-pair shielded cable.
		Applicable Cable	AWG24,26,28,30
		Finished Cable Dimensions	Ø16.0 mm (Ø 0.63 in.)MAX.
PG Signal Connector	**CN2**	Cable	Use Yaskawa cable. Use twisted-pair shielded cable if Yaskawa cable is not used.
		Applicable Cable	Applicable cable types: AWG24, 26, 28, 30. However, use AWG22 for encoder power supply and FG line. Use AWG26 for other signals. These connections permit wiring distances up to 20 m (65.6 ft).
		Finished Cable Dimensions	Ø11.6(Ø0.46 in.) mm MAX.

Note Cable selection conditions: three cables per bundle at 40 °C ambient temperature, with the rated current flowing.


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.6.2 Motor Cables

1) The dimensions and appearance of the motor cables are shown below. Specify the cable type when ordering.


a) Cables For Motor Without Brake (with connector and AMP terminals)

Type	L in mm (feet)
DP9320081-1	3000^{+100}_{0} ($10^{+0.33}_{0}$)
DP9320081-2	5000^{+100}_{0} ($16.7^{+0.33}_{0}$)
DP9320081-3	10000^{+500}_{0} ($33.3^{+1.67}_{0}$)
DP9320081-4	15000^{+500}_{0} ($50^{+1.67}_{0}$)
DP9320081-5	20000^{+500}_{0} ($66.7^{+1.67}_{0}$)

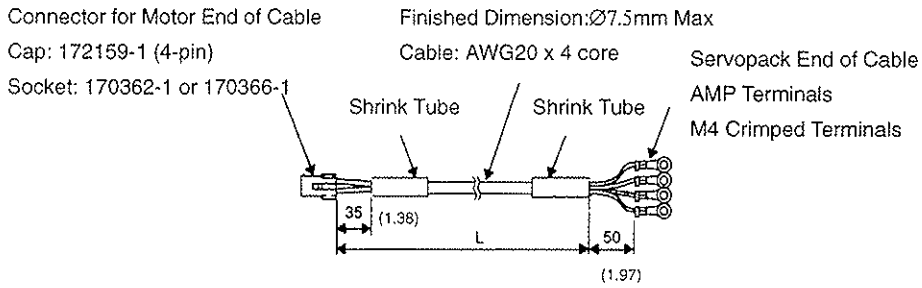


b) Cables For Motor With Brake (with connector and AMP terminals)

Type	L in mm (feet)
DP9320083-1	3000^{+100}_{0} ($10^{+0.33}_{0}$)
DP9320083-2	5000^{+100}_{0} ($16.7^{+0.33}_{0}$)
DP9320083-3	10000^{+500}_{0} ($33.3^{+1.67}_{0}$)
DP9320083-4	15000^{+500}_{0} ($50^{+1.67}_{0}$)
DP9320083-5	20000^{+500}_{0} ($66.7^{+1.67}_{0}$)

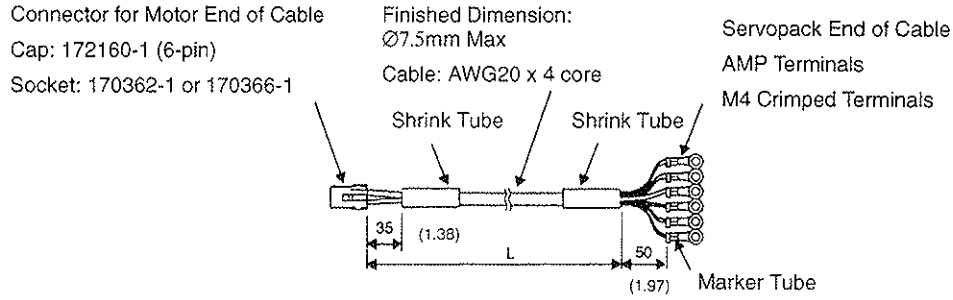

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

c) Cables For Motor Without Brake
(Cable Only)




Type	L in mm (feet)
DP8409359-1	3000^{+100}_{0} ($10^{+0.33}_{0}$)
DP8409359-2	5000^{+100}_{0} ($16.7^{+0.33}_{0}$)
DP8409359-3	10000^{+500}_{0} ($33.3^{+1.67}_{0}$)
DP8409359-4	15000^{+500}_{0} ($50^{+1.67}_{0}$)
DP8409359-5	20000^{+500}_{0} ($66.7^{+1.67}_{0}$)

*


AMP Connector
Cap: 172159-1
Socket: 170362-1 or 170366-1 (Manufactured by AMP.)

*

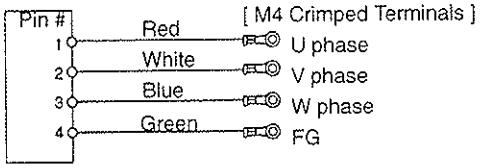


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

d) Cables For Motor With Brake
(Cable Only)



Type	L in mm (feet)
DP8409360-1	3000^{+100}_{0} ($10^{+0.33}_{0}$)
DP8409360-2	5000^{+100}_{0} ($16.7^{+0.33}_{0}$)
DP8409360-3	10000^{+500}_{0} ($33.3^{+1.67}_{0}$)
DP8409360-4	15000^{+500}_{0} ($50^{+1.67}_{0}$)
DP8409360-5	20000^{+500}_{0} ($66.7^{+1.67}_{0}$)

AMP Connector
Cap: 172160-1
Socket: 170362-1 or 170366-1 (Manufactured by AMP.) *

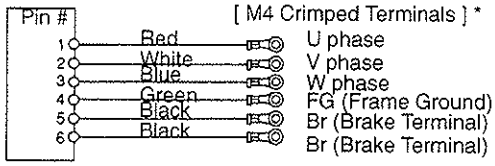


* If cable only is ordered, purchase the AMP connector and M4 crimped terminals separately. Refer to *4.6.3 Connector Kits* for details about caps and sockets.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


4.6.3 Connector Kits

1) A connector kit comprises three connectors as shown in the diagram below: one encoder connector at both the motor and Servopack ends of the cable and a motor connector for the motor end of the cable.


Encoder Connector for Motor End of Cable



Encoder Connector for Servopack End of Cable



Motor Connector for Motor End of Cable



Two types of connector kit are available according to the following information:


- Is the motor with or without a brake?


A connector kit is required in the following cases:

a) If motor cable only is purchased (whether or not motor has a brake).

b) If the encoder cable with a motor connector only and Servopack end without connector, or encoder cable only is purchased.

2) Select the following encoder cable connector.







Cap: 172161-1
Socket: 170365-1

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

3) Select one of the following two types of motor cable connector.

a) Motor Without Brake







Cap: 172159-1

Socket: 170362-1 or 170366-1

b) Motor With Brake






Cap: 172160-1

Socket: 170362-1 or 170366-1

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4) Only one type of encoder connector is available for the Servopack end of the cable.

• Connector

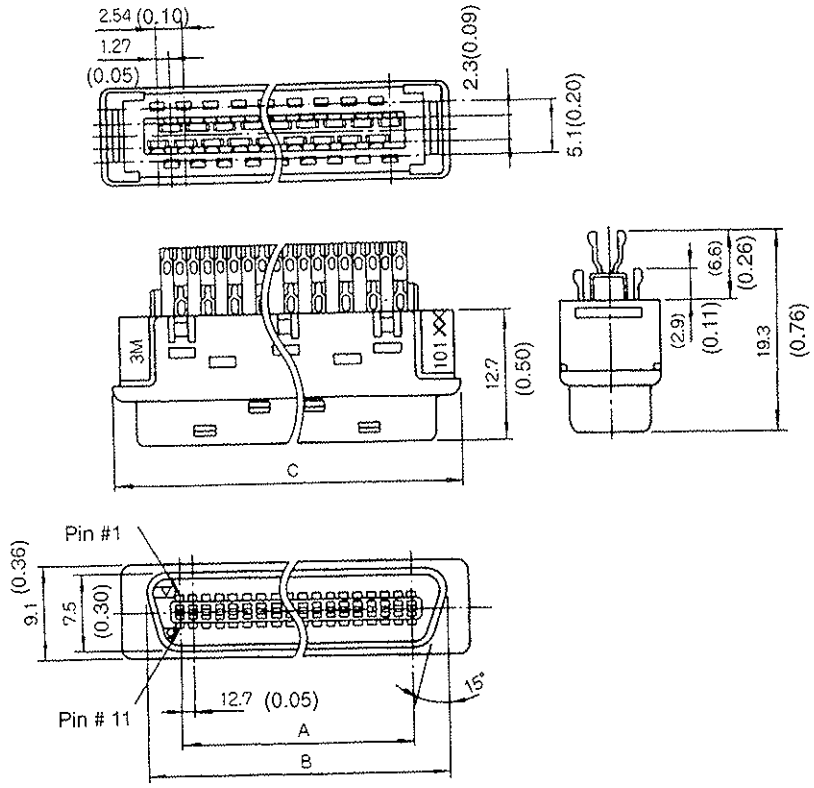


Units: mm (inches)

Connector Type	A	B	C
10120-3000VE	11.43(0.45)	17.6(0.69)	22.0(0.87)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

• Case

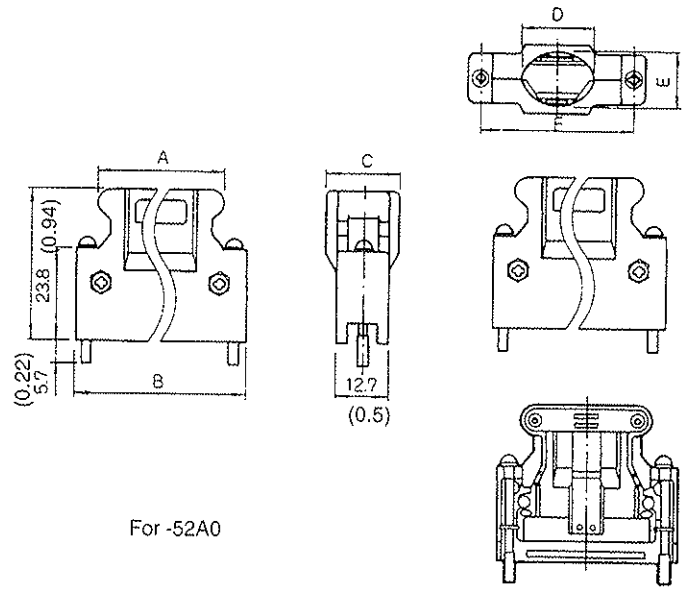

For -52A0

Diagram of Assembled Connector (for reference)

Units: mm (inches)

Connector	Case	A	B	C	D	E	F
10120-3000VE	10320-52A0-008	22.0 (0.87)	18.0 (0.71)	14.0 (0.55)	12.0 (0.47)	10.0 (0.39)	27.4 (1.08)

5) The types of connector kit are shown below. Select the type of connector kit according to the connectors selected in (2), (3), and (4) above.

Connector Kit Type	Application		Connector Kit Part List											
	Encoder/Motor Cable		For Encoder Cable								For Motor Cable			
			Encoder End				Servopack End							
	Encoder Type	Motor Brake With/ Without	Cap		Socket		Connector		Case		Cap		Socket	
			Type	Qty	Type	Qty	Type	Qty	Type	Qty	Type	Qty	Type	Qty
DP9420006-1	Incremental	Without	*1 172161-1	1	*1 170365-1	*3 10	*2 10120-3000VE	1	*2 10320-52A0-008	1	*1 172159-1	1	*1 170366-1	*3 5
DP9420006-2	Incremental	With									*1 172160-1	1		*3 7

*1 Manufactured by AMP.

*2 Manufactured by 3M.


*3 Including one spare.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.6.4 Brake Power Supply


1) Brake power supplies are available for 200 V and 100 V input.

200 VAC Input: LPSE-2H01
100 VAC Input: LPDE-1H01



Use for Servomotor with brake.

- Dimensional Drawings

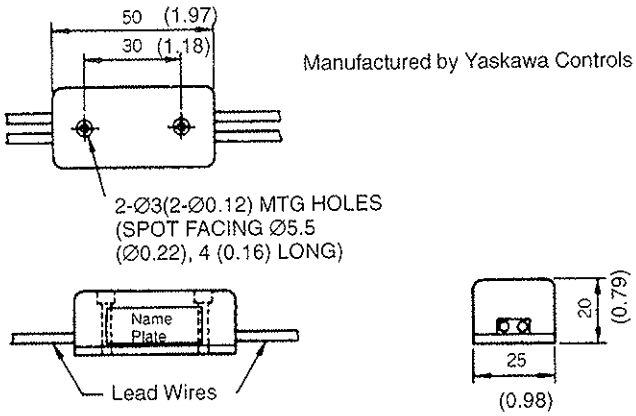

Manufactured by Yaskawa Controls Co., Ltd.


- Lead Wire Length: 500 mm each (19.69 in.)
- Max. Ambient Temperature: 60°C
- Lead Wires: Color Coded

AC Input		Brake
100V	200V	
Blue/White	Yellow/White	Red/Black


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2) The internal circuits are shown below. While it is possible to switch either the AC or DC side of the brake power supply, it is normally safer to switch the AC side. If the DC side is to be switched, install a surge suppressor near the brake coil to prevent the surge voltages due to switching the DC side damaging the brake coil.

• Internal Circuit for 200 VAC Input (LPSE-2H01)

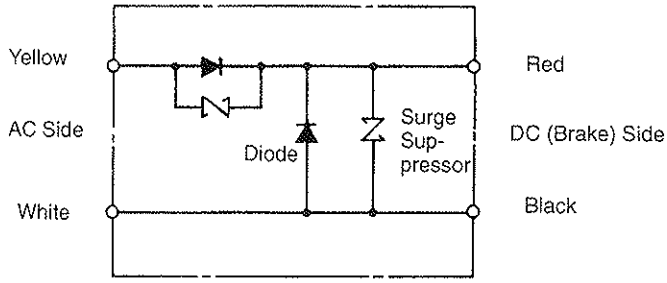

• Internal Circuit for 100 VAC Input (LPDE-1H01)

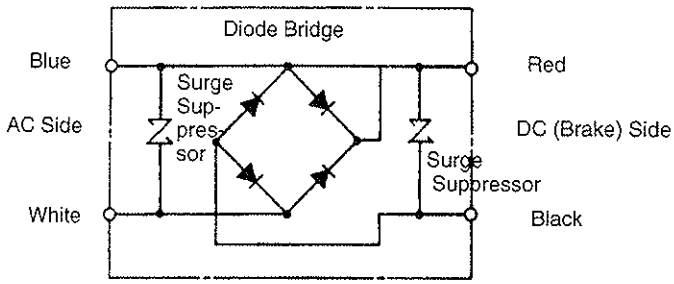


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.6.5 Encoder Cables

1) The dimensions and appearance of the encoder cables are shown below. Specify the cable type when ordering.


a) Connector Both Ends

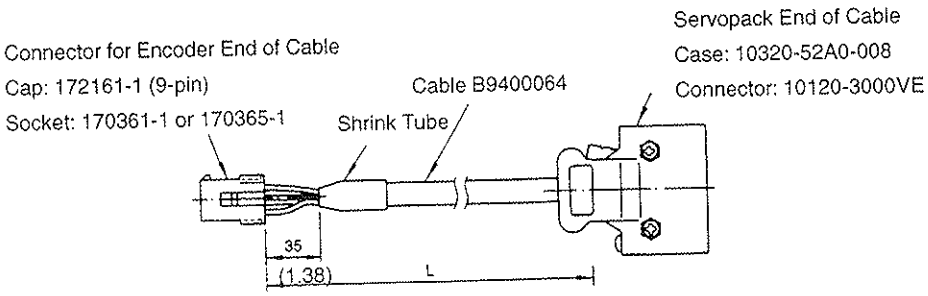

Type	L in mm (feet)
DP9320089-1	3000^{+100}_{0} ($10^{+0.33}_{0}$)
DP9320089-2	5000^{+100}_{0} ($16.7^{+0.33}_{0}$)
DP9320089-3	10000^{+500}_{0} ($33.3^{+1.67}_{0}$)
DP9320089-4	15000^{+500}_{0} ($50^{+1.67}_{0}$)
DP9320089-5	20000^{+500}_{0} ($66.7^{+1.67}_{0}$)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


b) Servopack End without Connector

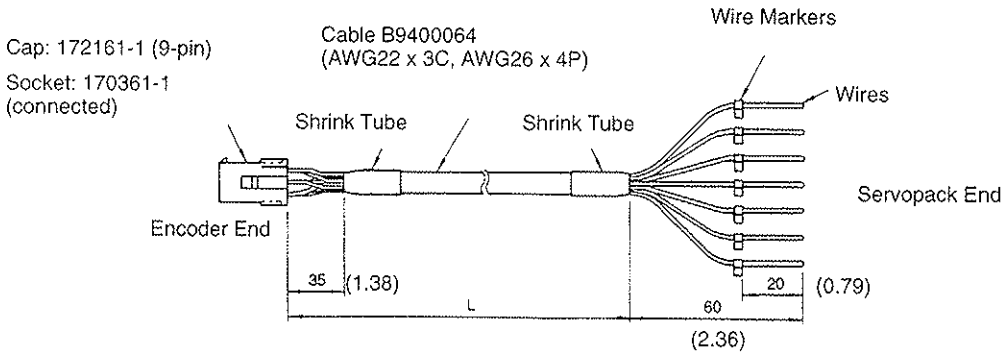

Type	L in mm (feet)
DP9320086-1	$3000\ ^{+100}_{0}$ ($10\ ^{+0.33}_{0}$)
DP9320086-2	$5000\ ^{+100}_{0}$ ($16.7\ ^{+0.33}_{0}$)
DP9320086-3	$10000\ ^{+500}_{0}$ ($33.3\ ^{+1.67}_{0}$)
DP9320086-4	$15000\ ^{+500}_{0}$ ($50\ ^{+1.67}_{0}$)
DP9320086-5	$20000\ ^{+500}_{0}$ ($66.7\ ^{+1.67}_{0}$)

[Case: 10320-52A0-008 (Manufactured by 3M.)
Connector: 10120-3000VE (Manufactured by 3M.)]*

Cap: 172161-1
Socket: 170361-1

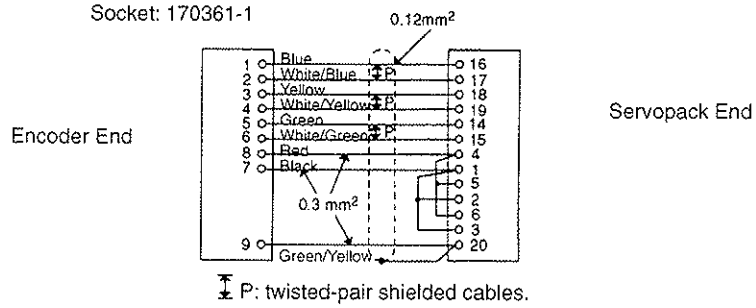


P: twisted-pair shielded cables.

*Purchase cases and connectors separately. Refer to *4.6.3 Connector Kits* for details.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

c) Cable Only

Cable AWG22 x 3C, AWG26 x 4P



Type	L in mm (feet)
B9400064-1	3000^{+100}_{0} ($10^{+0.33}_{0}$)
B9400064-2	5000^{+100}_{0} ($16.7^{+0.33}_{0}$)
B9400064-3	10000^{+500}_{0} ($33.3^{+1.67}_{0}$)
B9400064-4	15000^{+500}_{0} ($50^{+1.67}_{0}$)
B9400064-5	20000^{+500}_{0} ($66.7^{+1.67}_{0}$)

Cap: 172161-1 (Manufactured by AMP.)


Socket: 170361-1 or 170365-1 (Manufactured by AMP.)

*

Case: 10320-52A0-008 (Manufactured by 3M.)

Connector: 10120-3000VE (Manufactured by 3M.)

*

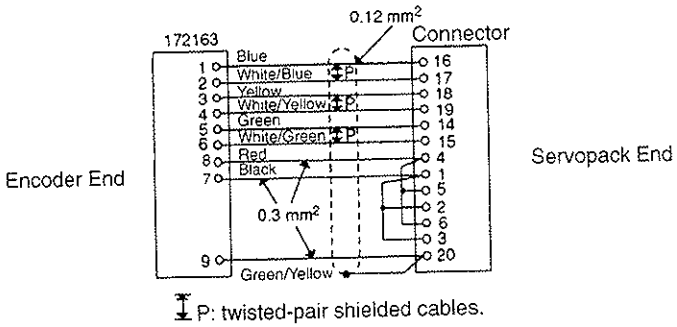


P: twisted-pair shielded cables.

* Purchase caps, sockets, cases, and connectors separately. Refer to *4.6.3. Connector Kits* for details.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2) Details of the encoder cables are summarized in the table below.
These cables are not supplied as accessories with a Servopack or Servomotor.
Purchase in standard specified lengths as required.

Cable Specification	Incremental Encoder (Yaskawa Drg. #B9400064)
Basic Specifications	Compound KQVV-SW AWG22 x 3C, AWG26 x 4P
Finished Dimension	Ø7.5 mm (Ø0.30 in.)
Internal Structure and Lead Colors	 A_1 Red A_2 Black A_3 Green/Yellow F_1 Blue – White/Blue (Twisted pair) F_2 Yellow – White/Yellow (Twisted pair) F_3 Green – White/Green (Twisted pair) F_4 Orange – White/Orange (Twisted pair)
Yaskawa standard specifications	Standard lengths: 3 m (9.8ft.) , 5 m (16.4ft.) , 10 m (32.8ft.), 15 m (49.2ft.), 20 m (65.6ft.) *

*When appropriate cable is used, the allowable wiring distance between Servopack and Servomotor (PG) is 20 m (65.6ft.) max.


Note See items a) and b) in this section for details about cables with connectors.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.6.6 CN1 Connector

1) This connector is required to connect the host controller to CN1 on the Servopack.

- Connector

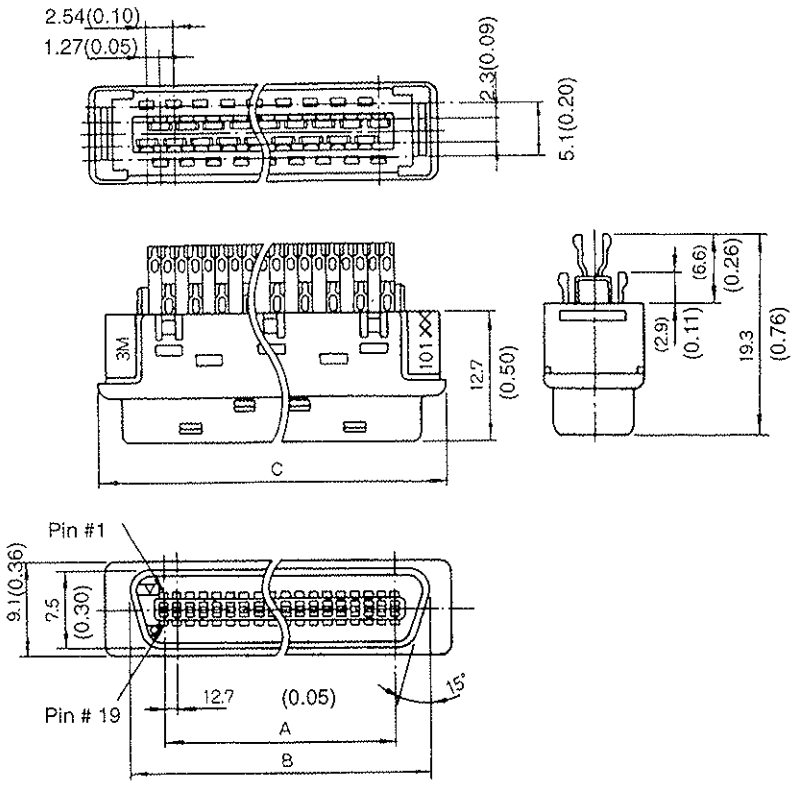


Units: mm (inches)

Connector Type	A	B	C
10136-3000VE	21.59 (0.85)	27.8 (1.09)	32.2 (1.27)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

• Case

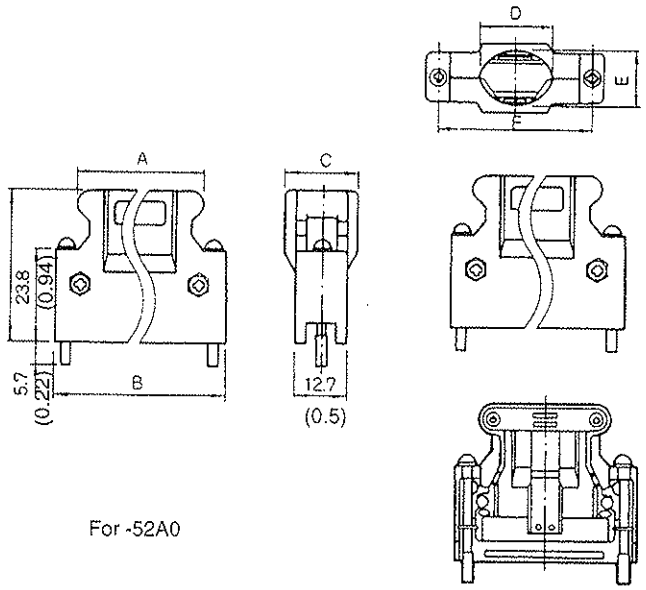

For -52A0

Diagram of Assembled Connector (for reference)

Units: mm (inches)

Connect or Type	Case Type	A	B	C	D	E	F
10136-3000VE	10336-52 A0-008	32.2 (1.27)	43.5 (1.71)	18.0 (0.71)	17.0 (0.67)	14.0 (0.55)	37.6 (1.48)

2) The CN1 connector type is shown below.


Connector Type	Application	Connector Part List			
		Connector		Case	
		Type	Qty	Type	Qty
DP9420007	I/O connector for CN1	10136-3000V E*	1	10336-52A0-008*	1

* Manufactured by 3M.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


4.6.7 Connector Terminal Block Converter Unit

1) A connector terminal block converter unit comprises a CN1 connector 0.5 m (1.64 ft) cable.
The terminal block numbers match the Servopack CN1 connector numbers.

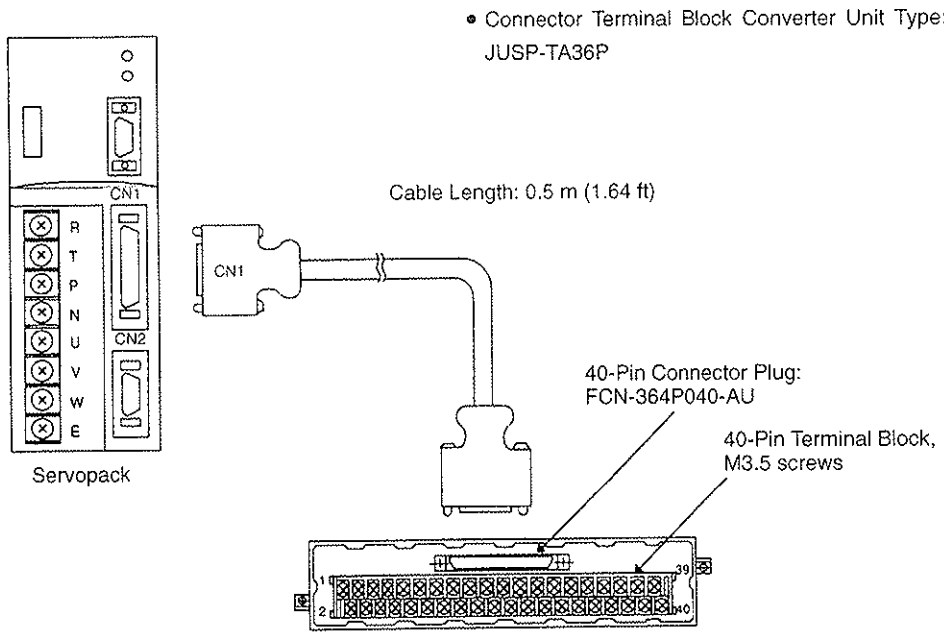

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2) The relationships between terminal block pin numbers and signal names are shown in the table below.

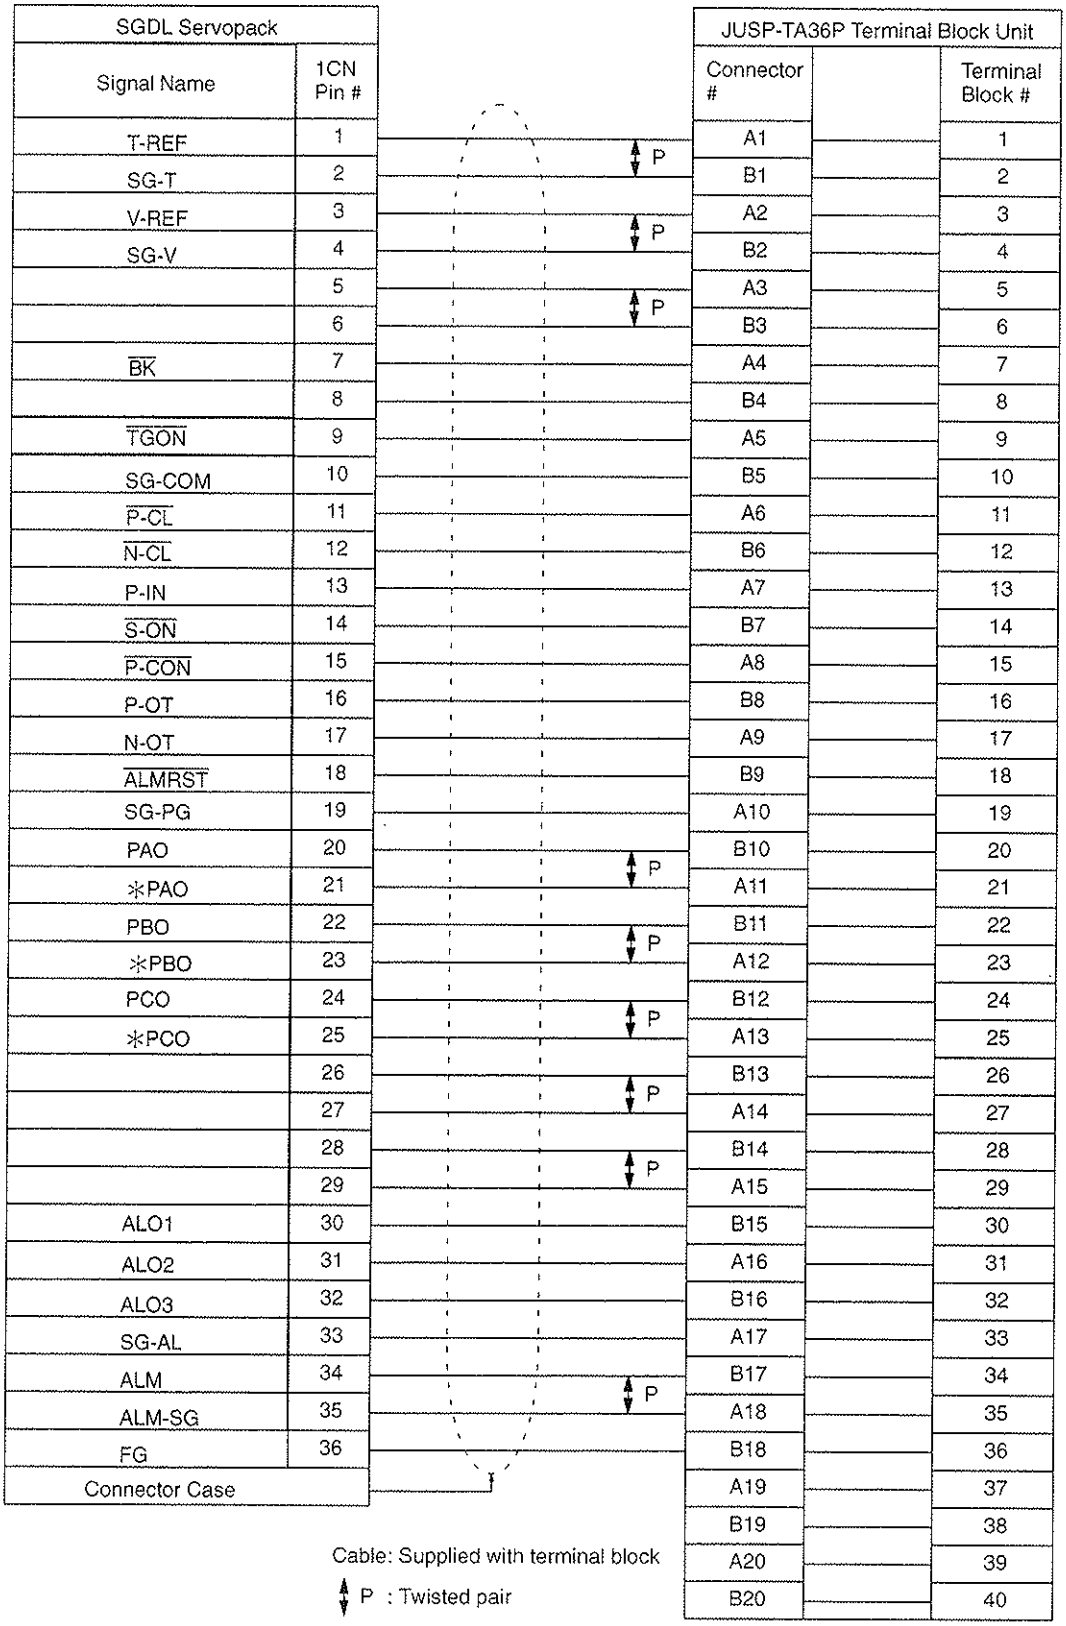

SGDL Servopack			JUSP-TA36P Terminal Block Unit		
Signal Name	1CN Pin #		Connector #		Terminal Block #
T-REF	1	P	A1		1
SG-T	2		B1		2
V-REF	3	P	A2		3
SG-V	4		B2		4
	5	P	A3		5
	6		B3		6
$\overline{BK}$	7		A4		7
	8		B4		8
$\overline{TGON}$	9		A5		9
SG-COM	10		B5		10
$\overline{P\text{-}CL}$	11		A6		11
$\overline{N\text{-}CL}$	12		B6		12
P-IN	13		A7		13
$\overline{S\text{-}ON}$	14		B7		14
$\overline{P\text{-}CON}$	15		A8		15
P-OT	16		B8		16
N-OT	17		A9		17
$\overline{ALMRST}$	18		B9		18
SG-PG	19		A10		19
PAO	20	P	B10		20
＊PAO	21		A11		21
PBO	22	P	B11		22
＊PBO	23		A12		23
PCO	24	P	B12		24
＊PCO	25		A13		25
	26	P	B13		26
	27		A14		27
	28	P	B14		28
	29		A15		29
ALO1	30		B15		30
ALO2	31		A16		31
ALO3	32		B16		32
SG-AL	33		A17		33
ALM	34	P	B17		34
ALM-SG	35		A18		35
FG	36		B18		36
Connector Case			A19		37
			B19		38
			A20		39
			B20		40


Cable: Supplied with terminal block

P : Twisted pair

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.6.8 Cable With CN1 Connector and One End Without Connector


1) Use a cable with no connector at the host controller end. The loose wires are marked with labels with terminal numbers indicated.

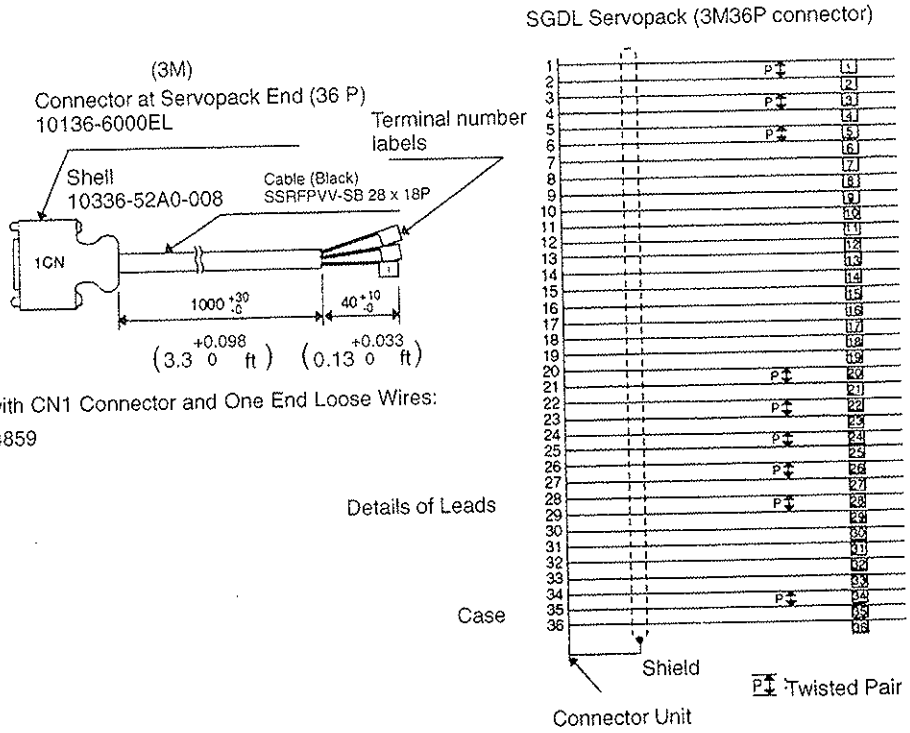

- Cable with CN1 Connector and One End Loose Wires: DE9404859

4.6.9 Circuit Breaker

1) The customer should purchase a circuit breaker (MCCB) of appropriate capacity.



- Recommended Product


  Ground fault detector for motor protection manufactured by Mitsubishi Electric Co. Ltd.
  Type: MN50-CF
  Rated Current: 7.1 A, 10 A, 16 A, 25 A, 32 A, 45A

Use to protect the power lines.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.6.10 Noise Filter

1) Select the noise filter from the following three types according to the Servopack capacity.




Install to eliminate external noise from the power lines.


Servopack Capacity	Noise Filter Type
30W(0.04 HP), 50W(0.07HP), 100W(0.13HP), 200W(0.27HP)	LF-205A
200W(0.27HP)(100V), 400W(0.53HP)	LF-210
300W(0.40HP)(100V), 750W(1.01HP)	LF-220

• Dimensional Diagrams

• LF-205A (Single-phase 200 VAC Class, 5 A)

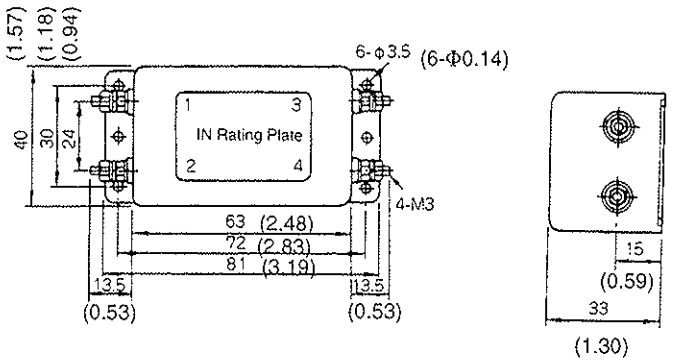


• LF-210 (Single-phase 200 VAC Class, 10 A)

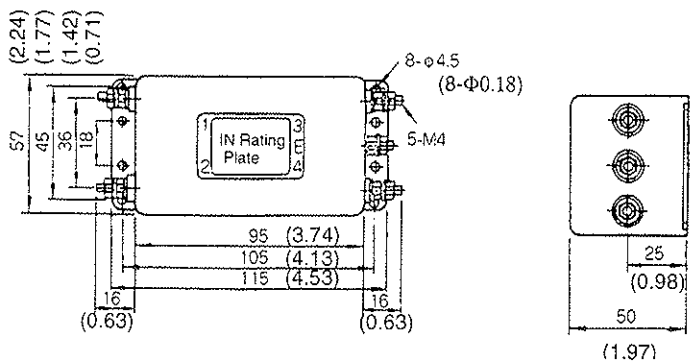


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

• LF-220 (Single-phase 200 VAC Class, 20 A)

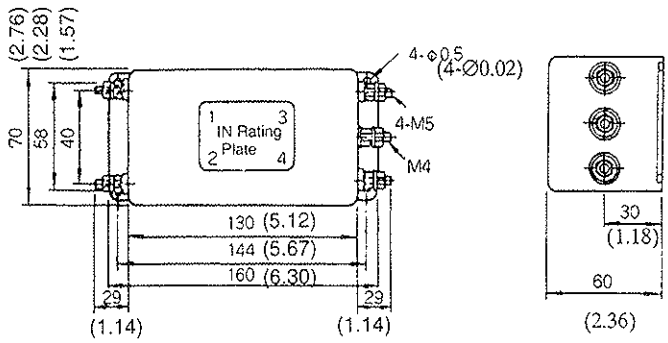

4.6.11 Magnetic Contactor

1) Use one 30 A magnetic contactor of the type shown below for a single Σ-L Series, regardless of capacity. For multiple servo systems, select the magnetic contactor according to the total capacity.




Type: HI-15E5 (30 A)

Turns servo ON and OFF.


(Note)Attach an appropriate surge suppressor to the magnetic contactor.

• Internal Connection Diagram

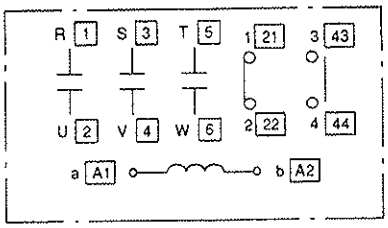


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

• Dimensional Diagram

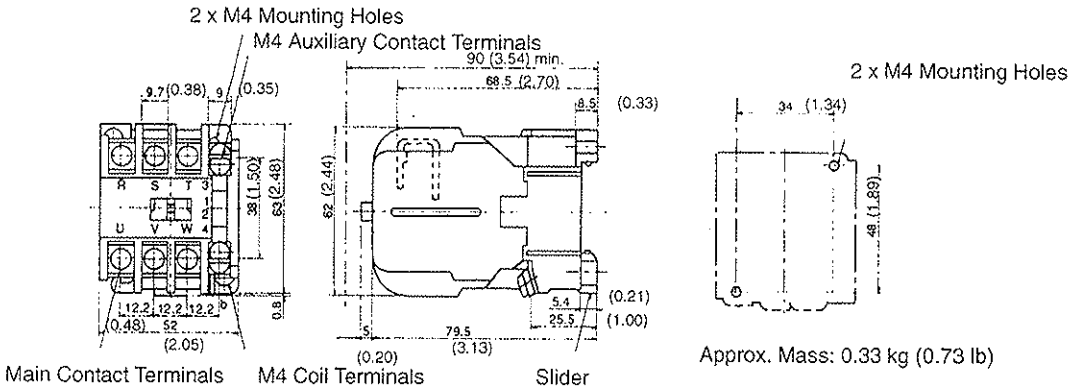

4.6.12 Surge Suppressor

1) Attach a surge suppressor to the magnetic contactor to prevent power supply noise and protect contacts.

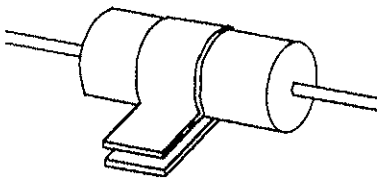

• Recommended Product

Spark Killer manufactured by Okaya Electric Industries Co., Ltd.
Type: CR50500BA (250 VAC)
Static Electricity Capacity: 0.5 μF ± 20%
Resistance: 50 Ω (1/2 W) ±30%


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.6.13 Regenerative Unit


1) JUSP–RG08 type

Dimensional drawings of the regenerative unit are shown below.

• Dimensional Drawings




Approx. Mass: 1 kg (2.20 lb)

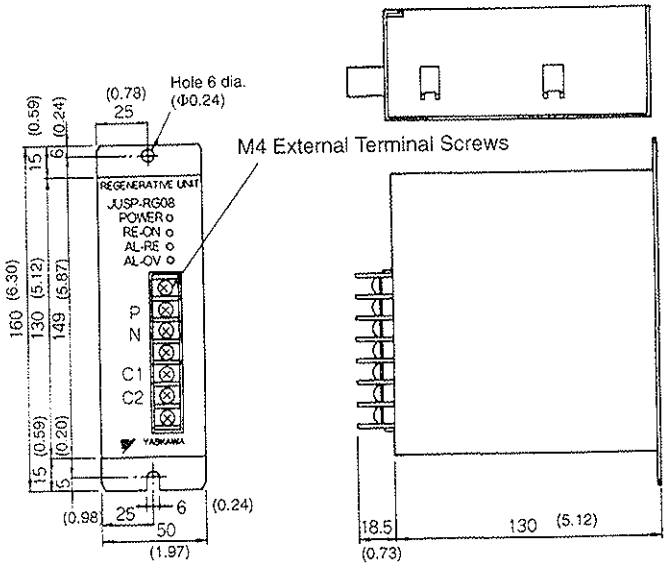


2) JUSP–RG08C type

JUSP–RG08C type is an exterior type regenerative unit. When regenerative ability of the built–in resistor is insufficient, install this regenerative unit to enhance the regenerative ability.

• Dimensional Drawings



Approx. Mass: 1 kg (2.20 lb)

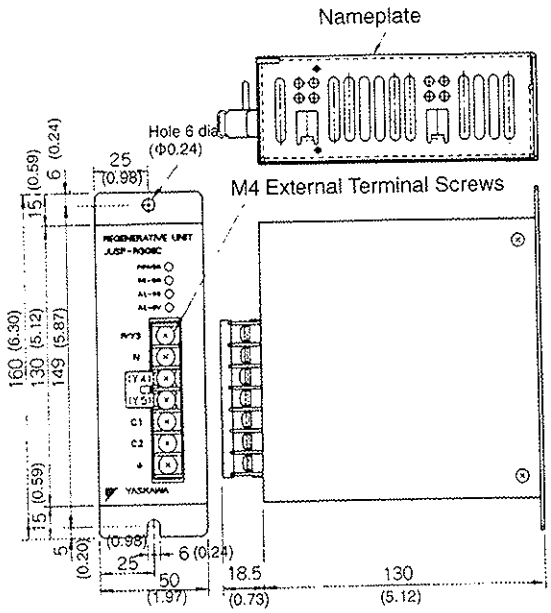

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


• Regenerative Unit Specifications

Type	JUSP-RG08 JUSP–RG08C	Remarks
Applicable Servopack	SGDL Servopack	
Regenerative Working Voltage	380Vdc	
Regenerative Processing Current	8Adc	Regenerative Resistance: 50 Ω, 60 W
Error Detection Function	Regenerative resistance disconnection, regenerative TR fault, overvoltage	
Alarm Output	Normally closed contact (open when protective function operates)	200 V operation OK
Dimensions in mm (inches)	55W × 160H × 130D (2.17W × 6.30H × 5.31D)	


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.6.14 Cables for Connecting PC and Servopack

1) Special cables for connecting a PC to a Servopack. Using these cables allows monitoring and setting of user constants with a PC.
PC software is available for these communications. Ask your Yaskawa representative for details. Operate the software as described in the manual supplied.

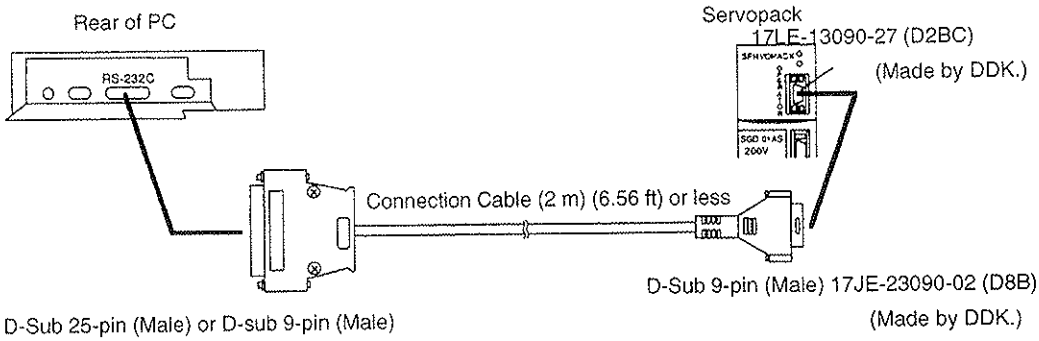

- Dimensional Drawings for Type DE9405258 (for NEC PC)

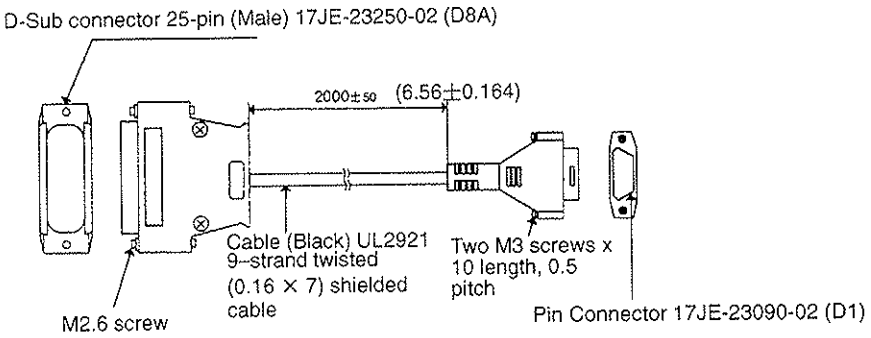


Note: Fold back the cable shielding at each end of the cable and secure it with clamps.

2) The communications specifications and connecting-circuit specifications are listed below.

- Baud Rate: 9600 bps
- Number of Bits Start: 1 bit
  Data: 7 bits
  Stop: 1 bit
  Parity: 1 bit (even)
- Synchronization: Start-Stop
- XON/XOFF Control: None
- Shift Control: None

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

• Communications Method: Semi-duplex

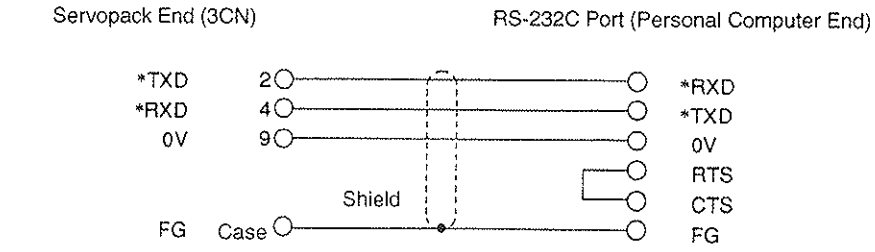


Note: Maximum cable length is 2 m (6.56 ft).

3) Connection is also possible to the RS-422A port. In this case, the connection circuit is as follows:

• Transmission Distance: 30 m (98.4 ft) max.

• Transmission System: RS-422A

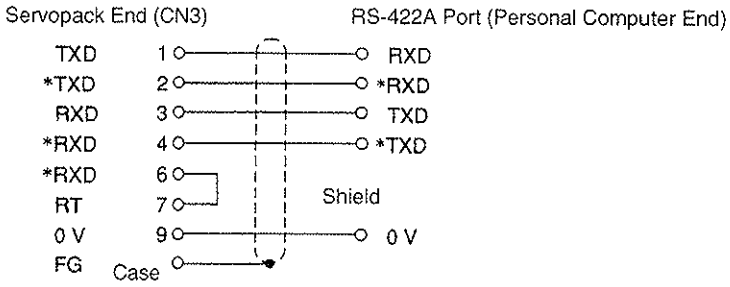

• Terminal Arrangement at Servopack End

Pin #	Signal Name	Signal Circuit Name	Signal Direction
1	TXD	Transmit data (not inverted)	P←S
2	*TXD	Transmit data (inverted)	P←S
3	RXD	Receive data (not inverted)	P→S
4	*RXD	Receive data (inverted)	P→S
5	OPH		#
6	*RXD	Shorting pins 6 and 7 inserts 220 Ω termination resistance between RXD and *RXD.	
7	RT		
8	5VPP		#
9	GND	Signal ground 0 V	


P: Personal computer
S: Servopack
#: Terminal not used, leave open.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4) Cable for connecting Servopack and IBM PC (IBM compatible PC)


Use Yaskawa DE9408565 type cable.

• Dimensional Drawings: Type DE9408565

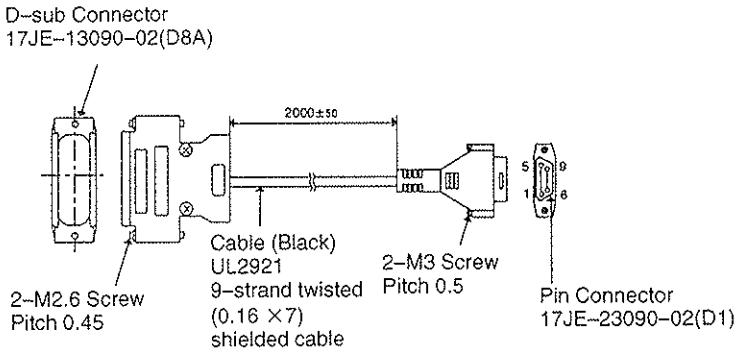

Note: Fold back the cable shielding at each end of the cable and secure it with clamp.


• Connection

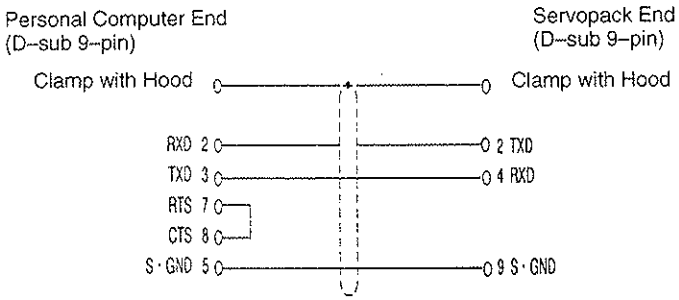

5) Cable for connecting Servopack and NEC PC-98 half-pitch connector

Use Yaskawa DE9408564 type cable.

• Dimensional Drawings: Type DE9408564

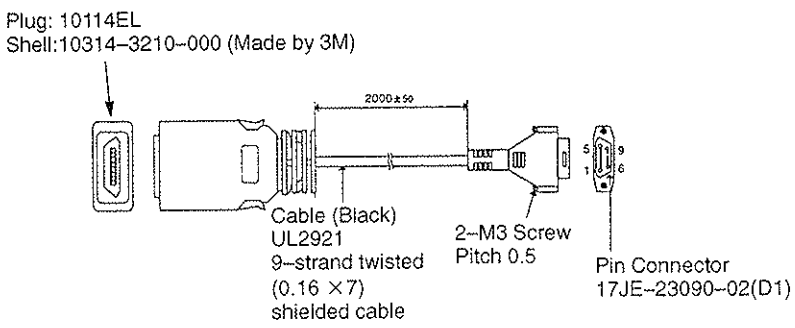


Note: Fold back the cable shielding at each end of the cable and secure it with clamp.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

4.6.14 Cables for Connecting PC and Servopack

• Connection

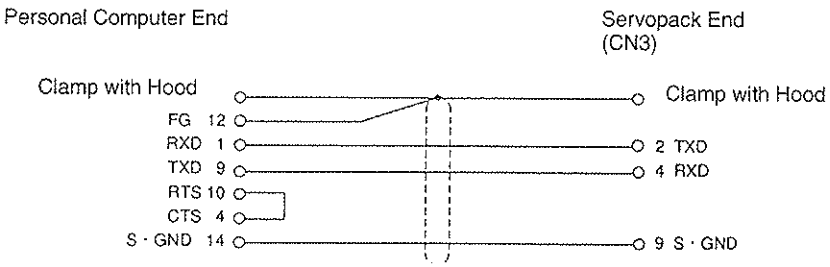

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

INSPECTION, MAINTENANCE, AND TROUBLESHOOTING

5

This chapter describes the basic inspections and maintenance to be carried out by the customer.
In addition, troubleshooting procedures are described for problems which cause an alarm display and for problems which result in no alarm display.

5.1 Inspection and Maintenance 218
5.1.1 Servomotor 218
5.1.2 Servopack 219

5.2 Troubleshooting 220
5.2.1 Troubleshooting Problems with Alarm Display 220
5.2.2 Troubleshooting Problems With No Alarm Display 233
5.2.3 Internal Connection Diagram and Instrument Connection Examples 234

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

5.1 Inspection and Maintenance


This section describes the basic inspections and maintenance for Σ-L Series servo drives.

5.1.1 Servomotor 218
5.1.2 Servopack 219

5.1.1 Servomotor

For inspection and maintenance of servomotors, follow the simple, daily inspection procedures in the table below.

The AC servomotors are brushless. Simple, daily inspection is sufficient. The inspection and maintenance frequencies in the table are only guidelines. Determine the frequency to suit the operating conditions and environment.



Item	Frequency	Procedure	Comments
Vibration and noise	Daily	Touch and listen.	Levels higher than normal?
Appearance	According to degree of contamination	Clean with cloth or compressed air.	
Insulation resistance measurement	Yearly	Disconnect Servopack and test insulation resistance at 500 V. Must exceed 10 MΩ. (See note below)	Contact your Yaskawa representative if the insulation resistance is below 10 MΩ.
Replace oil seal	Every 5,000 hours	Remove servomotor from machine and replace oil seal.	Applies only to motors with oil seal.
Overhaul	Every 20,000 hours or 5 years	Contact your Yaskawa representative.	The customer should not disassemble and clean the servomotor.

Note Measure across the servomotor FG (green/yellow) and the U-phase (red), V-phase (white), or W-phase (blue) power lead.


During inspection and maintenance, do not disassemble the servomotor.
If disassembly of the servomotor is required, contact your Yaskawa representative.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

5.1.2 Servopack

For inspection and maintenance of the Servopack, follow the inspection procedures in the table below at least once every year.

The Servopack contains highly reliable parts and daily inspection is not required. Carry out the inspections and maintenance in the table below once every year.



Item	Frequency	Procedure	Remedy
Clean unit interior and circuit boards	Yearly	Check for dust, dirt, and oil on the surfaces.	Clean with compressed air.
Loose screws	Yearly	Check for loose terminal block and connector screws.	Tighten any loose screws.
Defective parts in unit or on circuit boards.	Yearly	Check for discoloration, damage or discontinuities due to heating.	Contact your Yaskawa representative.

5

Part Replacement Schedule

The following parts are subject to mechanical wear or deterioration over time. To avoid failure, replace these parts at the frequency indicated.

Part	Standard Replacement Period	Replacement Method
Smoothing Capacitor	7 to 8 years	Test. Replace with new part if necessary.
Relays	---	Test. Replace if necessary.
Fuse	10 years	Replace with new part.

Note Operating Conditions:

- Ambient Temperature: annual average 30°C
- Load Factor: 80% max.
- Operation Rate: 20 hours/day max.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

5.2 Troubleshooting

This section describes causes and remedies for problems which cause an alarm display and for problems which result in no alarm display.

5.2.1 Troubleshooting Problems with Alarm Display 220
5.2.2 Troubleshooting Problems With No Alarm Display 233
5.2.3 Internal Connection Diagram and Instrument Connection Examples 234

5.2.1 Troubleshooting Problems with Alarm Display

Refer to the tables below to identify the cause of a problem which causes an alarm display and take the corrective actions described.
Note that A.99 does not indicate an alarm.

Contact your Yaskawa representative if the problem cannot be solved by the described procedures.

• Display and Outputs

Digital Operator Display and Alarm Name	Alarm Output			
	Alarm Code Output			Alarm Output
	ALO1	ALO2	ALO3	
A.99	OFF	OFF	OFF	ON

OFF: Output transistor is OFF
ON: Output transistor is ON

Status When Alarm Occurred

Indicates normal operation. Not an alarm.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

• Display and Outputs

Digital Operator Display and Alarm Name	Alarm Output			
	Alarm Code Output			Alarm Output
	ALO1	ALO2	ALO3	
A.02 User constants breakdown	OFF	OFF	OFF	OFF

OFF: Output transistor is OFF
ON: Output transistor is ON

Status When Alarm Occurred

At power ON — **A, B**

	Cause	Remedy
A	Power turned OFF during parameter write. Alarm occurred next power ON.	Replace Servopack.
B	Circuit board (1PWB) defective	Replace Servopack.

5

• Display and Outputs

Digital Operator Display and Alarm Name	Alarm Output			
	Alarm Code Output			Alarm Output
	ALO1	ALO2	ALO3	
A.04 User constant setting error	OFF	OFF	OFF	OFF

OFF: Output transistor is OFF
ON: Output transistor is ON

Status When Alarm Occurred

At power ON — **A, B**

	Cause	Remedy
A	An out-of-range user constant was previously set or loaded.	Reset all user constants in range. Otherwise, re-load correct user constants.
B	Circuit board (1PWB) defective	Replace Servopack.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

5.2.1 Troubleshooting Problems with Alarm Display cont.

• Display and Outputs

Digital Operator Display and Alarm Name	Alarm Output			
	Alarm Code Output			Alarm Output
	ALO1	ALO2	ALO3	
A.10 Overcurrent	ON	OFF	OFF	OFF

OFF: Output transistor is OFF
ON: Output transistor is ON

Status When Alarm Occurred

During servomotor operation — **A**, **B**, **C**, D, E

When servo ON (S-ON) signal turned ON — D, **E**

At power ON — **D**

	Cause	Remedy
A	Wiring grounded between Servopack and servomotor.	Check and correct wiring.
B	Servopack ambient temperature exceeds 50°C	Bring Servopack ambient temperature to 50°C **Note** Alarm cannot be reset while power transistor module temperature exceeds 90°C.
C	Servomotor U, V, or W phase grounded.	Replace servomotor.
D	• Circuit board (1PWB) defective • Power transistor defective	Replace Servopack.
E	Current feedback circuit, power transistor, DB relay, or circuit board defective.	Replace Servopack.


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

• Display and Outputs

Digital Operator Display and Alarm Name	Alarm Output			
	Alarm Code Output			Alarm Output
	ALO1	ALO2	ALO3	
A.40 Overvoltage	OFF	OFF	ON	OFF

OFF: Output transistor is OFF
ON: Output transistor is ON

Status When Alarm Occurred

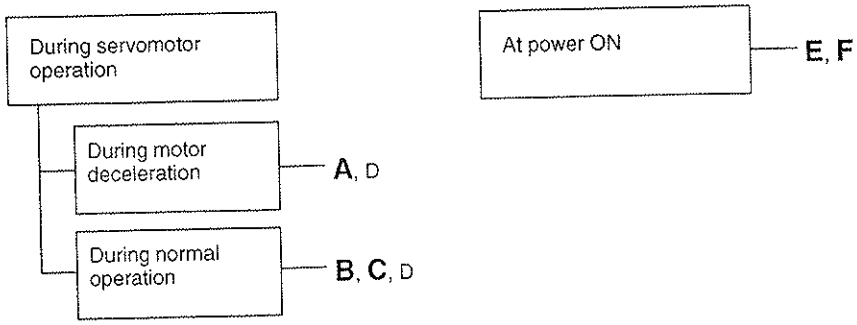

	Cause	Remedy
A	Load inertia high and motor speed too high	• Change operating conditions. • Use regenerative unit. • If multiple units are used, connect all P, N terminals in parallel.
B	Load exceeds capacity of regenerative unit	Change operating conditions.
C	Servomotor speed too high	Reduce motor speed.
D	Servopack defective	Replace Servopack.
E	Input voltage too high	Change input voltage to normal value.
F	Circuit board (1PWB) defective.	Replace Servopack.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


5.2.1 Troubleshooting Problems with Alarm Display cont.

• Display and Outputs

Digital Operator Display and Alarm Name	Alarm Output			
	Alarm Code Output			Alarm Output
	ALO1	ALO2	ALO3	
A.51 Overspeed	ON	OFF	ON	OFF

OFF: Output transistor is OFF
ON: Output transistor is ON

Status When Alarm Occurred

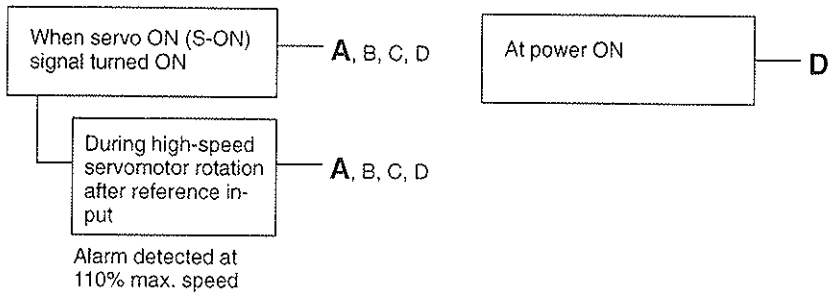

	Cause	Remedy
A	• Servomotor wiring incorrect. • Encoder wiring incorrect (disconnection, shortcircuit, power supply, etc.)	Check and correct wiring. (Check A-, B-, C-phase pulses correct at CN2.)
B	Incremental encoder power not supplied from Servopack.	Use the Servopack power supply for the encoder.
C	Noise in encoder wiring.	Separate encoder wiring from main wiring circuits.
D	Circuit board (1PWB) defective	Replace Servopack.


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

• Display and Outputs

Digital Operator Display and Alarm Name	Alarm Output			
	Alarm Code Output			Alarm Output
	ALO1	ALO2	ALO3	
A.70 Overload	ON	ON	ON	OFF

OFF: Output transistor is OFF
ON: Output transistor is ON

Status When Alarm Occurred

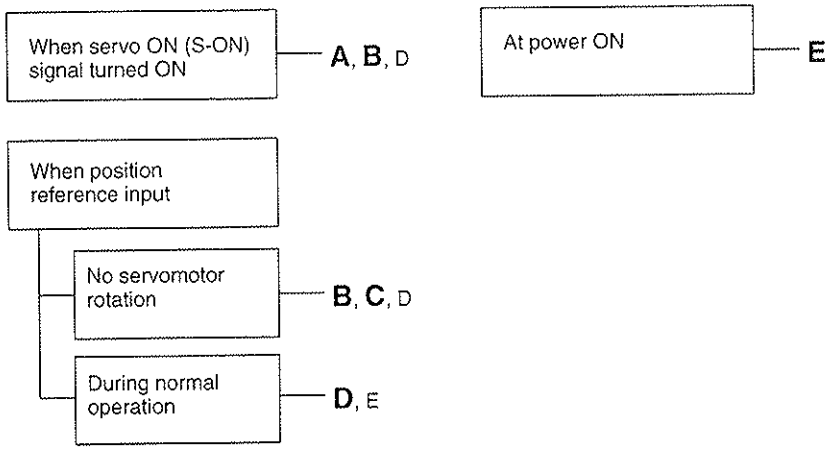

	Cause	Remedy
A	Servomotor wiring incorrect or disconnected	Check wiring and connectors at servomotor.
B	Encoder wiring incorrect or disconnected	Check wiring and connectors at encoder.
C	Load greatly exceeds rated torque	Reduce load torque and inertia. Otherwise, replace with larger capacity servomotor.
D	Incremental encoder power not supplied from Servopack.	Use the Servopack power supply for the encoder.
E	Circuit board (1PWB) defective	Replace Servopack.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

5.2.1 Troubleshooting Problems with Alarm Display cont.

- **Display and Outputs**

Digital Operator Display and Alarm Name	Alarm Output			
	Alarm Code Output			Alarm Output
	ALO1	ALO2	ALO3	
A.b1 Reference input read error (for speed/torque control only)	OFF	OFF	OFF	OFF

OFF: Output transistor is OFF
ON: Output transistor is ON

Status When Alarm Occurred

During servomotor operation — A, B

At power ON — C

	Cause	Remedy
A	Part malfunctioned in reference read-in unit (A/D converter, etc.).	Reset alarm and restart operation.
B	Part defective in reference read-in unit (A/D converter, etc.).	Replace Servopack.
C	Circuit board (1PWB) defective	Replace Servopack.


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

• Display and Outputs

Digital Operator Display and Alarm Name	Alarm Output			
	Alarm Code Output			Alarm Output
	ALO1	ALO2	ALO3	
A.C1 Servo overrun	ON	OFF	ON	OFF

OFF: Output transistor is OFF
ON: Output transistor is ON

Status When Alarm Occurred

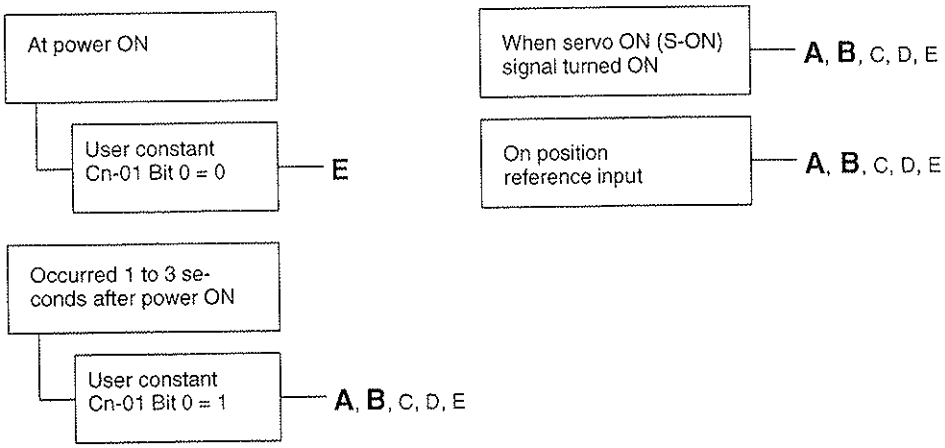

	Cause	Remedy
A	Servomotor wiring incorrect or disconnected	Check wiring and connectors at servomotor.
B	Encoder wiring incorrect or disconnected	Check wiring and connectors at encoder.
C	Incremental encoder power not supplied from Servopack.	Use the Servopack power supply for the encoder.
D	Encoder defective	Replace servomotor.
E	Circuit board (1PWB) defective	Replace Servopack.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

5.2.1 Troubleshooting Problems with Alarm Display cont.

• Display and Outputs

Digital Operator Display and Alarm Name	Alarm Output			
	Alarm Code Output			Alarm Output
	ALO1	ALO2	ALO3	
A.C2 Encoder phase detection error	ON	OFF	ON	OFF

OFF: Output transistor is OFF
ON: Output transistor is ON

Status When Alarm Occurred

At power ON — **D**

During servomotor operation — **A, B, C,** D

Occurred 1 to 3 seconds after power ON — **A, B, C,** D

	Cause	Remedy
A	Noise in encoder wiring.	Separate encoder wiring from main wiring circuits.
B	Encoder wiring incorrect or poor connection	Check wiring and connectors at encoder.
C	Encoder defective	Replace servomotor.
D	Circuit board (1PWB) defective	Replace Servopack.


• Display and Outputs

Digital Operator Display and Alarm Name	Alarm Output			
	Alarm Code Output			Alarm Output
	ALO1	ALO2	ALO3	
A.C3 Encoder A-, B-phase discontinuity	ON	OFF	ON	OFF

OFF: Output transistor is OFF
ON: Output transistor is ON

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Status When Alarm Occurred

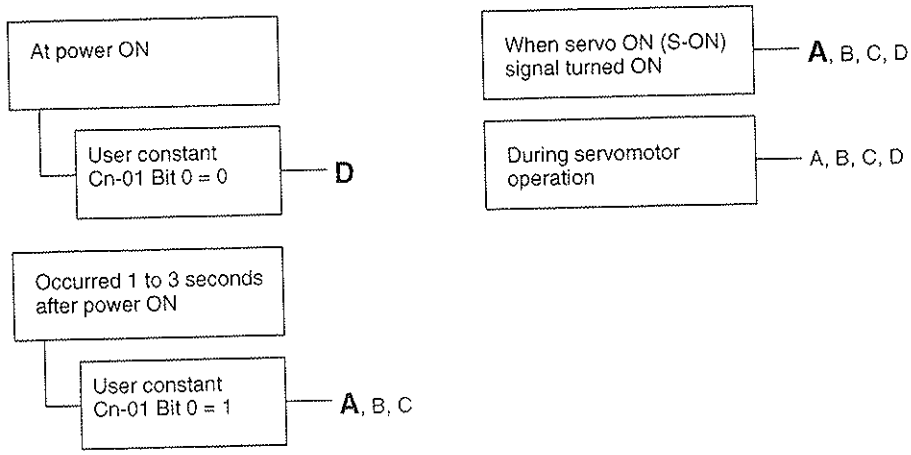

	Cause	Remedy
A	Encoder wiring incorrect or poor connection	Check wiring and connectors at encoder.
B	Noise in encoder wiring.	Separate encoder wiring from main wiring circuits.
C	Encoder defective	Replace servomotor.
D	Circuit board (1PWB) defective	Replace Servopack.


5

• Display and Outputs

Digital Operator Display and Alarm Name	Alarm Output			
	Alarm Code Output			Alarm Output
	ALO1	ALO2	ALO3	
A.C4 Encoder C-phase discontinuity	ON	OFF	ON	OFF

OFF: Output transistor is OFF
ON: Output transistor is ON

Status When Alarm Occurred

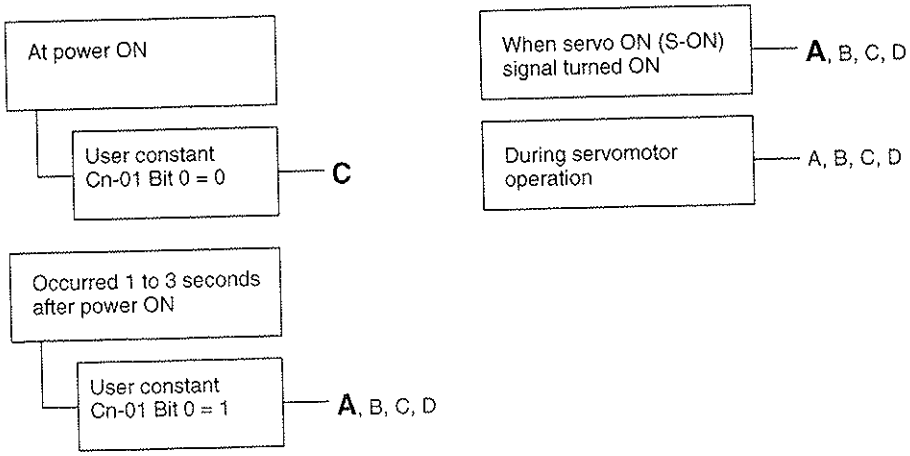

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

5.2.1 Troubleshooting Problems with Alarm Display cont.

	Cause	Remedy
A	Encoder wiring incorrect or poor connection	Check wiring and connectors at encoder.
B	Noise in encoder wiring.	Separate encoder wiring from main wiring circuits.
C	Encoder defective	Replace servomotor.
D	Circuit board (1PWB) defective	Replace Servopack.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

• Display and Outputs

Digital Operator Display and Alarm Name	Alarm Output			
	Alarm Code Output			Alarm Output
	ALO1	ALO2	ALO3	
A.F3 Power loss error	OFF	ON	OFF	OFF

OFF: Output transistor is OFF
ON: Output transistor is ON

Status When Alarm Occurred

At power ON — A

During servomotor operation — B

	Cause	Remedy
A	Time between turning power OFF and back ON was shorter than the power holding time.	After turning power OFF, wait more than the power holding time (6 to 15 s, according to type) before turning the power back ON.
B	If any of the following power supply conditions are met during motor operation: • Complete power failure : half cycle of supply frequency • Voltage drop: full cycle of supply frequency **Note** Because of detector lag and detector margin, power loss of 30 to 55 ms does not cause an alarm.	Check the power supply. **Terms** • Complete power failure=Power failure where voltage drops to zero. • Voltage drop=Power failure where voltage drops, but not to zero.

5

• Display and Outputs

Digital Operator Display and Alarm Name	Alarm Output			
	Alarm Code Output			Alarm Output
	ALO1	ALO2	ALO3	
CPF00 Digital operator transmission error 1	Not specified			

Note This alarm is not stored in alarm trace-back function memory.

Status When Alarm Occurred

At power ON. Digital operator connected before Servopack power turned ON. — A, B, C, D

Digital operator connected to Servopack while power turned ON. — A, B, C, D

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

5.2.1 Troubleshooting Problems with Alarm Display cont.

	Cause	Remedy
A	Cable defective or poor contact between digital operator and Servopack.	• Check connector connections. • Replace cable.
B	Malfunction due to external noise	Separate digital operator and cable from noise source.
C	Digital operator defective	Replace digital operator.
D	Servopack defective	Replace Servopack.

• Display and Outputs

Digital Operator Display and Alarm Name	Alarm Output			
	Alarm Code Output			Alarm Output
	ALO1	ALO2	ALO3	
CPF01 Digital operator transmission error 2	Not specified			

Note This alarm is not stored in alarm trace-back function memory.

Status When Alarm Occurred

During operation — **A, B, C, D**

	Cause	Remedy
A	Cable defective or poor contact between digital operator and Servopack.	• Check connector connections. • Replace cable.
B	Malfunction due to external noise	Separate digital operator and cable from noise source.
C	Digital operator defective	Replace digital operator.
D	Servopack defective	Replace Servopack

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

5.2.2 Troubleshooting Problems With No Alarm Display

Refer to the tables below to identify the cause of a problem which causes no alarm display and take the remedy described.

Turn OFF the servo system power supply before commencing the shaded procedures.

Contact your Yaskawa representative if the problem cannot be solved by the described procedures.

Troubleshooting Table No Alarm Display

Symptom	Cause	Inspection	Corrective Action
Servomotor does not start	Power not connected	Check voltage across R and T.	Correct the power circuit.
	Loose connection	Check terminals of connectors (CN1, CN2).	Tighten any loose parts.
	Connector (CN1) external wiring incorrect	Check connector (CN1) external wiring	Refer to connection diagram and correct wiring.
	Servomotor or encoder wiring disconnected.		Reconnect wiring
	Overloaded	Run under no load.	Reduce load or replace with larger capacity servomotor.
	Speed references not input	Check input pins # 1 to 4 of connector CN1.	Correctly input speed references.
	S-ON is turned OFF	Cn-01 Bit 0 is 0.	Turn S-ON input ON.
	Bit setting of P-CON is incorrect.	Check the bits A and B of user constant Cn-01.	Correct the bit setting.
	Encoder type differs.	1024 P/R incremental encoder?	Use the motor with 1024 P/R incremental encoder.
	P-OT and N-OT inputs are turned OFF.	(If Cn-01 Bits 2, 3 are 0)	Turn P-OT and N-OT input signals ON.
Servomotor moves instantaneously, then stops	Servomotor or encoder wiring incorrect.		Refer to Subsection 2.6.6 and correct wiring.
Suddenly stops during operation and will not restart	Alarm reset signal (ALM-RST) is turned ON because an alarm occurred.		Remove cause of alarm. Turn alarm reset signal (ALM-RST) from ON to OFF.
Servomotor speed unstable	Wiring connection to motor defective	Check connection of power lead (U, V, and W phase) and encoder connectors.	Tighten any loose terminals or connectors.
Servomotor vibrates at approximately 200 to 400 Hz.	Speed loop gain value too high.		Reduce speed loop gain (Cn-04) preset value.
	Reference input lead is bundled with power cables.		Separate reference input lead at least 30 cm from power cables.
High rotation speed overshoot on starting and stopping.	Speed loop gain value too high.		Reduce speed loop gain (Cn-04) preset value.
Servomotor overheated	Ambient temperature too high	Measure servomotor ambient temperature.	Reduce ambient temperature to 40°C max.
	Servomotor surface dirty	Visual check	Clean dust and oil from motor surface.
	Overloaded	Run under no load.	Reduce load or replace with larger capacity servomotor.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Symptom	Cause	Inspection	Corrective Action
Abnormal noise	Mechanical mounting incorrect	Servomotor mounting screws loose?	Tighten mounting screws.
		Coupling not centered?	Center coupling.
		Coupling unbalanced?	Balance coupling.
	Bearing defective	Check noise and vibration near bearing.	Consult your Yaskawa representative if defective.
	Machine causing vibrations	Foreign object intrusion, damage or deformation of sliding parts of machine.	Consult with machine manufacturer.


5.2.3 Internal Connection Diagram and Instrument Connection Examples

The SGDL Servopack internal connection diagram and instrument connection examples are given below.
Refer to these diagrams during inspection and maintenance.

1) Internal Connection Diagram


Single-phase 200 to 230 VAC $^{+10}_{-15}$ %, 50/60 Hz

or single-phase 100 to 115 VAC $^{+10}_{-15}$ %, 50/60 Hz

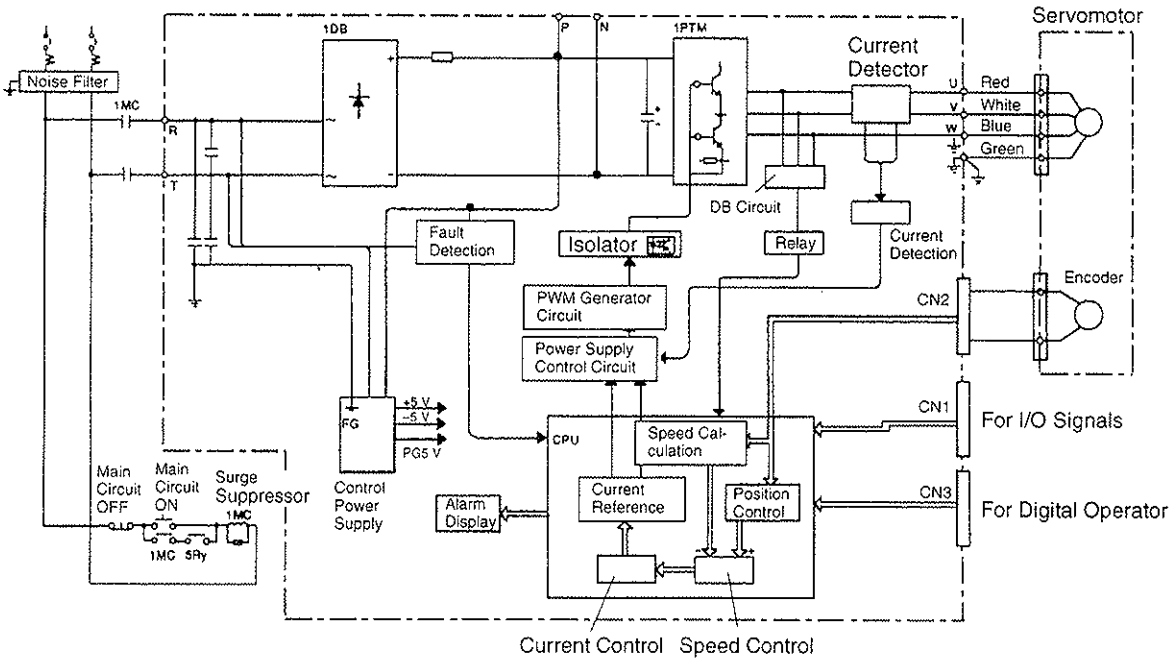

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2) Instrument Connection Examples

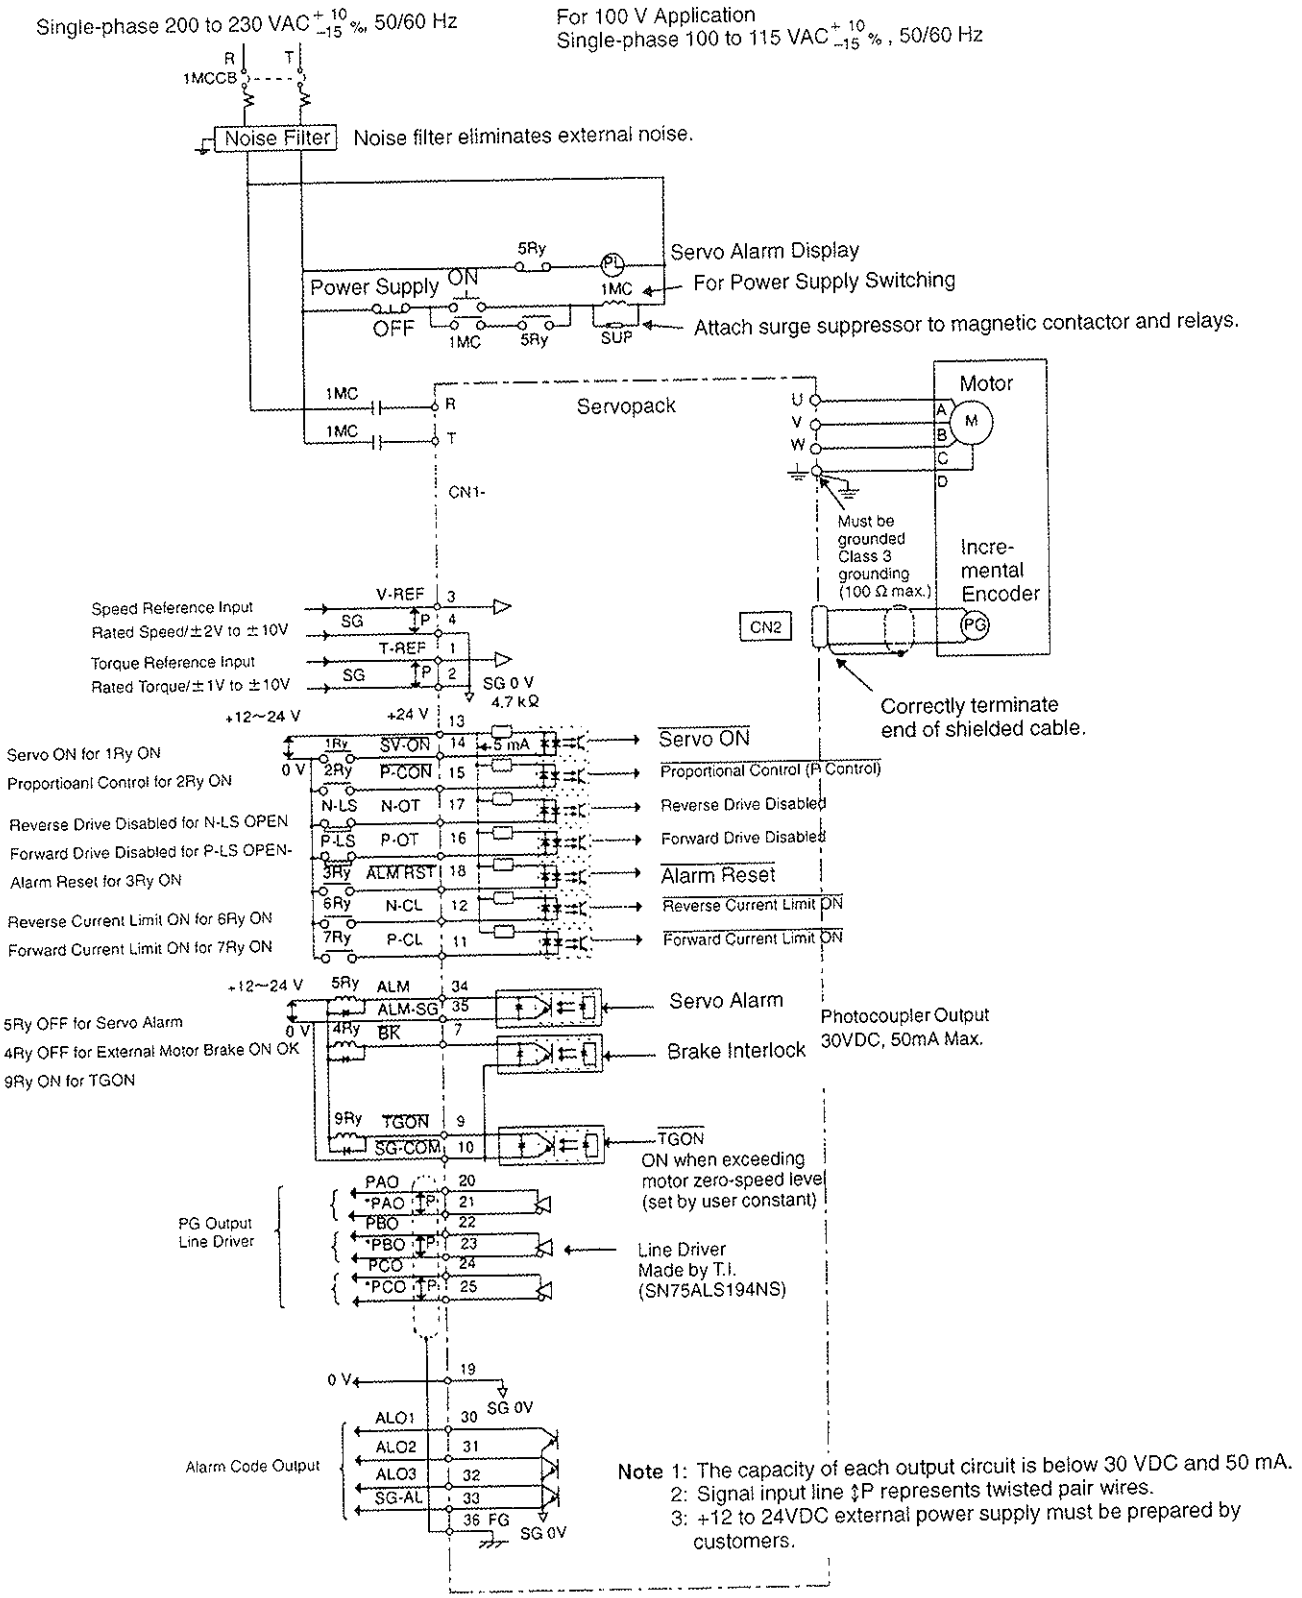

Note 1: The capacity of each output circuit is below 30 VDC and 50 mA.
2: Signal input line ↕P represents twisted pair wires.
3: +12 to 24VDC external power supply must be prepared by customers.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Appendix A

Servo Adjustment

This appendix presents the basic rules for Σ-L Series AC Servopack gain adjustment, describes various adjustment techniques, and gives some preset values as guidelines.

A.1 Σ-L Series AC Servopack Gain Adjustment .. 238
A.1.1 Σ-L Series AC Servopacks and Gain Adjustment Methods .. 238
A.1.2 Basic Rules for Gain Adjustment 239

A.2 Adjusting a Speed-control Servopack 240
A.2.1 Adjusting Using Auto-tuning 240
A.2.2 Manual Adjustment 241

A.3 Gain Setting References 244
A.3.1 Guidelines for Gain Settings According to Load Inertia Ratio 244

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

A.1 Σ-L Series AC Servopack Gain Adjustment

This section gives some basic information required to adjust the servo system.

A.1.1 Σ-L Series AC Servopacks and Gain Adjustment Methods 238
A.1.2 Basic Rules for Gain Adjustment 239

A.1.1 Σ-L Series AC Servopacks and Gain Adjustment Methods


1) The Servopacks allow both manual adjustment by the conventional method of observing the machine response and automatic adjustment using the internal auto-tuning function.

2) The main user constants changed by the customer to adjust the servo system include the following:

- Cn-04 (Speed Loop Gain)
- Cn-05 (Speed Loop Integration Time Constant)
- Cn-17 (Torque Reference Filter Time Constant)
- Cn-1A (Position Loop Gain)

A simple block diagram of the servo system is shown below.

Servo System Block Diagram

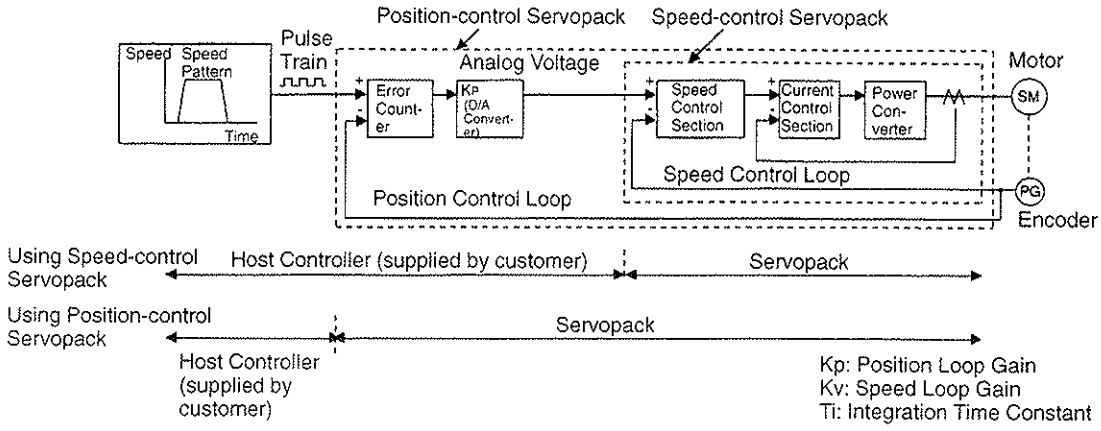

Note: A position-control Servopack has no D/A converter for speed reference output. This conversion is handled by internal calculations.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

A.1.2 Basic Rules for Gain Adjustment


1) The servo system comprises three feedback systems: position loop, speed loop, and current loop. The response must increase from outer loop to inner loop (see Servo System Block Diagram, above). The response deteriorates and oscillates if this principle is not obeyed.
The customer cannot adjust the current loop. Sufficient response is assured for the current loop.
The customer can adjust the position loop gain and speed loop gain, as well as the speed loop integration time constant and torque reference filter.

2) The position loop and speed loop must be adjusted to provide a balanced response. In particular, if the position loop gain only is increased, the speed references oscillate and the result is increased, oscillating position control times.
If the position loop gain is increased, the speed loop gain (Cn-04) must be similarly increased.
If the mechanical system starts to oscillate after the position loop gain and speed loop gain are increased, do not increase the gains further.

3) The position loop gain should not normally be increased above the characteristic frequency of the mechanical system.
For example, the harmonic gears used in an articulated robot form a structure with extremely poor rigidity and a characteristic frequency of approximately 10 to 20 Hz. This type of machine allows a position loop gain of only 10 to 20 (1/sec).
Conversely, the characteristic frequency of a precision machine tool such as a chip mounter or IC bonder exceeds 70 Hz, allowing a position loop gain exceeding 70 (1/sec) for some machines.
Therefore, although the response of the servo system (controller, servo driver, motor, detectors, etc.) is an important factor where good response is required, it is also important to improve the rigidity of the mechanical system.

4) In cases where the position loop response is greater than or equal to the speed loop response and linear acceleration or deceleration is attempted, the poor speed loop response and follow-up cause an accumulation of position loop errors and result in increased output of speed references from the position loop.
The motor moves faster and overshoots as a result of increased speed references, and the position loop tends to decrease the speed references. However, the poor motor follow-up due to the poor speed loop response results in oscillating speed references, as shown in the diagram below.
If this problem occurs, reduce the position loop gain or increase the speed loop gain to eliminate the speed reference oscillations.

Speed Reference Output with Unbalanced Position Loop Gain and Speed Loop Gain

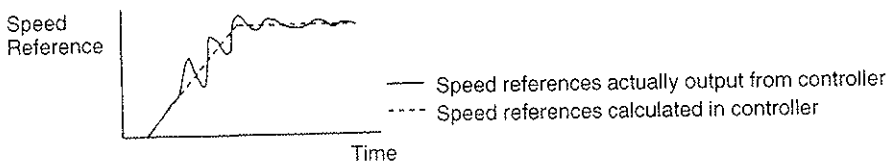

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

A.2 Adjusting a Speed-control Servopack

This section gives examples of adjusting the gains of a speed-control Servopack manually and using auto-tuning.

A.2.1 Adjusting Using Auto-tuning 240
A.2.2 Manual Adjustment 241

A.2.1 Adjusting Using Auto-tuning

1) Important Points About Auto-tuning

a) Speed During Auto-tuning
SGDL Servopack runs at 500 r/min.

b) Selecting Machine Rigidity
If the machine rigidity is unknown, select the rigidity according to the following standards.

Drive Method	Machine Rigidity	
	Level	Rigidity
Ball screw, direct	3 (C-003) to 7 (C-007)	High/medium response
Ball screw, with reduction gears	2 (C-002) to 3 (C-003)	Medium response
Timing belt	1 (C-001) to 3 (C-003)	Low/medium response
Chain	1 (C-001) to 2 (C-002)	Low response
Wave reduction gears*	1 (C-001) to 2 (C-002)	Low response

* Product name : Harmonic Drive

Select the machine rigidity level for SGDA and DR2 according to the table.

Level	Rigidity
7 (C-007)	High
6 (C-006)	:
5 (C-005)	:
4 (C-004)	:
3 (C-003)	Medium
2 (C-002)	:
1 (C-001)	Low

Auto-tuning may not end if high response is selected for a low-rigidity machine or low response is selected for a high-rigidity machine.
If this occurs, halt the auto-tuning and change the machine rigidity selection.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

2) If Auto-tuning is Unsuccessful

Auto-tuning may be unsuccessful (the end of auto-tuning not displayed) for machines with large play or extremely low rigidity.
Similarly, auto-tuning may be unsuccessful for a machine with high load inertia (exceeding 15 to 30 times the motor moment of inertia).
In these cases, use conventional manual adjustment.
Even if auto-tuning is successful for a machine with large fluctuations in load inertia or load torque, vibrations or noise may still occur in some positions.

3) Response During Operation is Unsatisfactory after Auto-tuning

Auto-tuning sets the gain and integration time constant with some safety margin (to avoid oscillations). This can result in positioning times.
In particular, the target position may not be reached if low response is selected, because the machine does not move in response to the final minute references. An excessively high setting of the integration time constant (Cn-05) during auto-tuning is one cause of this problem.
If response is slow after auto-tuning, the speed loop gain cannot be manually increased very much before oscillation starts.
In this case, manually reduce the integration time constant while observing the machine behavior to ensure oscillation does not occur.
Auto-tuning does not set the torque reference filter (Cn-17) or speed reference gain (Cn-03).

A.2.2 Manual Adjustment

1) The role of each user constant is briefly described below.

a) Speed Loop Gain (Cn-04)
This user constant sets the speed loop response.
The response is improved by setting this user constant to the maximum value in the range which does not cause vibrations in the mechanical system.
The following formula relates the speed loop gain to the load inertia.

$$\text{Speed Loop Gain Kv [Hz]} = \frac{2}{\frac{GD_L^2}{GD_M^2} + 1} \times \text{(Cn-04 Preset value)}$$

GD_L^2: Motor Axis Converted Load Inertia
GD_M^2: Motor Moment of Inertia

b) Speed Loop Integration Time Constant (Cn-05)
The speed loop has an integration element to allow response to micro-inputs.
This integration element can produce a delay in the servo system, and the positioning setting time increases and response becomes slower as the time constant increases.
However, the integration time constant must be increased to prevent machine vibration if the load inertia is large or the mechanical system includes a element that is

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

prone to vibration.
The following formula calculates a guideline value.

$$Ti \geq 2.3 \times \frac{1}{2\pi \times Kv}$$

Ti: Integration Time Constant (sec)
Kv: Speed Loop Gain (Hz) (calculated above)

c) Torque Reference Filter Time Constant (Cn-17)
When a ball screw is used, torsional resonance may occur which increases the pitch of the vibration noise.
This vibration can sometimes be overcome by increasing the torque reference filter time constant.
However, this filter will produce a delay in the servo system, just like the integration time constant, and its value should not be increased more than necessary.

d) Speed Reference Gain (Cn-03)
Changing the speed reference gain (Cn-03) changes the position loop gain an equivalent amount. That is, reducing the speed reference gain is equivalent to reducing the position loop gain and increasing it is equivalent to increasing the position loop gain.
Use this user constant (Cn-03) in the following circumstances:

- No position loop gain adjustment at host controller (including cases where fine adjustment not possible by changing number of D/A converter bits)

- Clamping the speed reference output range to specific speeds

Normally leave at the factory setting.

NOTE For SGDL Servopack used for speed control, the position loop gain (Cn-1A) is valid in zero-clamp mode only.
For normal control, change the position loop gain at the host controller or adjust the speed reference gain (Cn-03) in the Servopack.
Changing Cn-1A does not change the position loop gain.

2) Adjustment Procedure

a) Set the position loop gain at the host controller to a low value and increase the speed loop gain (Cn-04) within the range that no abnormal noise or vibration occurs.
If adjustment of the position loop gain is not possible at the host controller, reduce the speed reference gain (Cn-03).

b) Slightly reduce the speed loop gain from the value at step 1, and increase the position loop gain at the host controller in the range that no overshooting or vibration occurs.
If adjustment of the position loop gain is not possible at the host controller, increase the speed reference gain (Cn-03).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

c) Determine the speed loop integration time constant (Cn-05), by observing the positioning setting time and vibrations in the mechanical system.
The positioning setting time may become excessive if the speed loop integration time constant (Cn-05) is too large.

d) It is not necessary to change the torque reference filter time constant (Cn-17) unless torsional resonance occurs in the machine shafts.
Torsional resonance may be indicated by a high vibration noise. Adjust the torque reference filter time constant (Cn-17) to reduce the vibration noise.

e) Finally, fine adjustment of the position gain, speed gain, and integration time constant is required to determine the optimum point for step response.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

A.3 Gain Setting References

This section presents tables of load inertia values for reference when adjusting the gain.

A.3.1 Guidelines for Gain Settings According to Load Inertia Ratio 244

A.3.1 Guidelines for Gain Settings According to Load Inertia Ratio

1) Adjustment guidelines are given below according to the rigidity of the mechanical system and load inertia. Use these values as guidelines when adjusting according to the procedures described above.
These values are given as guidelines only. Oscillations and poor response may occur inside the specified value ranges. Observe the response (waveform) when optimizing the adjustment.
Higher gains are possible for machines with high rigidity.

a) Machines with High Rigidity

Ball Screw, Direct Drive Machines
Example: Chip mounter, IC bonder, precision machine tools

Load/Inertia Ratio (GD_L^2/GD_M^2)	Position Loop Gain (Cn-1A) [1/s]	Speed Loop Gain (Cn-04) [Hz]	Speed Loop Integration Time Constant (Cn-05) [ms]
1 x	50 to 70	50 to 70	5 to 20
3 x		100 to 140	Slightly increase for inertia ratio of 20 x, or greater.
5 x		150 to 200	
10 x		270 to 380	
15 x		400 to 560	
20 x		500 to 730	
30 x		700 to 1100	

For an inertia ratio of 10 x, or greater, slightly reduce the position loop gain and speed loop gain below the values shown and set the integration time constant to a higher value before starting the adjustment.
As the inertia ratio increases, set the position loop gain and speed loop gain to the lower limit of the range of values specified. Conversely, increase the speed loop integration time constant.

b) Machines with Medium Rigidity

Machines driven by ball screw through reduction gears, or machines directly driven by long ball screws.
Example: General machine tools, orthogonal robots, conveyors

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Load/Inertia Ratio (GD_L^2/GD_M^2)	Position Loop Gain (Cn-1A) [1/s]	Speed Loop Gain (Cn-04) [Hz]	Speed Loop Integration Time Constant (Cn-05) [ms]
1 x	30 to 50	30 to 50	10 to 40 Slightly increase for inertia ratio of 20 x, or greater.
3 x		60 to 100	
5 x		90 to 150	
10 x		160 to 270	
15 x		240 to 400	
20 x		310 to 520	
30 x		450 to 770	

For an inertia ratio of 10 x, or greater, slightly reduce the position loop gain and speed loop gain below the values shown and set the integration time constant to a higher value before starting the adjustment.
As the inertia ratio increases, set the position loop gain and speed loop gain to the lower limit of the range of values specified. Conversely, increase the speed loop integration time constant.

c) Machines with Low Rigidity

Machines driven by timing belts, chains or wave reduction gears (product name : Harmonic Drive).
Example: Conveyors, articulated robots

Load/Inertia Ratio (GD_L^2/GD_M^2)	Position Loop Gain (Cn-1A) [1/s]	Speed Loop Gain (Cn-04) [Hz]	Speed Loop Integration Time Constant (Cn-05) [ms]
1 x	10 to 20	10 to 20	50 to 120 Slightly increase for inertia ratio of 20 x, or greater.
3 x		20 to 40	
5 x		30 to 60	
10 x		50 to 110	
15 x		80 to 160	
20 x		100 to 210	
30 x		150 to 310	

For an inertia ratio of 10 x, or greater, slightly reduce the position loop gain and speed loop gain below the values shown and set the integration time constant to a higher value before starting the adjustment.
As the inertia ratio increases, set the position loop gain and speed loop gain to the lower limit of the range of values specified. Conversely, increase the speed loop integration time constant.


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Appendix B

List of I/O Signals

This appendix lists I/O signal terminals (connector CN1) on Servopacks which connect to a host controller or external circuit.

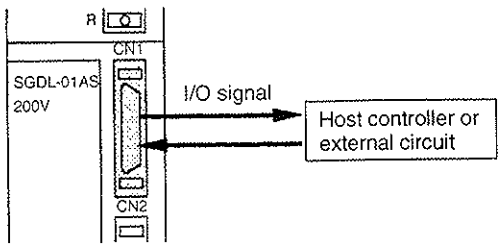

Note 1) Refer to *Chapter 2* for details of how to use I/O signals.

2) Note that the functions of I/O signal terminals differ according to the memory switch (Cn-01, Cn-02) settings.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

List of I/O Signals (1)

Specifications	Standard Specifications	Torque Limit Output	Zero-clamp	Contact Input Speed Control		Speed Control with Torque Restriction by Analog Voltage Reference
Memory Switch Setting	Standard Setting	Cn-01 Bit 4 = 1	Cn-01 Bit A = 1 Bit B = 0	Cn-02 Bit 2 = 1		Cn-02 Bit F = 1
				Cn-01 Bit B = 0	Cn-01 Bit B = 1	
CN1 terminal No. 1	--- (Unused)					T-REF Torque limit input 2.2.6
2	--- (Unused)					SG-T Signal ground for torque limit input
3	V-REF Speed reference input 2.2.1			--- (Unused)	V-REF Speed reference 2.2.4	V-REF Speed reference
4	SG-V Signal ground for speed reference input			--- (Unused)	SG-V Signal ground for speed reference 2.2.4	SG-V Signal ground for speed reference 2.2.6
5	--- (Unused)					
6	--- (Unused)					
7	$\overline{BK}$ Brake interlock output 2.4.4					
8	--- (Unused)					
9	$\overline{TGON}$ Running output 2.5.3	$\overline{TGON}$ Torque limit detection 2.1.3				
10	SG-COM Signal ground common 2.2.3					
11	$\overline{P\text{-}CL}$ Forward rotation torque limit 2.1.3			$\overline{P\text{-}CL}$ Contact input speed control 1	$\overline{P\text{-}CL}$ Contact input speed control 1 2.2.4	
12	$\overline{N\text{-}CL}$ Reverse rotation torque limit 2.1.3		2.2.4	$\overline{N\text{-}CL}$ Contact input speed control 2	$\overline{N\text{-}CL}$ Contact input speed control 2	
13	P-IN +12 to 24V power supply 2.2.3					
14	$\overline{S\text{-}ON}$ Servo ON 2.5.2					
15	$\overline{P\text{-}CON}$ Proportional control 2.2.1		$\overline{P\text{-}CON}$ Zero-clamp operation reference 2.4.3	$\overline{P\text{-}CON}$ Rotation direction reference 2.2.4	$\overline{P\text{-}CON}$ Rotation direction reference 2.2.4	
16	P-OT Forward rotation prohibited 2.1.2					

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specifications	Standard Specifications		Torque Limit Output	Zero-clamp	Contact Input Speed Control		Speed Control with Torque Restriction by Analog Voltage Reference
Memory Switch Setting	Standard Setting		Cn-01 Bit 4 = 1	Cn-01 Bit A = 1 Bit B = 0	Cn-02 Bit 2 = 1 Cn-01 Bit B = 0	Cn-02 Bit 2 = 1 Cn-01 Bit B = 1	Cn-02 Bit F = 1
CN1 Terminal No.							
17	N-OT Reverse rotation prohibited		2.1.2				
18	$\overline{\text{ALMRST}}$ Alarm reset		2.5.1				
19	SG-PG Signal ground for PG signal output		2.2.2				
20	PAO Phase A	PG signal output					
21	*PAO Phase $\overline{A}$						
22	PBO Phase B		2.2.2				
23	*PBO Phase $\overline{B}$						
24	PCO Phase C						
25	*PCO Phase $\overline{C}$						
26	--- (Unused)						
27	--- (Unused)						
28	--- (Unused)						
29	--- (Unused)						
30	ALO1 Alarm code output						
31	ALO2 Alarm code output						
32	ALO3 Alarm code output		2.5.1				
33	SG-AL Signal ground for alarm code output						
34	ALM Alarm output		2.5.1				
35	ALM-SG Signal ground for alarm output						
36	FG Frame ground		2.2.2				

Note Information described in the "Standard Specifications" column is also applicable to blank columns.
Number "x.x.x" in box represents a section number corresponding to each signal name. For example, 2.2.1 represents Section 2.2.1.

B

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

List of I/O Signals (2)

CN1 Terminal No.

Specifications	Standard Specifications	Torque Control I	Torque Control II		
Memory Switch Setting	Standard Setting	Cn-01 Bit A = 0, B = 1	Cn-01 Bit A = 1, B = 1		
			$\overline{\text{P-CON}}$ = OFF	$\overline{\text{P-CON}}$ = ON	
			---	Cn-01 Bit F = 0 Cn-02 Bit F = 0	Cn-01 Bit F = 0 Cn-02 Bit F = 1
1	--- (Unused)	T-REF Torque reference	T-REF Torque reference	--- (Unused)	T-REF Torque limit value
2	--- (Unused)	SG-T Signal ground for torque reference 2.1.3	SG-T Signal ground for torque reference	--- (Unused)	SG-T Signal ground for torque limit value 2.2.5
3	V-REF Speed reference input	--- (Unused)	V-REF Speed limit value	V-REF Speed reference	V-REF Speed reference
4	SG-V Signal ground for speed reference input 2.2.1	--- (Unused)	SG-V Signal ground for speed limit value 2.2.5	SG-V Signal ground for speed reference 2.2.5	SG-V Signal ground for speed reference 2.2.5
5	--- (Unused)				
6	--- (Unused)				
7	$\overline{\text{BK}}$ Brake interlock output 2.4.4				
8	--- (Unused)				
9	$\overline{\text{TGON}}$ Running output 2.5.3				
10	SG-COM Signal ground common 2.2.3				
11	$\overline{\text{P-CL}}$ Forward rotation torque limit 2.1.3				
12	$\overline{\text{N-CL}}$ Reverse rotation torque limit 2.1.3				
13	P-IN +12 to 24V power supply 2.2.3				
14	$\overline{\text{S-ON}}$ Servo ON 2.5.2				
15	$\overline{\text{P-CON}}$ Proportional control 2.2.1				
16	P-OT Forward rotation prohibited 2.1.2				
17	N-OT Reverse rotation prohibited 2.1.2				
18	$\overline{\text{ALMRST}}$ Alarm reset 2.5.1				
19	SG-PG Signal ground for PG signal output 2.2.2				

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specifications	Standard Specifications		Torque Control I	Torque Control II		
Memory Switch Setting	Standard Setting		Cn-01 Bit A = 0, B = 1	Cn-01 Bit A = 1, B = 1		
				P-CON = OFF	P-CON = ON	
				---	Cn-01 Bit F = 0 Cn-02 Bit F = 0	Cn-01 Bit F = 0 Cn-02 Bit F = 1
CN1 Terminal No.						
20	PAO Phase A	PG signal output	2.2.2			
21	*PAO Phase $\overline{A}$					
22	PBO Phase B					
23	*PBO Phase $\overline{B}$					
24	PCO Phase C					
25	*PCO Phase $\overline{C}$					
26	--- (Unused)					
27	--- (Unused)					
28	--- (Unused)					
29	--- (Unused)					
30	ALO1 Alarm code output					
31	ALO2 Alarm code output					
32	ALO3 Alarm code output		2.5.1			
33	SG-AL Signal ground for alarm code output					
34	ALM Alarm output		2.5.1			
35	ALM-SG Signal ground for alarm output					
36	FG Frame ground		2.2.2			

Note Information described in the "Standard Specifications" column is also applicable to blank columns.
Number "x.x.x" in box represents a section number corresponding to each signal name. For example, 2.2.1 represents Section 2.2.1.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Appendix C

List of User Constants

- Σ-Series Servopacks provide many functions, and have parameters called "user constants" to allow the user to select each function and perform fine adjustment. This appendix lists these user constants.

- User constants are divided into the following two types:

1) Memory switch Cn-01, Cn-02	Each bit of this switch is turned ON or OFF to select a function.
2) User constant setting Cn-03 and later	A numerical value such as speed loop gain is set in this constant.

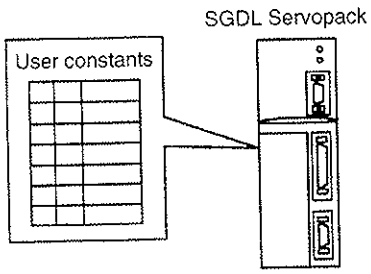

Note 1) Refer to *Chapter 2* for details of how to use user constants.

2) For details of how to set user constants, refer to *Section 3.1.5 Operation in User Constant Setting Mode.*

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

List of User Constants (User Constant Setting)

User Constant No.	Code	Name	Unit	Lower Limit	Upper Limit	Factory Setting	Remarks
Cn-00	Not a user constant. (Cn-00 is used to select special mode for digital operator.)						
Cn-01	Memory switch (see on page 245.)						See note 1
Cn-02	Memory switch (see on page 245.)						See note 1
Cn-03	VREFGN	Speed reference gain	(r/min)/V	0	2162	500	
Cn-04	LOOPHZ	Speed loop gain	Hz	1	2000	80	See note 2
Cn-05	PITIME	Speed loop integration time constant	1/s	2	10000	20	See note 2
Cn-07	SFSACC	Soft start time (acceleration)	ms	0	10000	0	
Cn-08	TLMTF	Forward rotation torque limit	%	0	Maximum torque	Maximum torque	
Cn-09	TLMTR	Reverse rotation torque limit	%	0	Maximum torque	Maximum torque	
Cn-0A	PGRAT	Dividing ratio setting	P/R	16	32769	1024	See note 1
Cn-0B	TGONLV	Zero-speed level	r/min	1	Maximum speed	20	
Cn-0C	TRQMSW	Mode switch (torque reference)	%	0	Maximum torque	200	
Cn-0F	ZCLVL	Zero-clamp level	r/min	0	16383	10	
Cn-12	BRKTIM	Time delay from brake reference until servo OFF	10 ms	0	50	0	
Cn-13	TCRFGN	Torque reference gain	(0.1V/ rated torque)	10	100	30	
Cn-14	TCRLMT	Speed limit for torque control I	r/min	0	Maximum speed	Maximum speed	
Cn-17	TRQFIL	Torque reference filter time constant	100 µs	0	250	4	
Cn-18	CLMIF	Forward external torque limit	%	0	Maximum torque	100	
Cn-19	CLMIR	Reverse external torque limit	%	0	Maximum torque	100	
Cn-1A	POSGN	Position loop gain	1/s	1	500	40	See note 3
Cn-1F	SPEED1	1st speed (contact input speed control)	r/min	0	Maximum speed	100	
Cn-20	SPEED2	2nd speed (contact input speed control)	r/min	0	Maximum speed	200	
Cn-21	SPEED3	3rd speed (contact input speed control)	r/min	0	Maximum speed	300	
Cn-23	SFSDEC	Soft start time (deceleration)	ms	0	10000	0	

Note 1) After changing the setting, always turn the power OFF, then ON. This makes the new set ting valid.
2) Automatically set by autotuning function
3) Valid only when zero-clamp function is used

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

List of User Constants (Memory Switch Setting)

User Constant No.	Bit No.	Setting				Factory Setting
Cn-01	0	0		1		0
		Uses servo ON input (S-ON).		Always servo ON.		
	2	0		1		0
		Uses forward rotation prohibited input (P-OT).		Forward rotation is always possible.		
	3	0		1		0
		Uses reverse rotation prohibited input (N-OT).		Reverse rotation is always possible.		
	4	0		1		0
		Uses TGON signal (TGON) as running output.		Uses TGON signal (TGON) as torque limit output.		
	8	0		1		0
		Stops the motor by applying dynamic brake when overtravel is detected (P-OT, N-OT) .		Decelerates the motor to a stop by applying the maximum torque when overtravel is detected (P-OT, N-OT) .		
	B•A	0•0	0•1	1•0	1•1	0•0
		Speed control	Speed control with zero-clamp function	Torque control I	Torque control II	
Cn-02	0	0		1		0
		Defines counterclockwise (CCW) rotation as forward rotation.		Defines clockwise (CW) rotation as forward rotation (reverse rotation mode).		
	2	0		1		0
		Does not use contact input speed control.		Uses contact input speed control.		
	C	0		1		0
		Torque reference filter: primary		Torque reference filter: secondary		
	F	0		1		0
		Uses torque reference input.		Uses torque limit input as analog voltage reference.		

C

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Numbers

CN1 connector
  dimensional drawings, 203
  specifications, 203

CN1 connector kit, 13

A

AC servomotor sizing software, 89

alarm code output, 72

alarm output signals, wiring, 72

alarm signal circuit, test run, 22

alarm traceback data, clearing, 121

alarm traceback mode, 110

alarms
  display, troubleshooting, 220
  Servo, resetting using Digital Operator, 99
  servo, reset, 99

alignment, 6
  radial load, 6
  thrust load, 6

autotuning, 116
  adjustment of speed-control Servopacks, 240
  precautions, 119

autotuning function, 62
  Digital Operators, 115

B

bits, turning ON and OFF, 105

brake power supply, 12
  dimensional drawings, 197
  internal circuit, 198
  specifications, 197

C

cables, 80
  encoders
    dimensional drawings, 199
    specifications, 199
  for connecting PC and Servopack, 213
  motor
    connectors, 194
    dimensional drawings, 190
    specifications, 190
  specifications, 187
  tension, 80

connections
  contact input signal terminals, 49
  contact output signal terminals, 50
  I/O signal terminals, Servopack, 16

connector kits, 193
  dimension drawings, 193
  specifications, 193

connector terminal block conversion unit, 13

connectors
  1CN, test run, 22
  encoder cables, 193
  incremental encoder, 94
  motor cables, 194
  standard-type motor without brake, 94
  standard-type motor with brake, 95
  terminal layouts, 93

contact input signal terminals, connections, 49

contact input speed control function, 51
  motor speeds, 52
  prohibiting, 42
  soft start time, 52

contact output signal terminals, connections, 50

D

Digital Operators, 13
  alarm traceback mode, 110
  autotuning, 115
  connection, 98
  dimensional drawings, 181
  mode selection, 100
    monitor mode, 107
    status display mode, 101
    user constant setting mode, 102
  motor operation, 112
  selection, 144
    flowchart, 144
  servo alarm reset, 99
  simple motor check, 112
  test run, 23

dimensional diagrams, noise filter, 208

dimensional drawings, 164
  1CN connector, 203
  brake power supply, 197

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

cables, encoders, 199
connector kits, 193
Digital Operators, 181
magnetic contactor, 209
motor cables, 190
regenerative unit, 211
Servomotors, 164–202
Servopacks, 178

dividing, 47

dynamic brake, 68

E

encoder output, 47
signals, divided, 47

encoders, cables
connectors, 193
dimensional drawings, 199
specifications, 199

external torque limit, 40

external torque limit input, 41
forward, 41
reverse, 41

F

fuse, 82

G

gain, adjustment, 62
AC Servopack, 238
setting references, load inertia ratio, 244

Ground terminal, 14

ground wire, 80

ground-fault interrupter, 3

grounding, 3
wiring, 83

H

high-voltage lines, Servopacks, 91

holding brake, 70
electrical specifications, SGME Servomotors, 151

host controllers, 13

hot start, 159

I

I/O signal terminals, connections, 16
list, 248, 250

impact resistance, 155

input signal terminals
alarm reset, 75
forward external torque limit input, 41
forward rotation prohibited, 35
I/O power supply, 49
motor rotation direction, 54
proportional/integral control, 46
reverse external torque limit input, 41
reverse rotation prohibited, 35
servo ON, 75
signal ground for speed reference input, 43, 58
signal ground for torque reference input, 58
speed reference input, 43, 58
speed selection, 53
torque reference input, 58
torque/speed changeover, 59
zero-clamp speed control, 69

inspection, 218, 219
Servomotors, 218
Servopacks, 219

installation, 4
servomotor, alignment, 6
Servomotors, 5
Servopacks, 8

internal torque limit, 37

L

limit switch, 35
overtravel limit function, 35

load inertia, 160
gain settings, 244

loads
allowable radial load, 154
allowable thrust load, 154

M

machine data table, 140

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

machine rigidity, 115
  selection, 119
magnetic contactor, 12
  dimensional drawings, 209
  internal connection diagram, 209
  specifications, 209
maintenance, 218, 219
  Servomotors, 218
  Servopacks, 219
MCCB, 12, 81, 82, 207
mechanical tolerance, 154
memory switches
  See⇒ user constants
mode selection, Digital Operators, 100
mode switch, 65
  detection points, torque reference, 66
molded-case circuit breaker
  See⇒ MCCB
monitor mode, 107
motor
  checking, Digital Operators, 112
  operation, Digital Operators, 112
  type check, 122

N

N-OT input signal, 36
noise control, 3
  filter, 12, 81
    dimensional diagrams, 208
    installation, 84
    specifications, 208
  wiring, 82

O

output phase, form, 48
  absolute encoder, 48
  incremental encoder, 48
output signal terminals
  alarm code output, 73
  brake interlock output, 71
  encoder output, 48
  frame ground, 48
  output signal ground common, 50
  running output, 76
  servo alarm output, 72
  signal ground for alarm code output, 73
  signal ground for encoder output, 48
  signal ground for servo alarm output, 72
  torque limit output, 37
overhanging load
  precautions, 3
  Servomotors, 162
overload, characteristics, Servopacks, 159
overtravel limit function, 35
  limit switch, 35

P

P-OT input signal, 36
peripheral devices
  selection, 182
    flowchart, 183
  specifications, 187
  wiring, 11
personal computer, 13
Power Consumption, 163
Power Failure, 78
Power Loss, 10
precautions, 2
pressure control, 55
proportional control, 64
proportional/integral control, 64
  signal, 46
protective sequence, 72
pulse dividing ratio, 48

R

radial load, 6
ratings
  100-VAC SGME Servomotors, 148
  200-VAC SGME Servomotors, 145
  SGDE Servopacks, 156
reference offset, 123
  automatic adjustment, 67, 123
  manual adjustment, 67
regenerative unit, 12, 88
  connection, 90

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

dimensional drawings, 211
specifications, 211

residual voltage, precautions, 2

reverse rotation mode, 34
user constant, 34

running output signal, 76

S

servo ON input signal, 75

Servomotors, 218
100-VAC SGME ratings, 148
100-VAC SGME specifications, 148
100-VAC SGME torque-motor speed characteristics, 150
200-VAC SGME ratings, 145
200-VAC SGME specifications, 145
200-VAC SGME torque-motor speed characteristics, 147
dimensional drawings, 164–202
inspection, 218
installation, 5
maintenance, 218
overhanging load, 162
selection, 131
flowchart, 133, 137
machine data table, 140
test run, 22

Servopacks, 219
AC, gain adjustment, 238
dimensional drawings, 178
high-voltage lines, 91
inspection, 219
installation, 8
instrument connection examples, 234
internal connection diagram, 234
maintenance, 219
overload characteristics, 159
ratings, 156
selection, 142
flowchart, 143
specifications, 156
speed-control
autotuning, 240
manual adjustment, 241

servos
alarm output, 72
alarm reset, 99
gain adjustment, 62

soft start function, 54, 64

software, version check, 123

specifications
100-VAC SGME Servomotors, 148
1CN connector, 203
200-VAC SGME Servomotors, 145
brake power supply, 197
cables, 187
encoders, 199
connector kits, 193
magnetic contactor, 209
noise filter, 208
peripheral devices, 187
regenerative unit, 211
SGDE Servopacks, 156

speed control, 45
zero-clamp, 45

speed reference offset, manual adjustment mode, 12

speed references, 43
gain, 46
inputs, 43

starting time, 160

status display mode, 101

stop mode, setting, 67

stopping time, 160

supply voltages, precautions, 2

surge suppressor, 210

T

tension control, 55

terminals
standard-type motor without brake, 94
standard-type motor with brake, 95

test run, 20
minimum user constants, 29
motor alone, 22
motor connected to the machine, 26
servomotor with brake, 28

thrust load, 6

torque control, 36, 55

torque limit
input signals, 42
output signal, 37

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

value, 61
torque reference filter time constant, 63
torque restriction function, 40
by analog voltage reference, 61
torque limit value, 40
troubleshooting
alarm display, 220
without alarm display, 233

U

user constant setting mode, 102
user constants, 34, 36, 42
contact input speed control function, 42
contact input speed control selection, 42, 51
control mode selection, 44
dividing ratio setting, 48
dividing ratio settings, 48
forward external torque limit, 41
forward rotation torque limit, 37
motor speeds, 52
N-OT input signal, 36
PI/P changeover, 64
P-OT input signal, 36
reverse external torque limit, 41
reverse rotation mode, 34
reverse rotation torque limit, 37
rotation direction selection, 34
servo ON input signal, 76
soft start time, 52, 64
speed limit for torque control I, 60
speed loop gain, 63
speed loop integration time constant, 63
speed reference gain, 46
TGON output signal selection, 39, 77
torque control, 55
torque reference filter time constant, 63
torque reference gain, 60, 61
torque restriction by analog voltage reference, 61
zero-clamp speed control, 69
zero-speed level, 78
zero-clamp level, 69

V

vibration class, 155
vibration resistance, 155
voltage resistance test, 3

W

wiring, 11, 14, 80
grounding, 83
main circuit, 14
more than one servo drive, 87
noise control, 82
peripheral devices, 11
precautions, 2, 80

Z

zero-clamp function, 46, 68

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Σ-L Series SGML/SGDL (for speed/torque control)
USER'S MANUAL

TOKYO OFFICE
New Pier Takeshiba South Tower, 1-16-1, Kaigan, Minatoku, Tokyo 105-6891 Japan
Phone 81-3-5402-4511 Fax 81-3-5402-4580

YASKAWA ELECTRIC AMERICA, INC.
2121 Norman Drive South, Waukegan, IL 60085, U.S.A.
Phone 1-847-887-7000 Fax 1-847-887-7370

MOTOMAN INC. HEADQUARTERS
805 Liberty Lane West Carrollton, OH 45449, U.S.A.
Phone 1-937-847-6200 Fax 1-937-847-6277

YASKAWA ELÉTRICO DO BRASIL COMÉRCIO LTDA.
Avenida Fagundes Filho, 620 Bairro Saude-Sao Pāulo-SP, Brazil CEP: 04304-000
Phone 55-11-5071-2552 Fax 55-11-5581-8795

YASKAWA ELECTRIC EUROPE GmbH
Am Kronberger Hang 2, 65824 Schwalbach, Germany
Phone 49-6196-569-300 Fax 49-6196-888-301

Motoman Robotics Europe AB
Box 504 S38525 Torsås, Sweden
Phone 46-486-48800 Fax 46-486-41410

Motoman Robotec GmbH
Kammerfeldstraβe 1, 85391 Allershausen, Germany
Phone 49-8166-900 Fax 49-8166-9039

YASKAWA ELECTRIC UK LTD.
1 Hunt Hill Orchardton Woods Cumbernauld, G68 9LF, United Kingdom
Phone 44-1236-735000 Fax 44-1236-458182

YASKAWA ELECTRIC KOREA CORPORATION
Kfpa Bldg #1201, 35-4 Youido-dong, Yeongdungpo-Ku, Seoul 150-010, Korea
Phone 82-2-784-7844 Fax 82-2-784-8495

YASKAWA ELECTRIC (SINGAPORE) PTE. LTD.
151 Lorong Chuan, #04-01, New Tech Park Singapore 556741, Singapore
Phone 65-282-3003 Fax 65-289-3003

YASKAWA ELECTRIC (SHANGHAI) CO., LTD.
4F No.18 Aona Road, Waigaoqiao Free Trade Zone, Pudong New Area, Shanghai 200131, China
Phone 86-21-5866-3470 Fax 86-21-5866-3869

YATEC ENGINEERING CORPORATION
Shen Hsiang Tang Sung Chiang Building 10F 146 Sung Chiang Road, Taipei, Taiwan
Phone 886-2-2563-0010 Fax 886-2-2567-4677

YASKAWA ELECTRIC (HK) COMPANY LIMITED
Rm. 2909-10, Hong Kong Plaza, 186-191 Connaught Road West, Hong Kong
Phone 852-2803-2385 Fax 852-2547-5773

BEIJING OFFICE
Room No. 301 Office Building of Beijing International Club, 21
Jianguomenwai Avenue, Beijing 100020, China
Phone 86-10-6532-1850 Fax 86-10-6532-1851

TAIPEI OFFICE
Shen Hsiang Tang Sung Chiang Building 10F 146 Sung Chiang Road, Taipei, Taiwan
Phone 886-2-2563-0010 Fax 886-2-2567-4677

SHANGHAI YASKAWA-TONGJI M & E CO., LTD.
27 Hui He Road Shanghai China 200437
Phone 86-21-6531-4242 Fax 86-21-6553-6060

BEIJING YASKAWA BEIKE AUTOMATION ENGINEERING CO., LTD.
30 Xue Yuan Road, Haidian, Beijing P.R. China Post Code: 100083
Phone 86-10-6233-2782 Fax 86-10-6232-1536

SHOUGANG MOTOMAN ROBOT CO., LTD.
7, Yongchang-North Street, Beijing Economic Technological Investment & Development Area,
Beijing 100076, P.R. China
Phone 86-10-6788-0551 Fax 86-10-6788-2878

YASKAWA ELECTRIC CORPORATION

YASKAWA

Specifications are subject to change without notice
for ongoing product modifications and improvements.

MANUAL NO. SIE-S800-15.32B
© Printed in Japan August 1999 98-3 ◇
99-7③
97-71130, -71134, -23090, -23092, -23094,
-23096, -23098, -23100

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP